



KEALEE

Design, build, deliver

PROJECT
1005 ROLLINS AVENUE
ADDRESS
1005 ROLLINS AVENUE
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-65
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
1 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Maryland Licensed Surveyor
certifies: boundary_determination, topographic_survey

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-100 — Existing Conditions and Boundary Plan
DISCIPLINE Maryland Licensed Surveyor
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	RSF-65
TAX / PARCEL ID	348854
GROSS TRACT AREA	9,596 SF 0.220 AC
LOT FRONTAGE	45' MIN 65.07'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	35% 35.0%
BUILDING FOOTPRINT	— 3,359 SF
DATUM	YES — DISTURBANCE
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	9,596 SF
2. Area of dwelling	3,359 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	9,596 SF
6. TOTAL AREA DISTURBED	11,596 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
1005 ROLLINS AVENUE	—	—	—	—	—	—
G: Sub; B: Basement; FF: Finished floor; SF: Subfloor; HT: Height; STY: Storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.						

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 38.1% impervious	9,596	0.220	—
PRE-DEVELOPMENT	SF	—	C
Pervious — lawn / meadow	9,596	—	0.25
Composite C	—	—	0.250
POST-DEVELOPMENT	SF	—	C
Proposed roof	3,359	—	0.05
Driveway and on-lot paving	393	—	0.05
Pervious — lawn	5,845	—	0.25
Composite C	—	—	0.524
Flow path	204 ft	—	—
Flow path slope	2.0 %	—	—
Time of concentration (Kirpich)	10-yr	—	5.0 min
Rainfall intensity, 10-yr	6.71 in/hr	—	6.71 in/hr
Peak discharge PRE, Q = CIA	0.37 cfs	—	0.37 cfs
Peak discharge POST, Q = CIA	0.77 cfs	—	0.77 cfs
INCREASE TO BE MANAGED	0.40 cfs	—	0.40 cfs
Rv = 0.05 + 0.0091	0.40 cfs	—	0.40 cfs
Water quality volume Wqv	321 cf	—	321 cf
Time of concentration by Kirpich over a 204 ft flow path at 2.0%, taken from the 2 ft contours across the catchment. A 5-minute flow applies.			
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.8753 N 76.9015 W.			
Water quality volume on a 1.0 in rainfall, Maryland Stormwater Design Manual, Vol. 1 & 2 — WQV on a 1.0 in rainfall.			
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.			
Sidewalk, curb and gutter and the driveway apron in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.			

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION: GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.


PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

REVISIONS

— NONE —

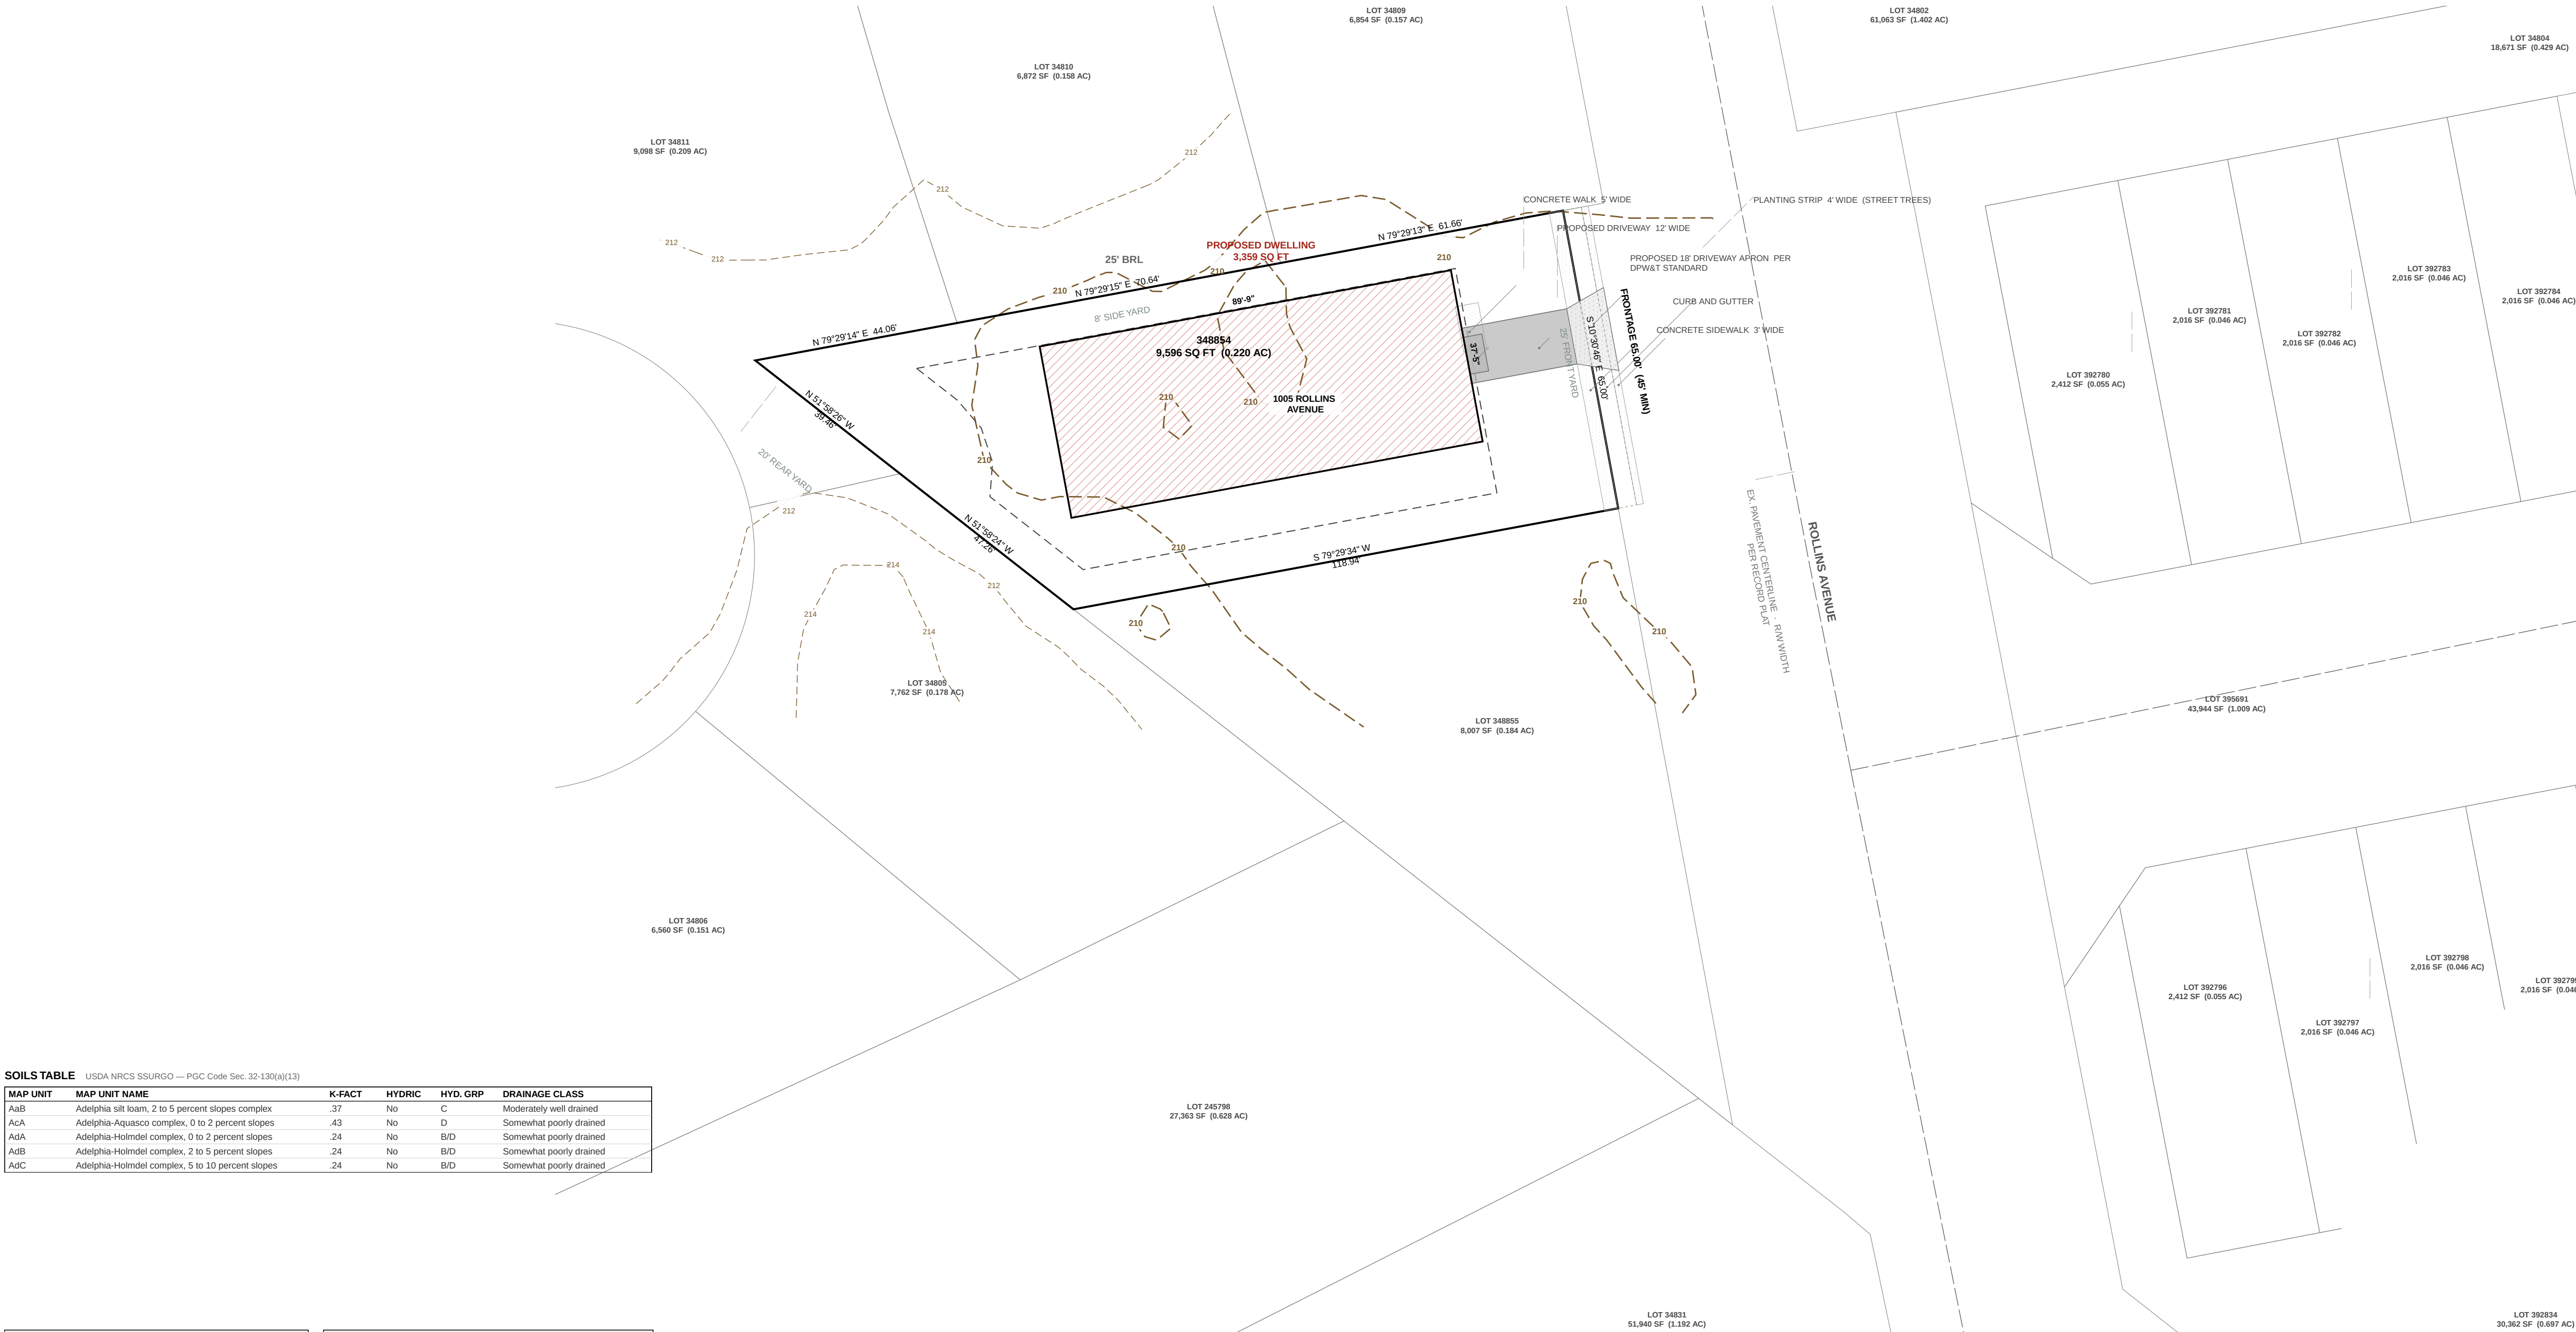


SOILS TABLE

USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

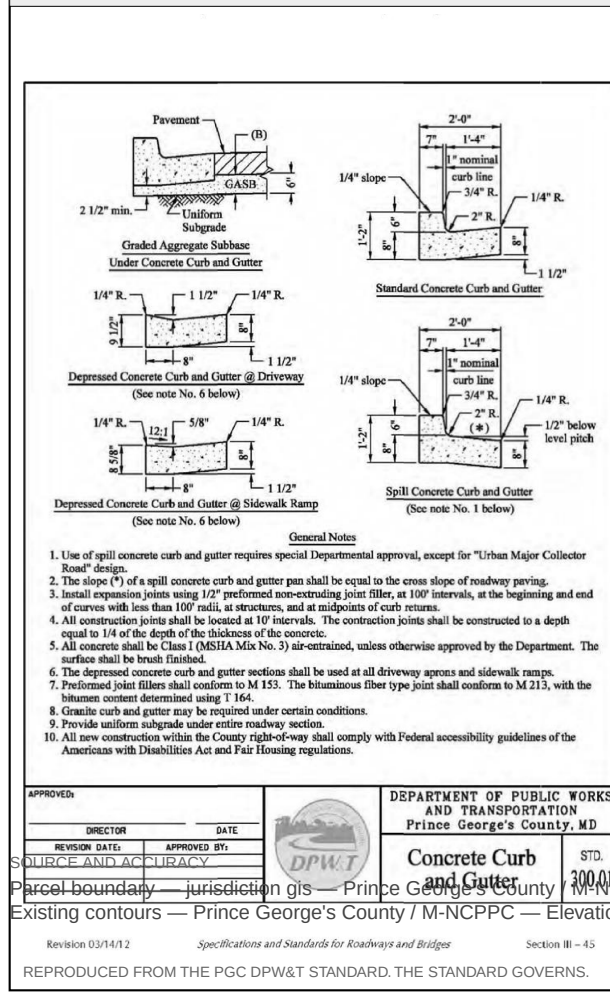

GRAPHIC SCALE — 1" = 20'


0 20 40 60 80 FEET


CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

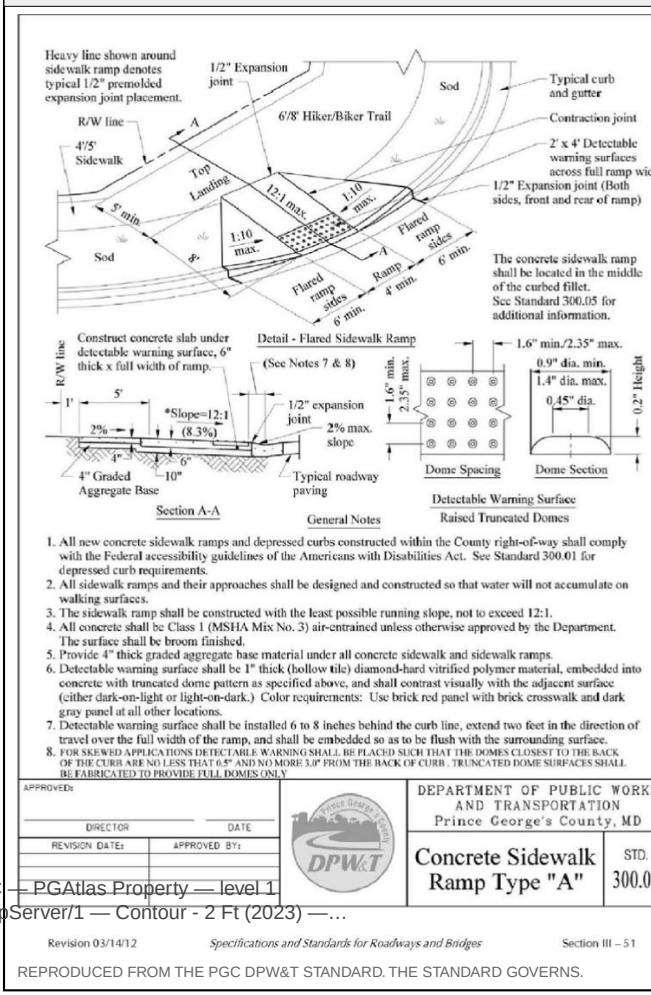

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.

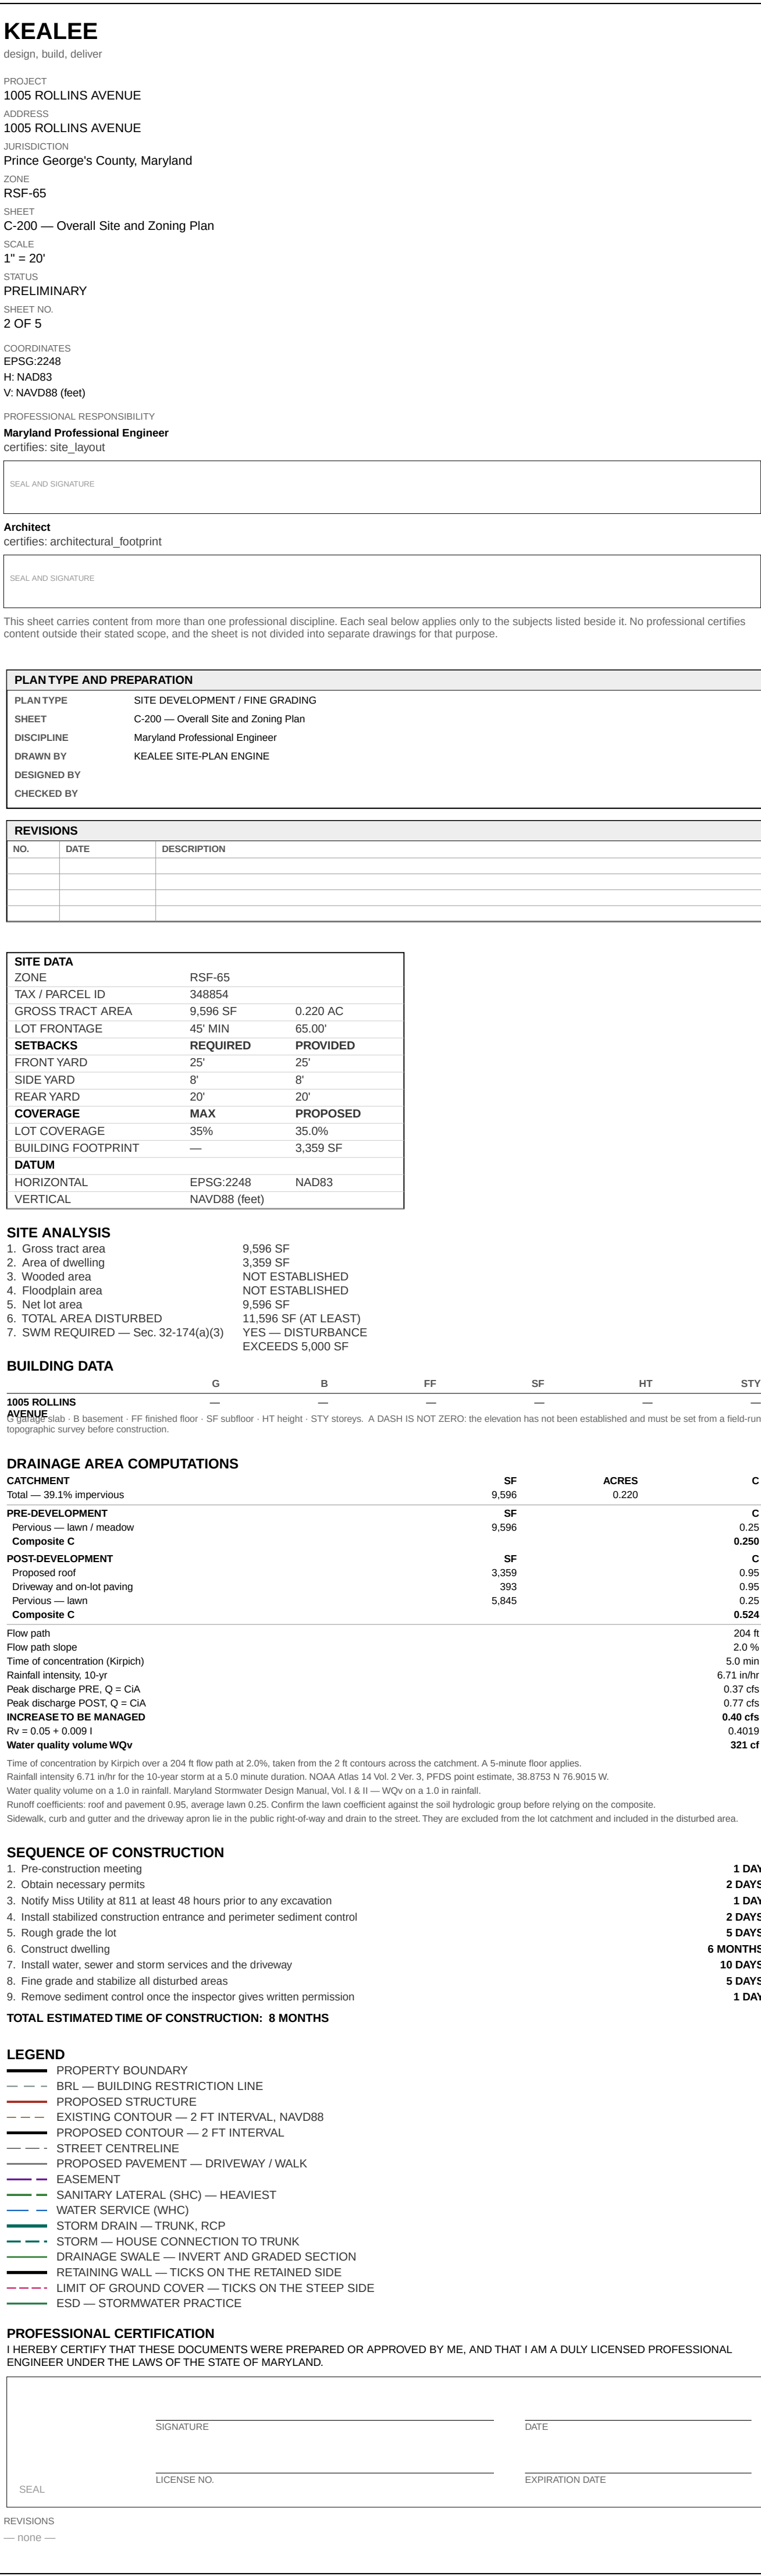

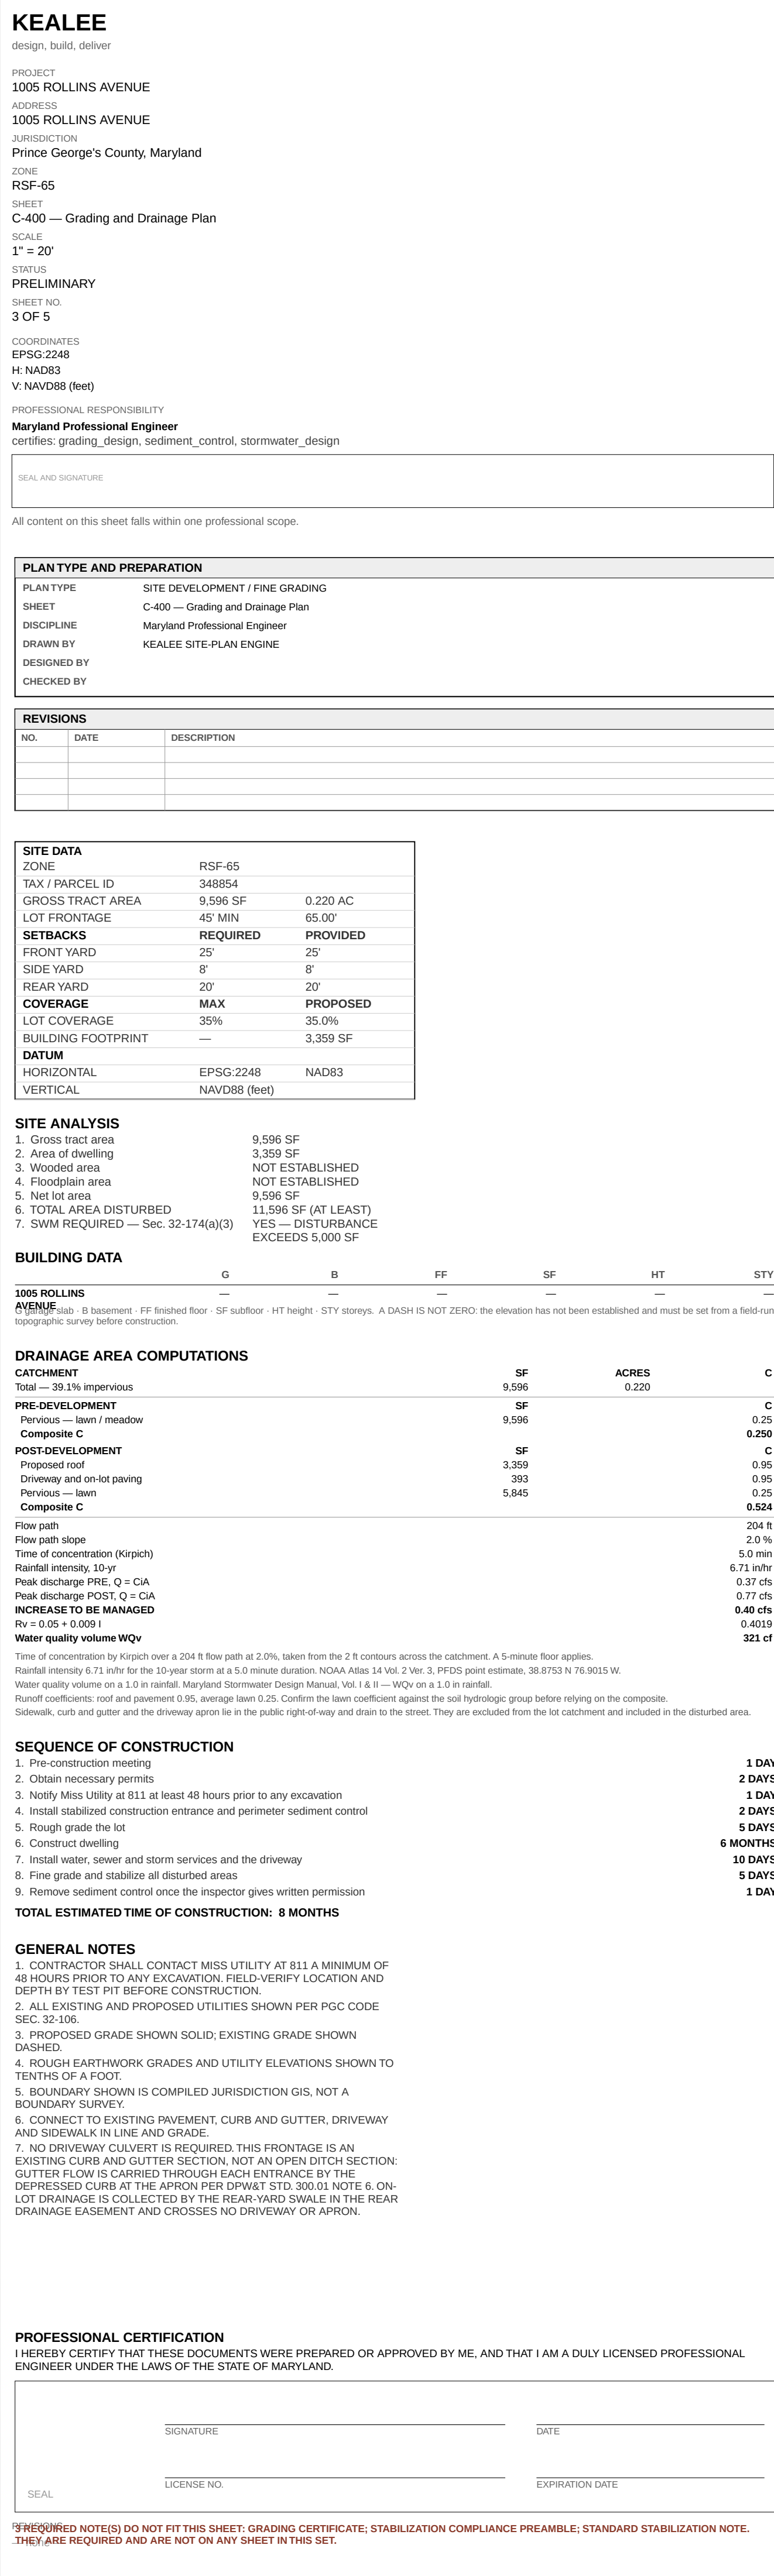



KEALEE

Design, build, deliver

PROJECT
1005 ROLLINS AVENUE
ADDRESS
1005 ROLLINS AVENUE
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-65
SHEET
C-500 — Utility Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)
PROFESSIONAL RESPONSIBILITY
Maryland Professional Engineer
certifies: Utility_Design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-500 — Utility Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	RSF-65
TAX / PARCEL ID	348854
GROSS TRACT AREA	9,596 SF 0.220 AC
LOT FRONTAGE	45' MIN 65.00'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	35% 35.0%
BUILDING FOOTPRINT	— 3,359 SF
DATUM	YES — DISTURBANCE
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

1. Gross tract area	9,596 SF
2. Area of dwelling	3,359 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	9,596 SF
6. TOTAL AREA DISTURBED	11,596 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
1005 ROLLINS AVENUE	—	—	—	—	—	—
G: Sub-Basement FF: Finished floor SF: Subfloor HT: Height STY: Storeys A DASH IS NOT ZERO the elevation has not been established and must be set from a field-run topographic survey before construction.						

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 38.1% impervious	9,596	0.220	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	9,596	0.25	
Composite C		0.250	
POST-DEVELOPMENT	SF		C
Proposed roof	3,359	0.05	
Driveway and on-lot paving	395	0.05	
Pervious — lawn	5,845	0.25	
Composite C		0.524	
Flow path	204 ft		
Flow path slope	2.0 %		
Time of concentration (Kirpich)	5.0 min		
Rainfall intensity, 10-yr	6.71 in/hr		
Peak discharge PRE, Q = CIA	0.37 cfs		
Peak discharge POST, Q = CIA	0.77 cfs		
INCREASE TO BE MANAGED	0.40 cfs		
Rv = 0.05 + 0.0091	0.40 cfs		
Water quality volume Wqv	321 cf		
Time of concentration by Kirpich over a 204 ft flow path at 2.0%, taken from the 2 ft contours across the catchment. A 5-minute flow applies.			
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.8753 N 76.9015 W.			
Water quality volume on a 1.0 in rainfall, Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.			
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.			
Sidewalk, curb and gutter and the driveway apron in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.			

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION: GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

REVISIONS

— NONE —

