



KEALEE

Design, build, deliver

PROJECT
3427 GROUSE CT, WOODBRIDGE, 22192
ADDRESS
3427 GROUSE CT, WOODBRIDGE, 22192
JURISDICTION
Prince William County, Virginia
ZONE
R-2
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
1 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Virginia Licensed Surveyor
certifies: boundary_determination, topographic_survey

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-100 — Existing Conditions and Boundary Plan
DISCIPLINE Virginia Licensed Surveyor
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-2
TAX / PARCEL ID	8293-10-5733
GROSS TRACT AREA	19,134 SF 0.439 AC
LOT FRONTAGE	— 24.30'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	35' 35'
SIDE YARD	10' 10'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 24.4%
BUILDING FOOTPRINT	— 4,669 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	19,134 SF
2. Area of dwelling	4,669 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	19,134 SF
6. TOTAL AREA DISTURBED	11,104 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH PRINCE WILLIAM COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
3427 GROUSE CT, WOODBRIDGE, 22192	—	—	—	—	—	—
G: Ground floor - SF: Subfloor - HT: Height - FF: Finished floor - SF: Subfloor - HT: Height - STY: Storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.						

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 34.6% impervious	19,134	0.439	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	19,134		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	4,669		0.05
Driveway and on-lot paving	1,950		0.05
Pervious — lawn	12,515		0.25
Composite C			0.492
Flow path	322 ft		
Flow path slope	6.2 %		
Time of concentration (Kirpich)	5.0 min		
Rainfall intensity, 10-yr	6.70 in/hr		
Peak discharge PRE, Q = CIA	0.74 cfs		
Peak discharge POST, Q = CIA	1.45 cfs		
INCREASE TO BE MANAGED	0.71 cfs		
Rv = 0.05 + 0.0091	0.3813		
Water quality volume WQv	576 cf		

Time of concentration by Kirpich over a 322 ft flow path at 6.2%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.70 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3. PF05 point estimate, 38.6730 N 77.3138 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. PRINCE WILLIAM COUNTY's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.05, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER PRINCE WILLIAM COUNTY STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NOTE —


SOILS TABLE

USDA NRCS SSURGO

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
10B	Buckhall loam, 2 to 7 percent slopes	.37	No	B	Well drained
10C	Buckhall loam, 7 to 15 percent slopes	.37	No	B	Well drained
11B	Calverton silt loam, 0 to 7 percent slopes	.49	No	D	Moderately well drained
12D	Calflett gravelly silt loam, 15 to 25 percent slopes	.55	No	D	Well drained
13B	Calflett-Sycolline complex, 2 to 7 percent slopes	.55	No	D	Well drained
13C	Calflett-Sycolline complex, 7 to 15 percent slopes	.55	No	D	Well drained



SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Prince William County — parcels — OLD BRIDGE ESTATES, Lot 0026A...
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 30'



SOILS TABLE — USDA NRCS SSURGO					
MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
10B	Buckhall loam, 2 to 7 percent slopes	.37	No	B	Well drained
10C	Buckhall loam, 7 to 15 percent slopes	.37	No	B	Well drained
11B	Calverton silt loam, 0 to 7 percent slopes	.49	No	D	Moderately well drained
12D	Callett gravelly silt loam, 15 to 25 percent slopes	.55	No	D	Well drained
13B	Callett-Sycoline complex, 2 to 7 percent slopes	.55	No	D	Well drained
13C	Callett-Sycoline complex, 7 to 15 percent slopes	.55	No	D	Well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Prince William County — parcels — OLD BRIDGE ESTATES, Lot 0026A...
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

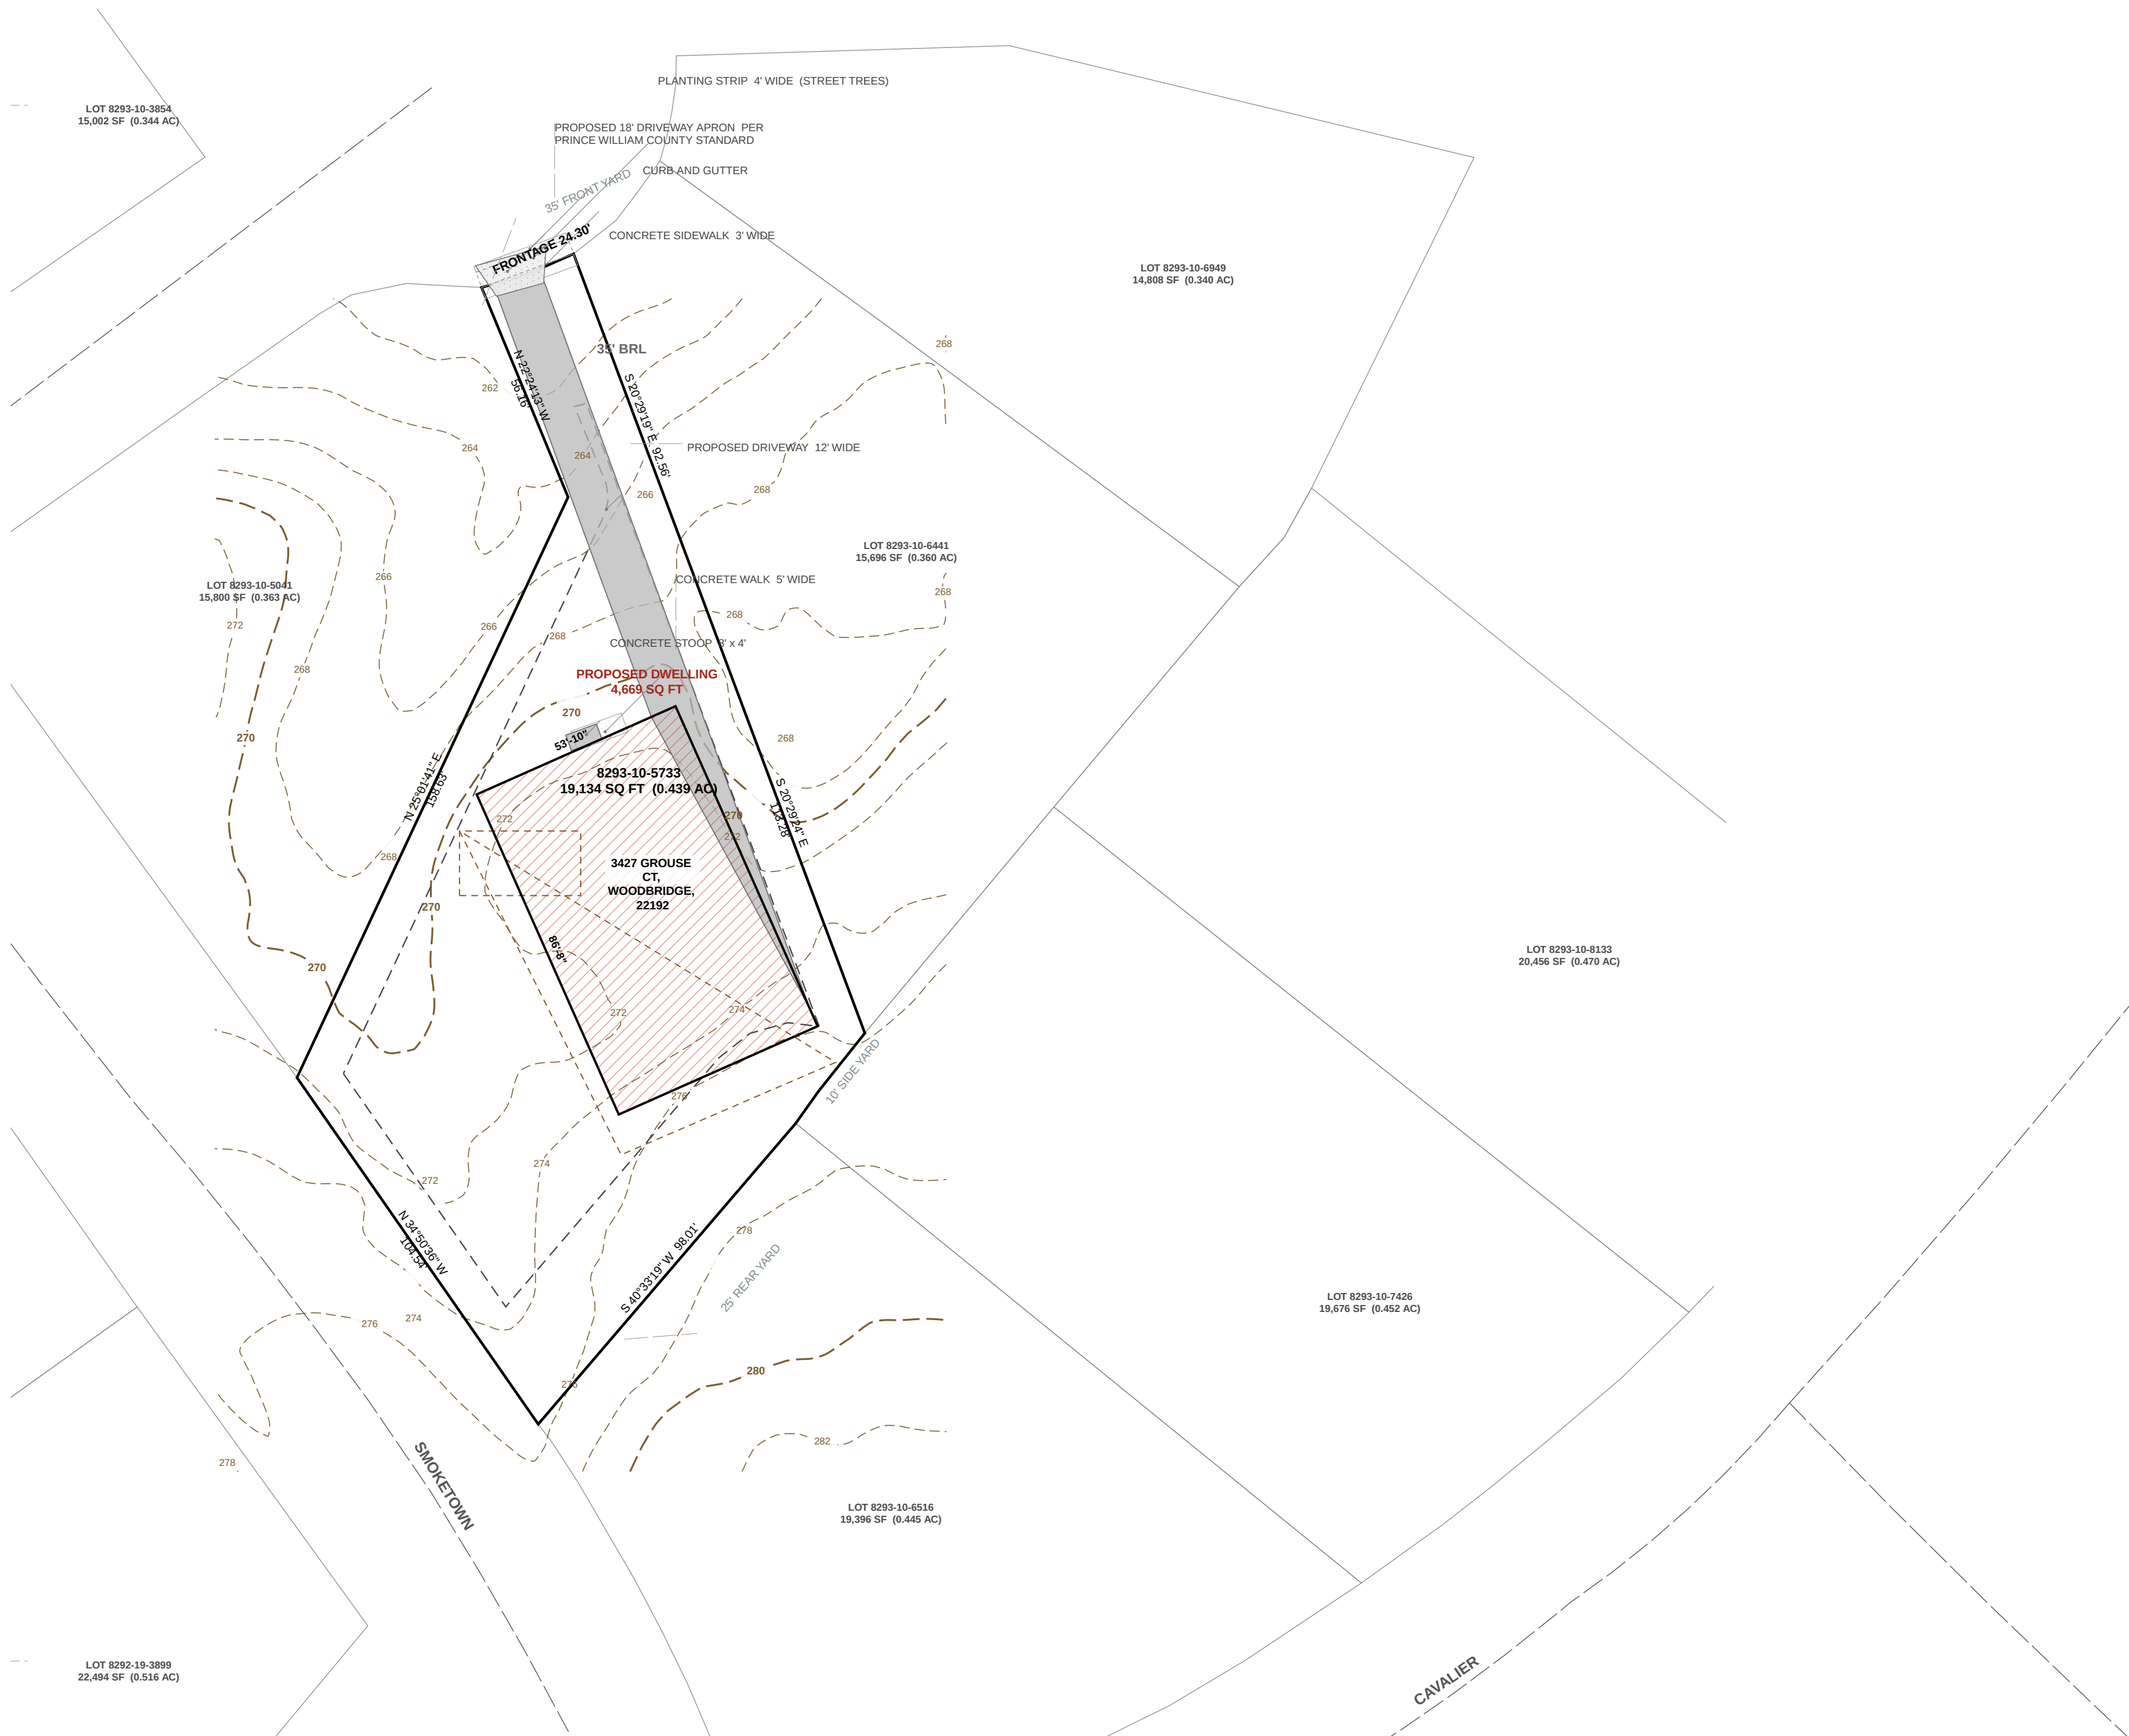

KEALEE

Design, build, deliver

PROJECT
3427 GROUSE CT, WOODBRIDGE, 22192
ADDRESS
3427 GROUSE CT, WOODBRIDGE, 22192
JURISDICTION
Prince William County, Virginia
ZONE
R-2
SHEET
C-200 — Overall Site and Zoning Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Virginia Professional Engineer
certifies: Site, layout

SEAL AND SIGNATURE

Architect
certifies: architectural_footprint

SEAL AND SIGNATURE

This sheet carries content from more than one professional discipline. Each seal below applies only to the subjects listed beside it. No professional certifies content outside their stated scope, and the sheet is not divided into separate drawings for that purpose.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-200 — Overall Site and Zoning Plan
DISCIPLINE Virginia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-2	
TAX / PARCEL ID	8293-10-5733	0.439 AC
GROSS TRACT AREA	19,134 SF	0.439 AC
LOT FRONTAGE	—	24.30'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	35'	35'
SIDE YARD	10'	10'
REAR YARD	25'	25'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	30%	24.4%
BUILDING FOOTPRINT	—	4,669 SF
DATUM	NAD83	
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD88 (feet)	

SITE ANALYSIS

1. Gross tract area	19,134 SF
2. Area of dwelling	4,669 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	19,134 SF
6. TOTAL AREA DISTURBED	11,104 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH PRINCE WILLIAM COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
3427 GROUSE CT, WOODBRIDGE, 22192	—	—	—	—	—	—

3427 GROUSE CT, WOODBRIDGE, 22192
Elevation: FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 34.6% impervious	19,134	0.439	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	19,134		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	4,669		0.95
Driveway and on-lot paving	1,950		0.95
Pervious — lawn	12,515		0.25
Composite C			0.482
Flow path			322 ft
Flow path slope			8.2 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.70 in/hr
Peak discharge PHE, Q = CIA			0.74 cfs
Peak discharge POST, Q = CIA			1.45 cfs
INCREASE TO BE MANAGED			0.71 cfs
Rv = 0.05 + 0.0081			0.3613
Water quality volume WQv			576 cf

Time of concentration by Kirpich over a 322 ft flow path at 6.2%, taken from the 2 ft contours across the catchment. A 5-minute flow applies.
Rainfall intensity 6.70 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.6730 N 77.3138 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only; PRINCE WILLIAM COUNTY's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

LEGEND

— — —	PROPERTY BOUNDARY
— — —	BRL — BUILDING RESTRICTION LINE
— — —	PROPOSED STRUCTURE
— — —	EXISTING CONTOUR — 2 FT INTERVAL, NAVD88
— — —	PROPOSED CONTOUR — 2 FT INTERVAL
— — —	STREET CENTRELINE
— — —	PROPOSED PAVEMENT — DRIVEWAY / WALK
— — —	EASEMENT
— — —	SANITARY LATERAL (SHC) — HEAVIEST
— — —	WATER SERVICE (WHC)
— — —	STORM DRAIN — TRUNK, RCP
— — —	STORM — HOUSE CONNECTION TO TRUNK
— — —	DRAINAGE SWALE — INVERT AND GRADED SECTION
— — —	RETAINING WALL — TICKS ON THE RETAINED SIDE
— — —	LIMIT OF GROUND COVER — TICKS ON THE STEEP SIDE
— — —	ESD — STORMWATER PRACTICE

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE	DATE
SEAL	LICENSE NO.
	EXPIRATION DATE

REVISIONS
— none —



KEALEE

Design, build, deliver

PROJECT
3427 GROUSE CT, WOODBRIDGE, 22192
ADDRESS
3427 GROUSE CT, WOODBRIDGE, 22192
JURISDICTION
Prince William County, Virginia
ZONE
R-2
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
3 OF 5
COORDINATES
EPSG-2248
H: NAD83
V: NAVD88 (feet)
PROFESSIONAL RESPONSIBILITY
Virginia Professional Engineer
certifies: grading_design, sediment_control, stormwater_design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Virginia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-2
TAX / PARCEL ID	8293-10-5733
GROSS TRACT AREA	19,134 SF 0.439 AC
LOT FRONTAGE	— 24.30'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	35' 35'
SIDE YARD	10' 10'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 24.4%
BUILDING FOOTPRINT	— 4,669 SF
DATUM	
HORIZONTAL	EPSG-2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	19,134 SF
2. Area of dwelling	4,669 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	19,134 SF
6. TOTAL AREA DISTURBED	11,104 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH PRINCE WILLIAM COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
3427 GROUSE CT, WOODBRIDGE, 22192	—	—	—	—	—	—
G: finished floor - B: finished floor - FF: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.						

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 34.6% impervious	19,134	0.439	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	19,134		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	4,669		0.95
Driveway and on-lot paving	1,950		0.95
Pervious — lawn	12,515		0.25
Composite C			0.492
Flow path	322 ft		
Flow path slope	6.2 %		
Time of concentration (Kirpich)	5.0 min		
Rainfall intensity, 10-yr	6.70 in/hr		
Peak discharge PRE, Q = CIA	0.74 cfs		
Peak discharge POST, Q = CIA	1.45 cfs		
INCREASE TO BE MANAGED	0.71 cfs		
Rv = 0.05 + 0.0091	0.3813		
Water quality volume WQv	576 cf		

Time of concentration by Kirpich over a 322 ft flow path at 6.2%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.70 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3, PF05 point estimate, 38.6730 N 77.3138 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. PRINCE WILLIAM COUNTY's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER PRINCE WILLIAM COUNTY STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE

DATE

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NOTE —

SOILS TABLE


USDA NRCS SSURGO

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
10B	Buckhall loam, 2 to 7 percent slopes	.37	No	B	Well drained
10C	Buckhall loam, 7 to 15 percent slopes	.37	No	B	Well drained
11B	Calverton silt loam, 0 to 7 percent slopes	.49	No	D	Moderately well drained
12D	Calflett gravelly silt loam, 15 to 25 percent slopes	.55	No	D	Well drained
13B	Calflett-Sycolline complex, 2 to 7 percent slopes	.55	No	D	Well drained
13C	Calflett-Sycolline complex, 7 to 15 percent slopes	.55	No	D	Well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Prince William County — parcels — OLD BRIDGE ESTATES, Lot 0026A...
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 30'



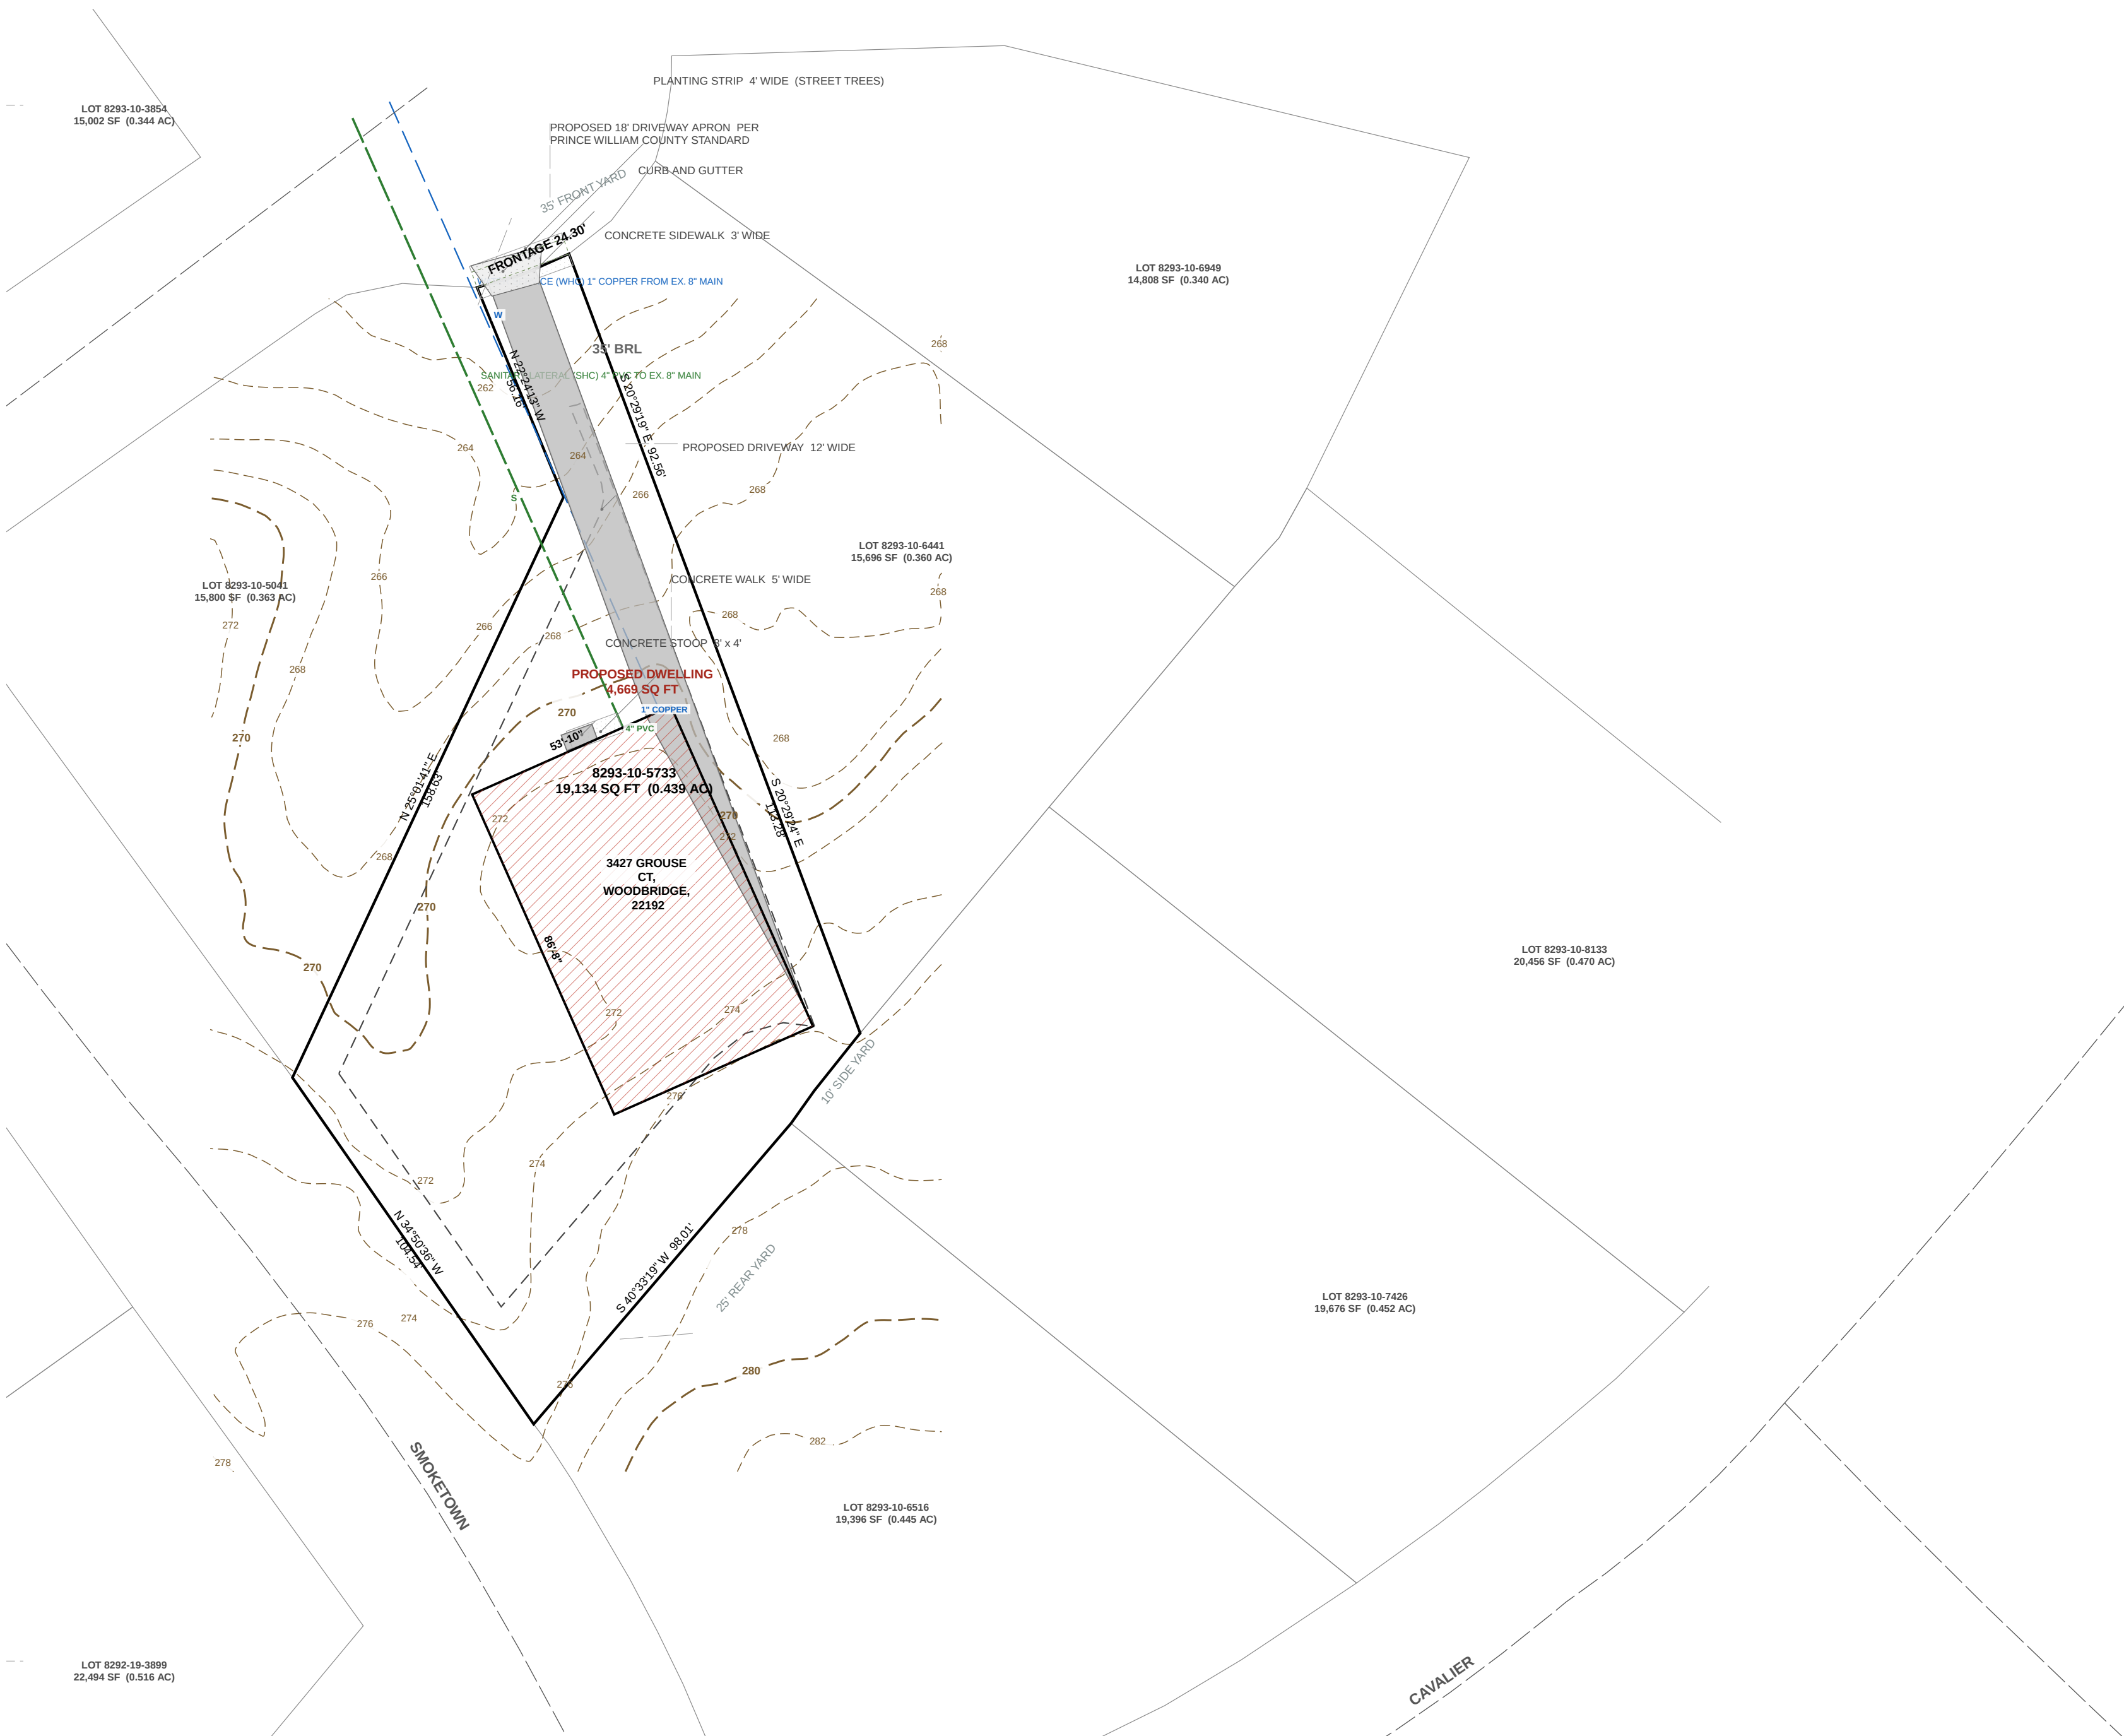

SOILS TABLE — USDA NRCS SSURGO					
MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP.	DRAINAGE CLASS
10B	Buckhall loam, 2 to 7 percent slopes	.37	No	B	Well drained
10C	Buckhall loam, 7 to 15 percent slopes	.37	No	B	Well drained
11B	Calverton silt loam, 0 to 7 percent slopes	.49	No	D	Moderately well drained
12D	Caffett gravelly silt loam, 15 to 25 percent slopes	.55	No	D	Well drained
13B	Caffett-Sycolline complex, 2 to 7 percent slopes	.55	No	D	Well drained
13C	Caffett-Sycolline complex, 7 to 15 percent slopes	.55	No	D	Well drained

KEALEE

Design, build, deliver

PROJECT
3427 GROUSE CT, WOODBRIDGE, 22192
ADDRESS
3427 GROUSE CT, WOODBRIDGE, 22192
JURISDICTION
Prince William County, Virginia
ZONE
R-2
SHEET
C-500 — Utility Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)
PROFESSIONAL RESPONSIBILITY
Virginia Professional Engineer
certifies: Utility Design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-500 — Utility Plan
DISCIPLINE Virginia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-2
TAX / PARCEL ID	8293-10-5733
GROSS TRACT AREA	19,134 SF 0.439 AC
LOT FRONTAGE	— 24.30'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	35' 35'
SIDE YARD	10' 10'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 24.4%
BUILDING FOOTPRINT	— 4,669 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	19,134 SF
2. Area of dwelling	4,669 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	19,134 SF
6. TOTAL AREA DISTURBED	11,104 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH PRINCE WILLIAM COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
3427 GROUSE CT, WOODBRIDGE, 22192	—	—	—	—	—	—
G: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.						

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 34.6% impervious	19,134	0.439	
PRE-DEVELOPMENT	SF		C
Previous — lawn / meadow	19,134		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	4,669		0.95
Driveway and on-lot paving	1,950		0.95
Previous — lawn	12,515		0.25
Composite C			0.492
Flow path	322 ft		
Flow path slope	6.2 %		
Time of concentration (Kirpich)	5.0 min		
Rainfall intensity, 10-yr	6.70 in/hr		
Peak discharge PRE, Q = CIA	0.74 cfs		
Peak discharge POST, Q = CIA	1.45 cfs		
INCREASE TO BE MANAGED	0.71 cfs		
Rv = 0.05 + 0.0091	0.3813		
Water quality volume WQv	576 cf		
Time of concentration by Kirpich over a 322 ft flow path at 6.2%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.			
Rainfall intensity 6.70 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3, PF05D point estimate, 38.6730 N 77.3138 W.			
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. PRINCE WILLIAM COUNTY's own stormwater method governs this lot.			
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.			
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.			

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER PRINCE WILLIAM COUNTY STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.


SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


REVISIONS

— NONE —

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Prince William County — parcels — OLD BRIDGE ESTATES; Lot 0026A...
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 30'





REVISIONS

GRAPHIC SCALE — 1" = 30'

