


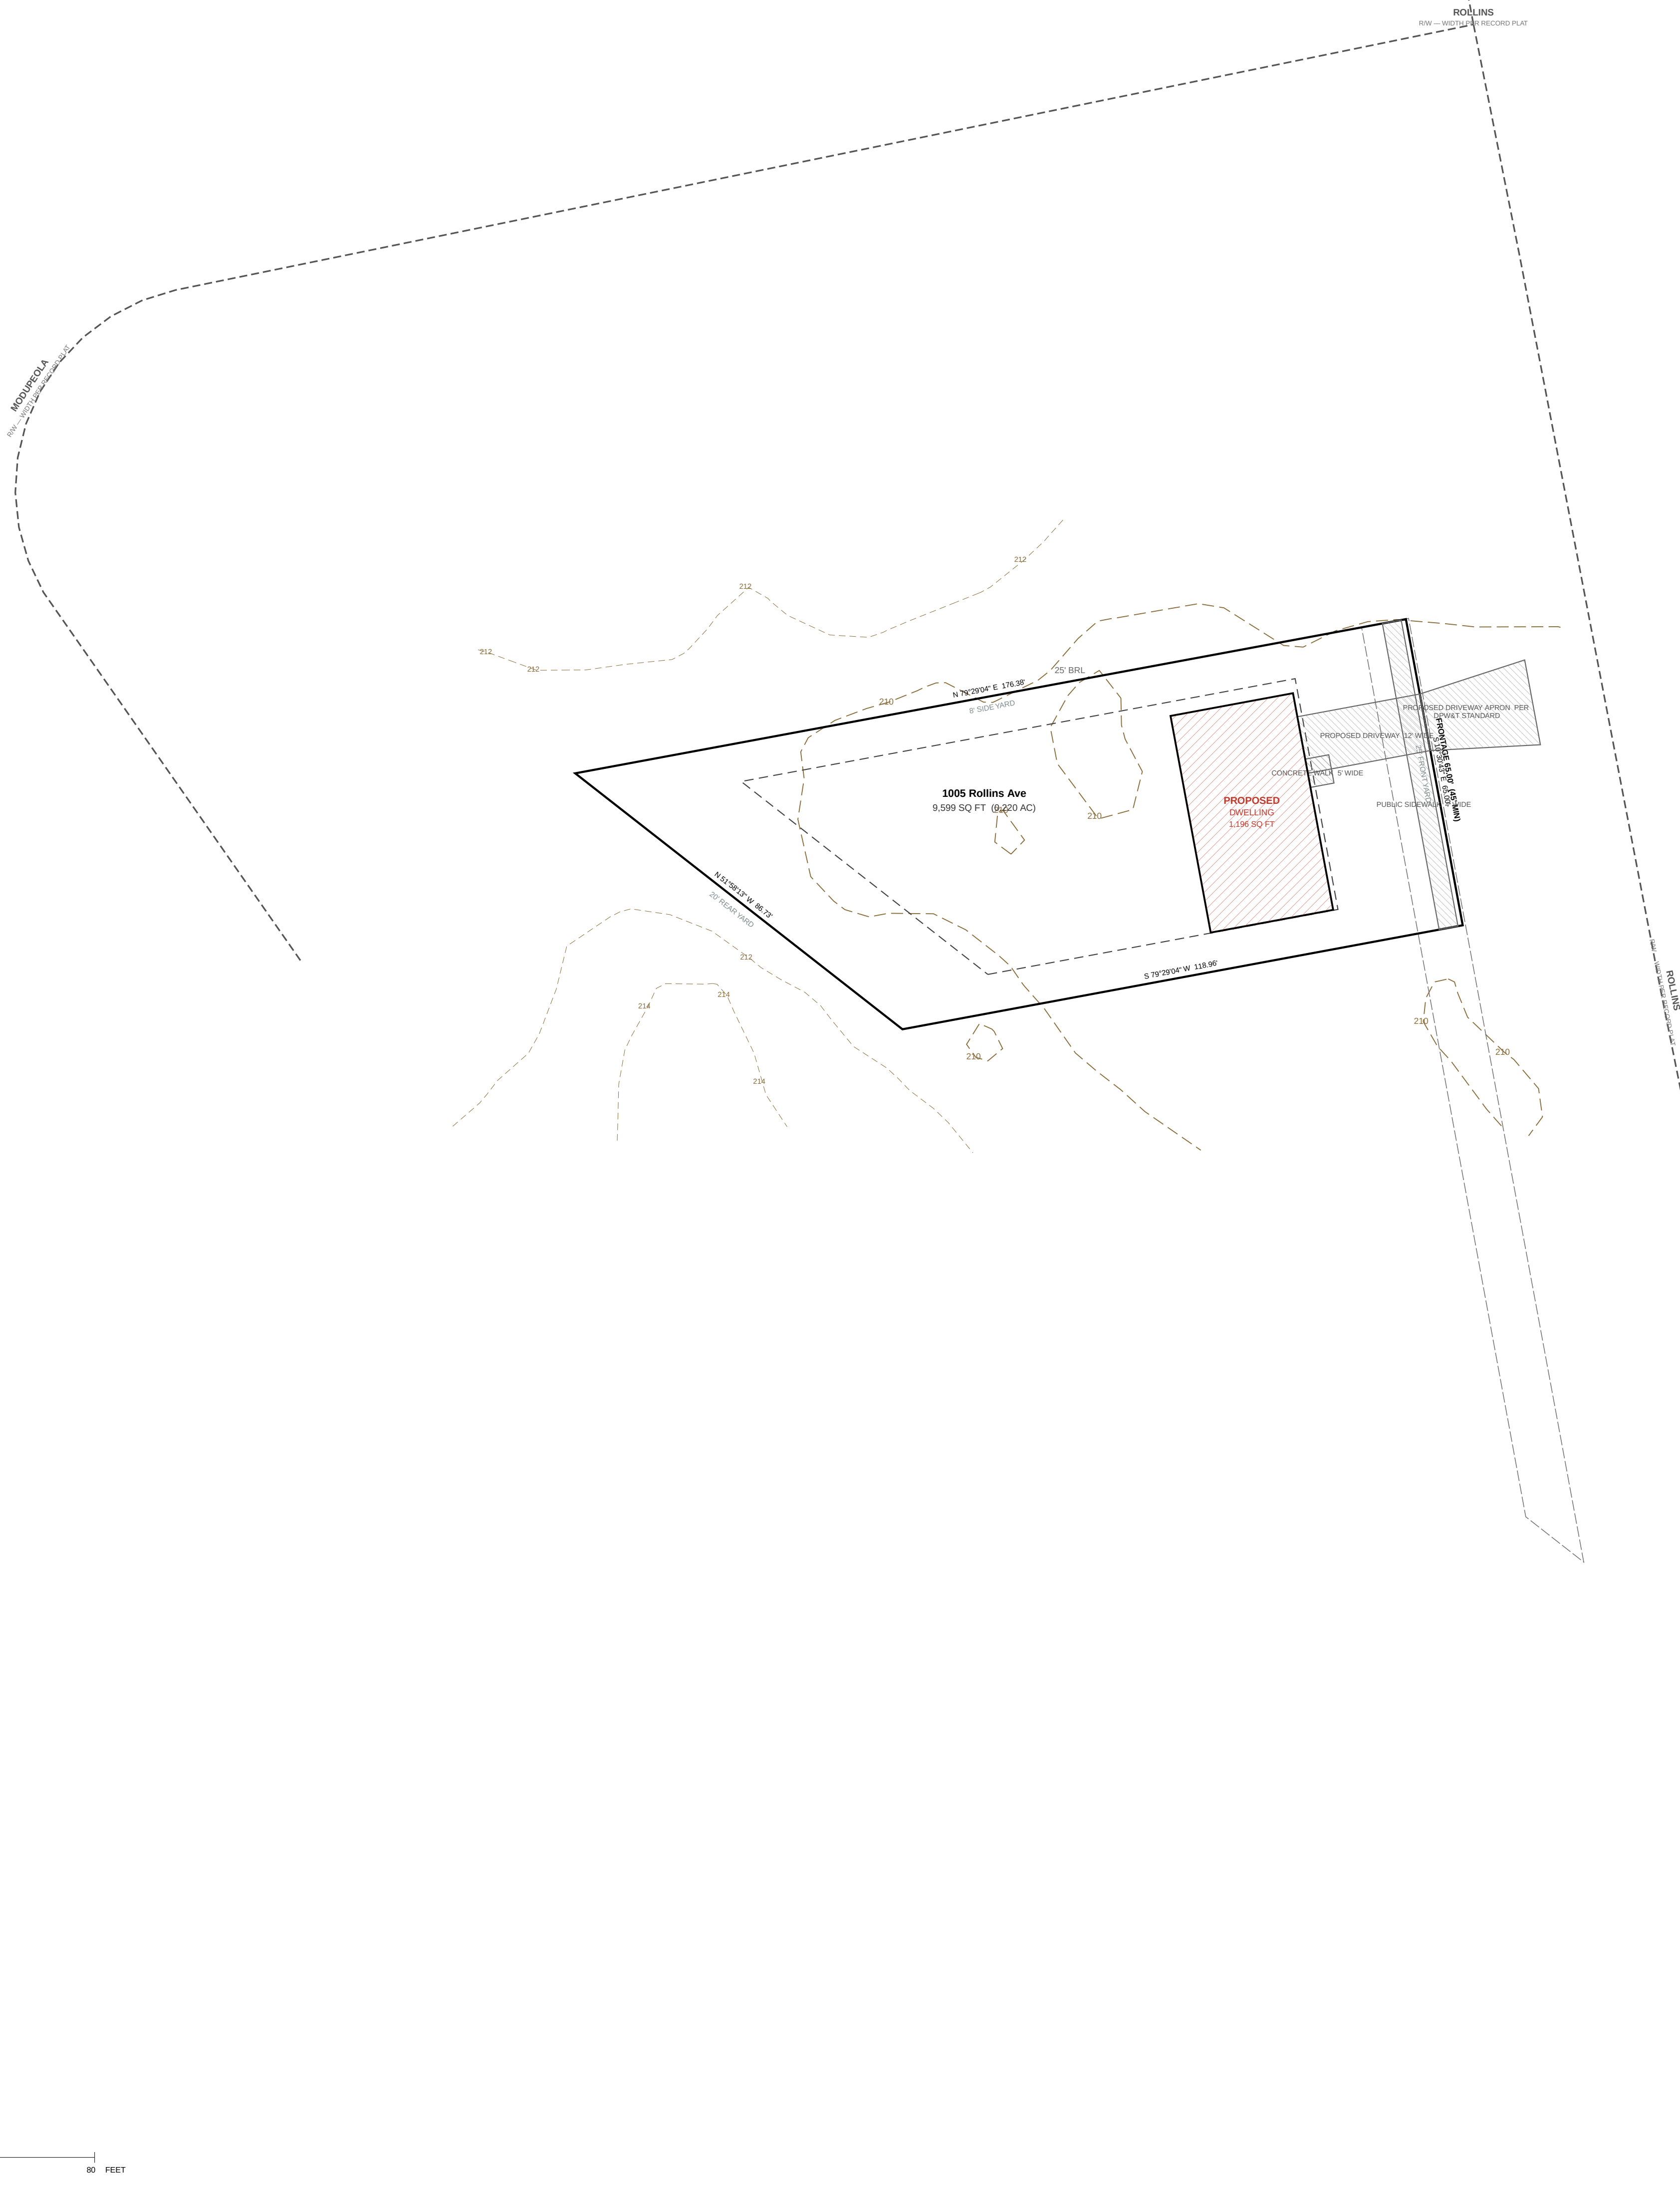

↑
N

KEALEE
design, build, deliver

PROJECT
1005 Rollins Ave

ADDRESS
1005 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-000 — Cover Sheet, Approvals and General Notes

SCALE
1" = 20'

STATUS
PRELIMINARY

SHEET NO.
1 OF 11

COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD**
Paper Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD**
- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND**
- PROPERTY BOUNDARY
 - BRL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT


PRINCE GEORGES COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —



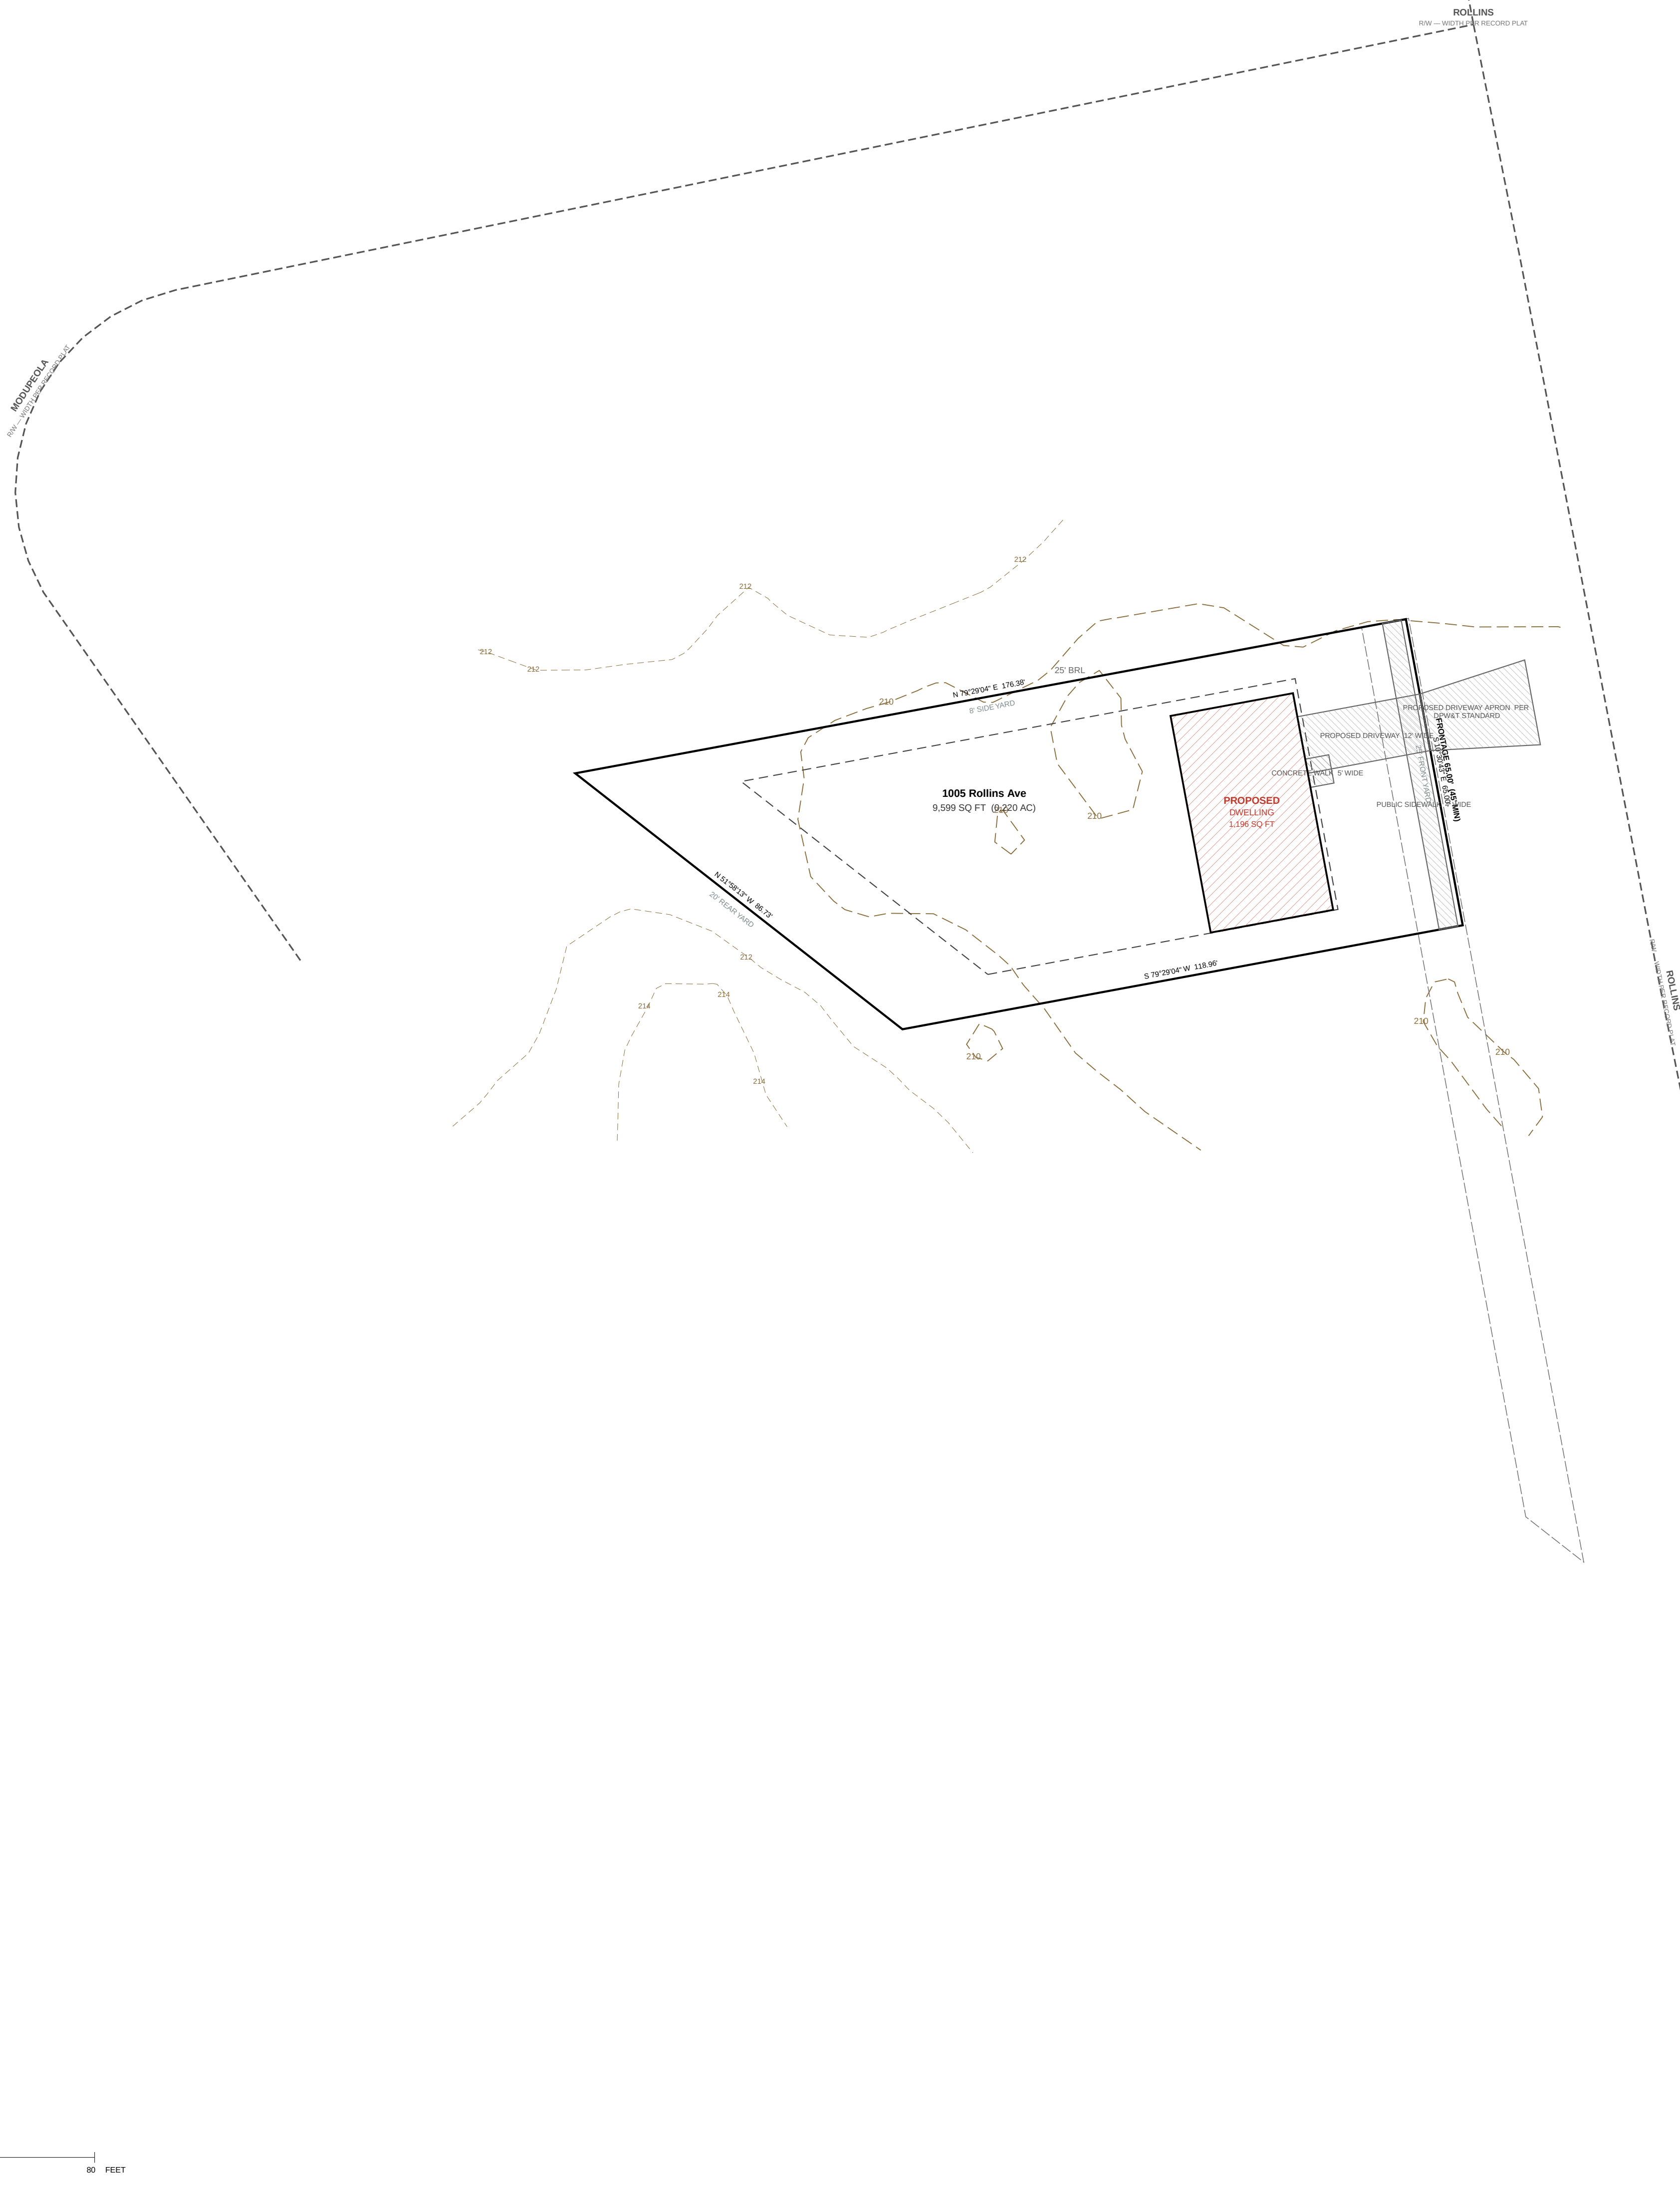

KEALEE
design, build, deliver

PROJECT
1005 Rollins Ave

ADDRESS
1005 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-100 — Existing Conditions and Boundary Plan

SCALE
1" = 20'

STATUS
PRELIMINARY

SHEET NO.
2 OF 11

COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
Paper Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASIS OF RECORDING: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND**
- PROPERTY BOUNDARY
 - BRL --- BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR --- PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT --- DRIVEWAY / WALK
 - EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE	DATE
-----------	------

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —



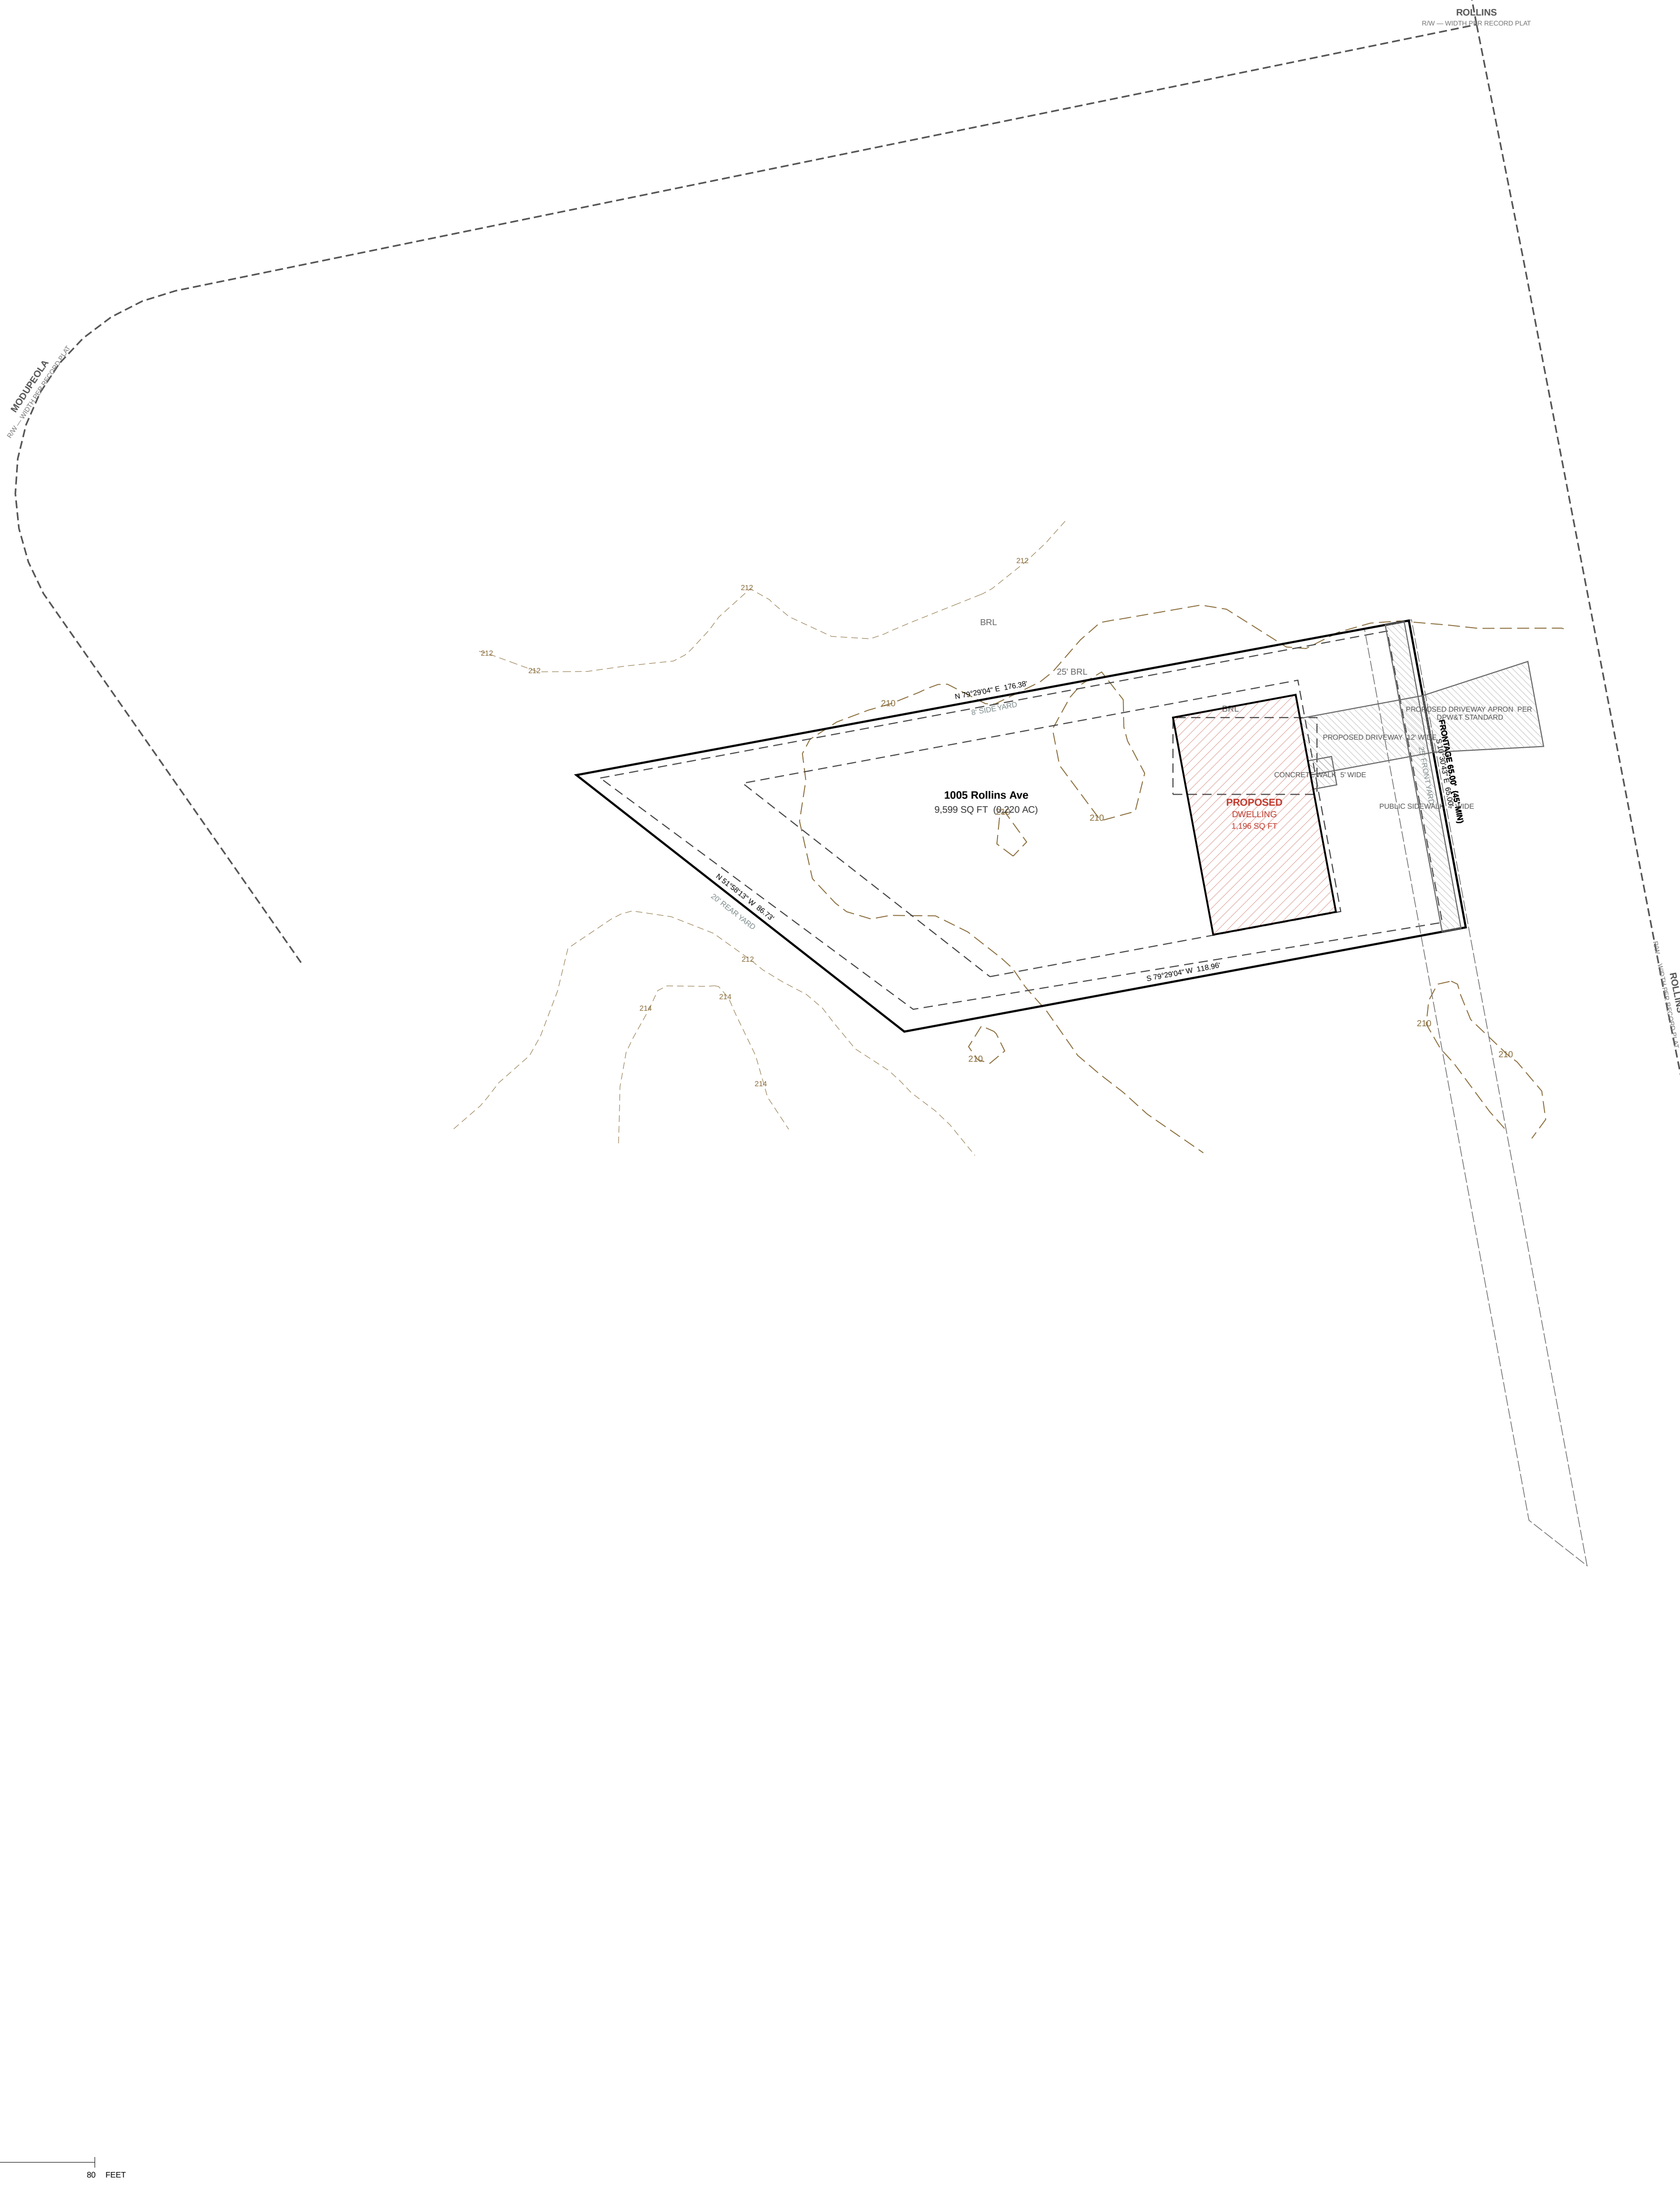

KEALEE

design, build, deliver

PROJECT
1005 Rollins Ave
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-200 — Overall Site and Zoning Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
3 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD
- Porter Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD
- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND
- PROPERTY BOUNDARY
 - BRL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE	DATE
-----------	------


DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS

— NONE —



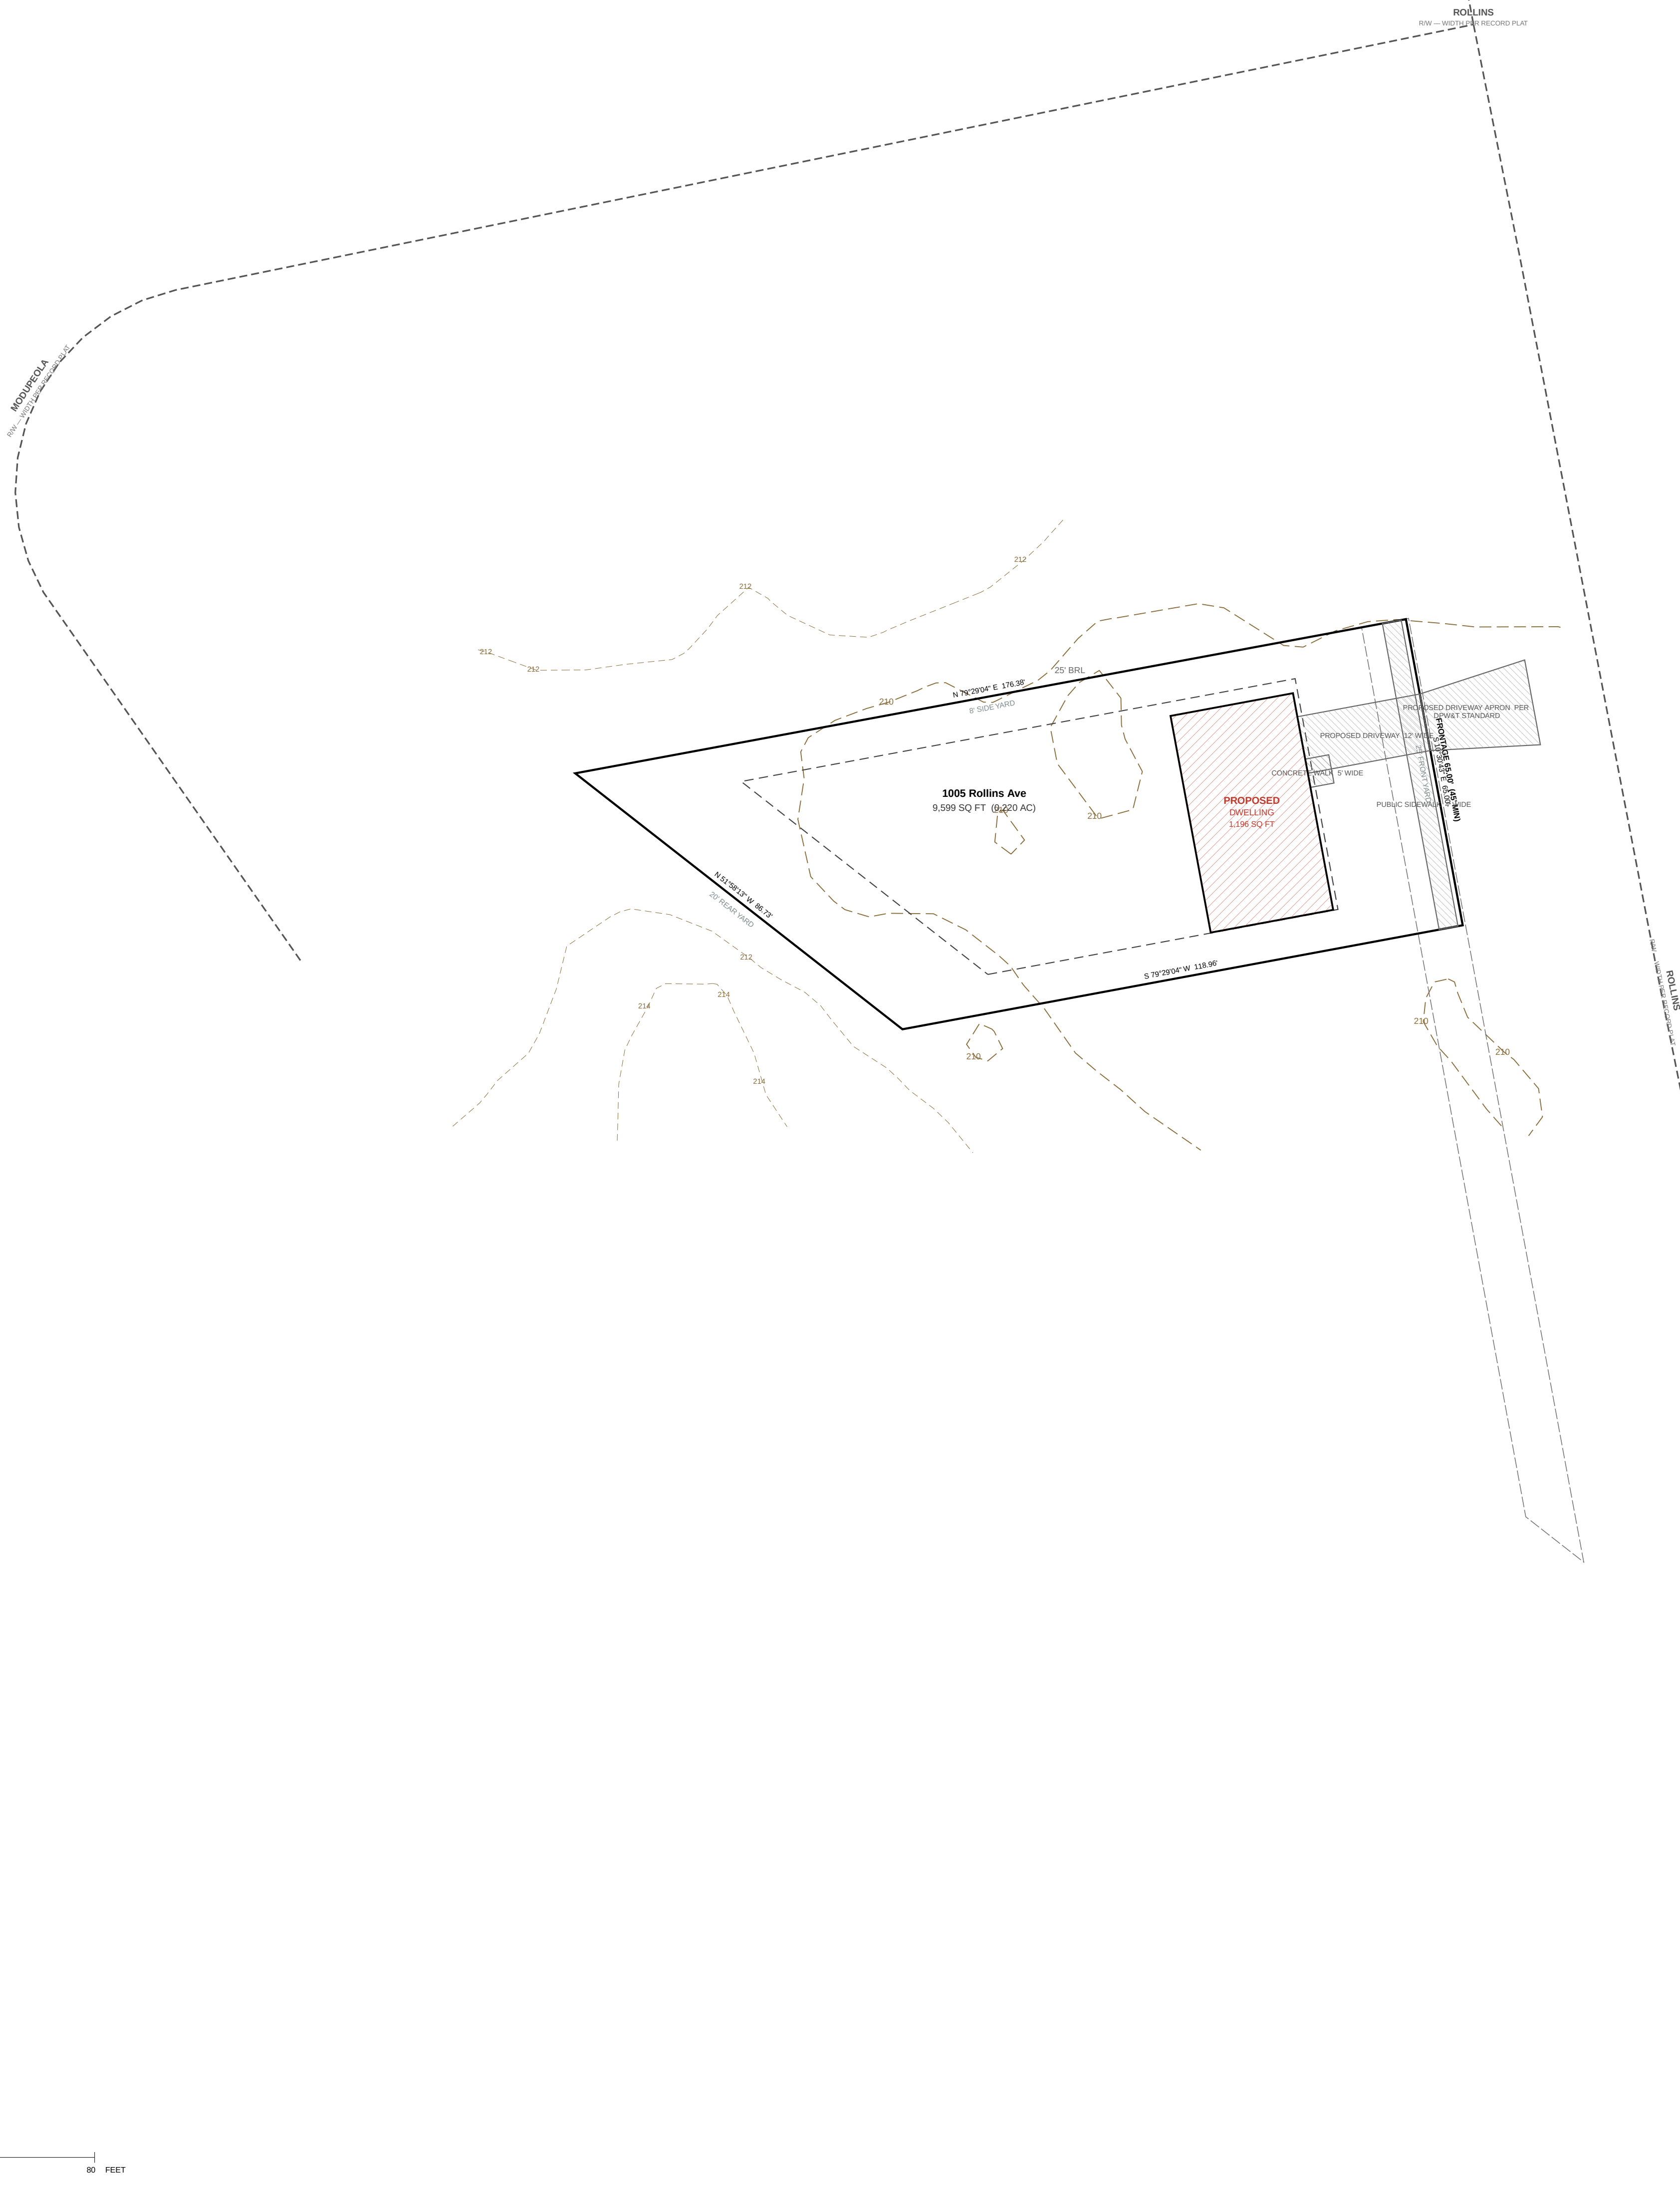

KEALEE

design, build, deliver

PROJECT

1005 Rollins Ave

ADDRESS

1005 Rollins Ave

JURISDICTION

prince georges md

ZONE

RSF-65

SHEET

C-300 — Demolition Plan

SCALE

1" = 20'

STATUS

PRELIMINARY

SHEET NO.

4 OF 11

COORDINATES

EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA

ZONE	RSF-65
TAX / PARCEL ID	1005 Rollins Ave
GROSS LOT AREA	9,599 SF
LOT FRONTAGE	45' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	35% 12.5%
BUILDING FOOTPRINT	— 1,196 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION	12 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD

Porter Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

LEGEND

-----	PROPERTY BOUNDARY
- - - - -	BRL — BUILDING RESTRICTION LINE
—	PROPOSED STRUCTURE
---	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
----	STREET CENTRELINE
----	PROPOSED PAVEMENT — DRIVEWAY / WALK
- - - - -	EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE	DATE
-----------	------

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS

— NONE —



KEALEE

design, build, deliver

PROJECT
1005 Rollins Ave
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
5 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248 NAD83	
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32.106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD

Porter Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9559 SF computed against 9,599 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that monumentation, not in this drawing.

LEGEND

- PROPERTY BOUNDARY
- BRL --- BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR --- PGATLAS 2 FT (2023), NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT --- DRIVEWAY / WALK
- EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

GRADING CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE REQUIREMENTS OF SUBTITLE 32, DIVISION 2 OF THE CODE OF PRINCE GEORGE'S COUNTY WATER RESOURCES PROTECTION AND GRADING CODE AND THAT I OR MY STAFF HAVE INSPECTED THIS SITE AND THAT DRAINAGE FLOWS FROM UPHILL PROPERTIES ONTO THIS SITE, AND FROM THIS SITE ONTO DOWNHILL PROPERTIES, HAVE BEEN ADDRESSED IN SUBSTANTIAL ACCORDANCE WITH APPLICABLE CODES, SIGNED, SEALED AND DATED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF MARYLAND.

Prince George's County CPE, Site Rough Grading Design Review Checklist, Item A-10

STABILIZATION COMPLIANCE PREAMBLE

Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.01 by January 9, 2013, regardless of when an erosion and sediment control plan was approved. COMAR 26.17.01.08(C)(3), Grandfathering of approved plans



STANDARD STABILIZATION NOTE


Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1), and b) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

2013 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01.08A)(3)

REVISIONS

— NONE —

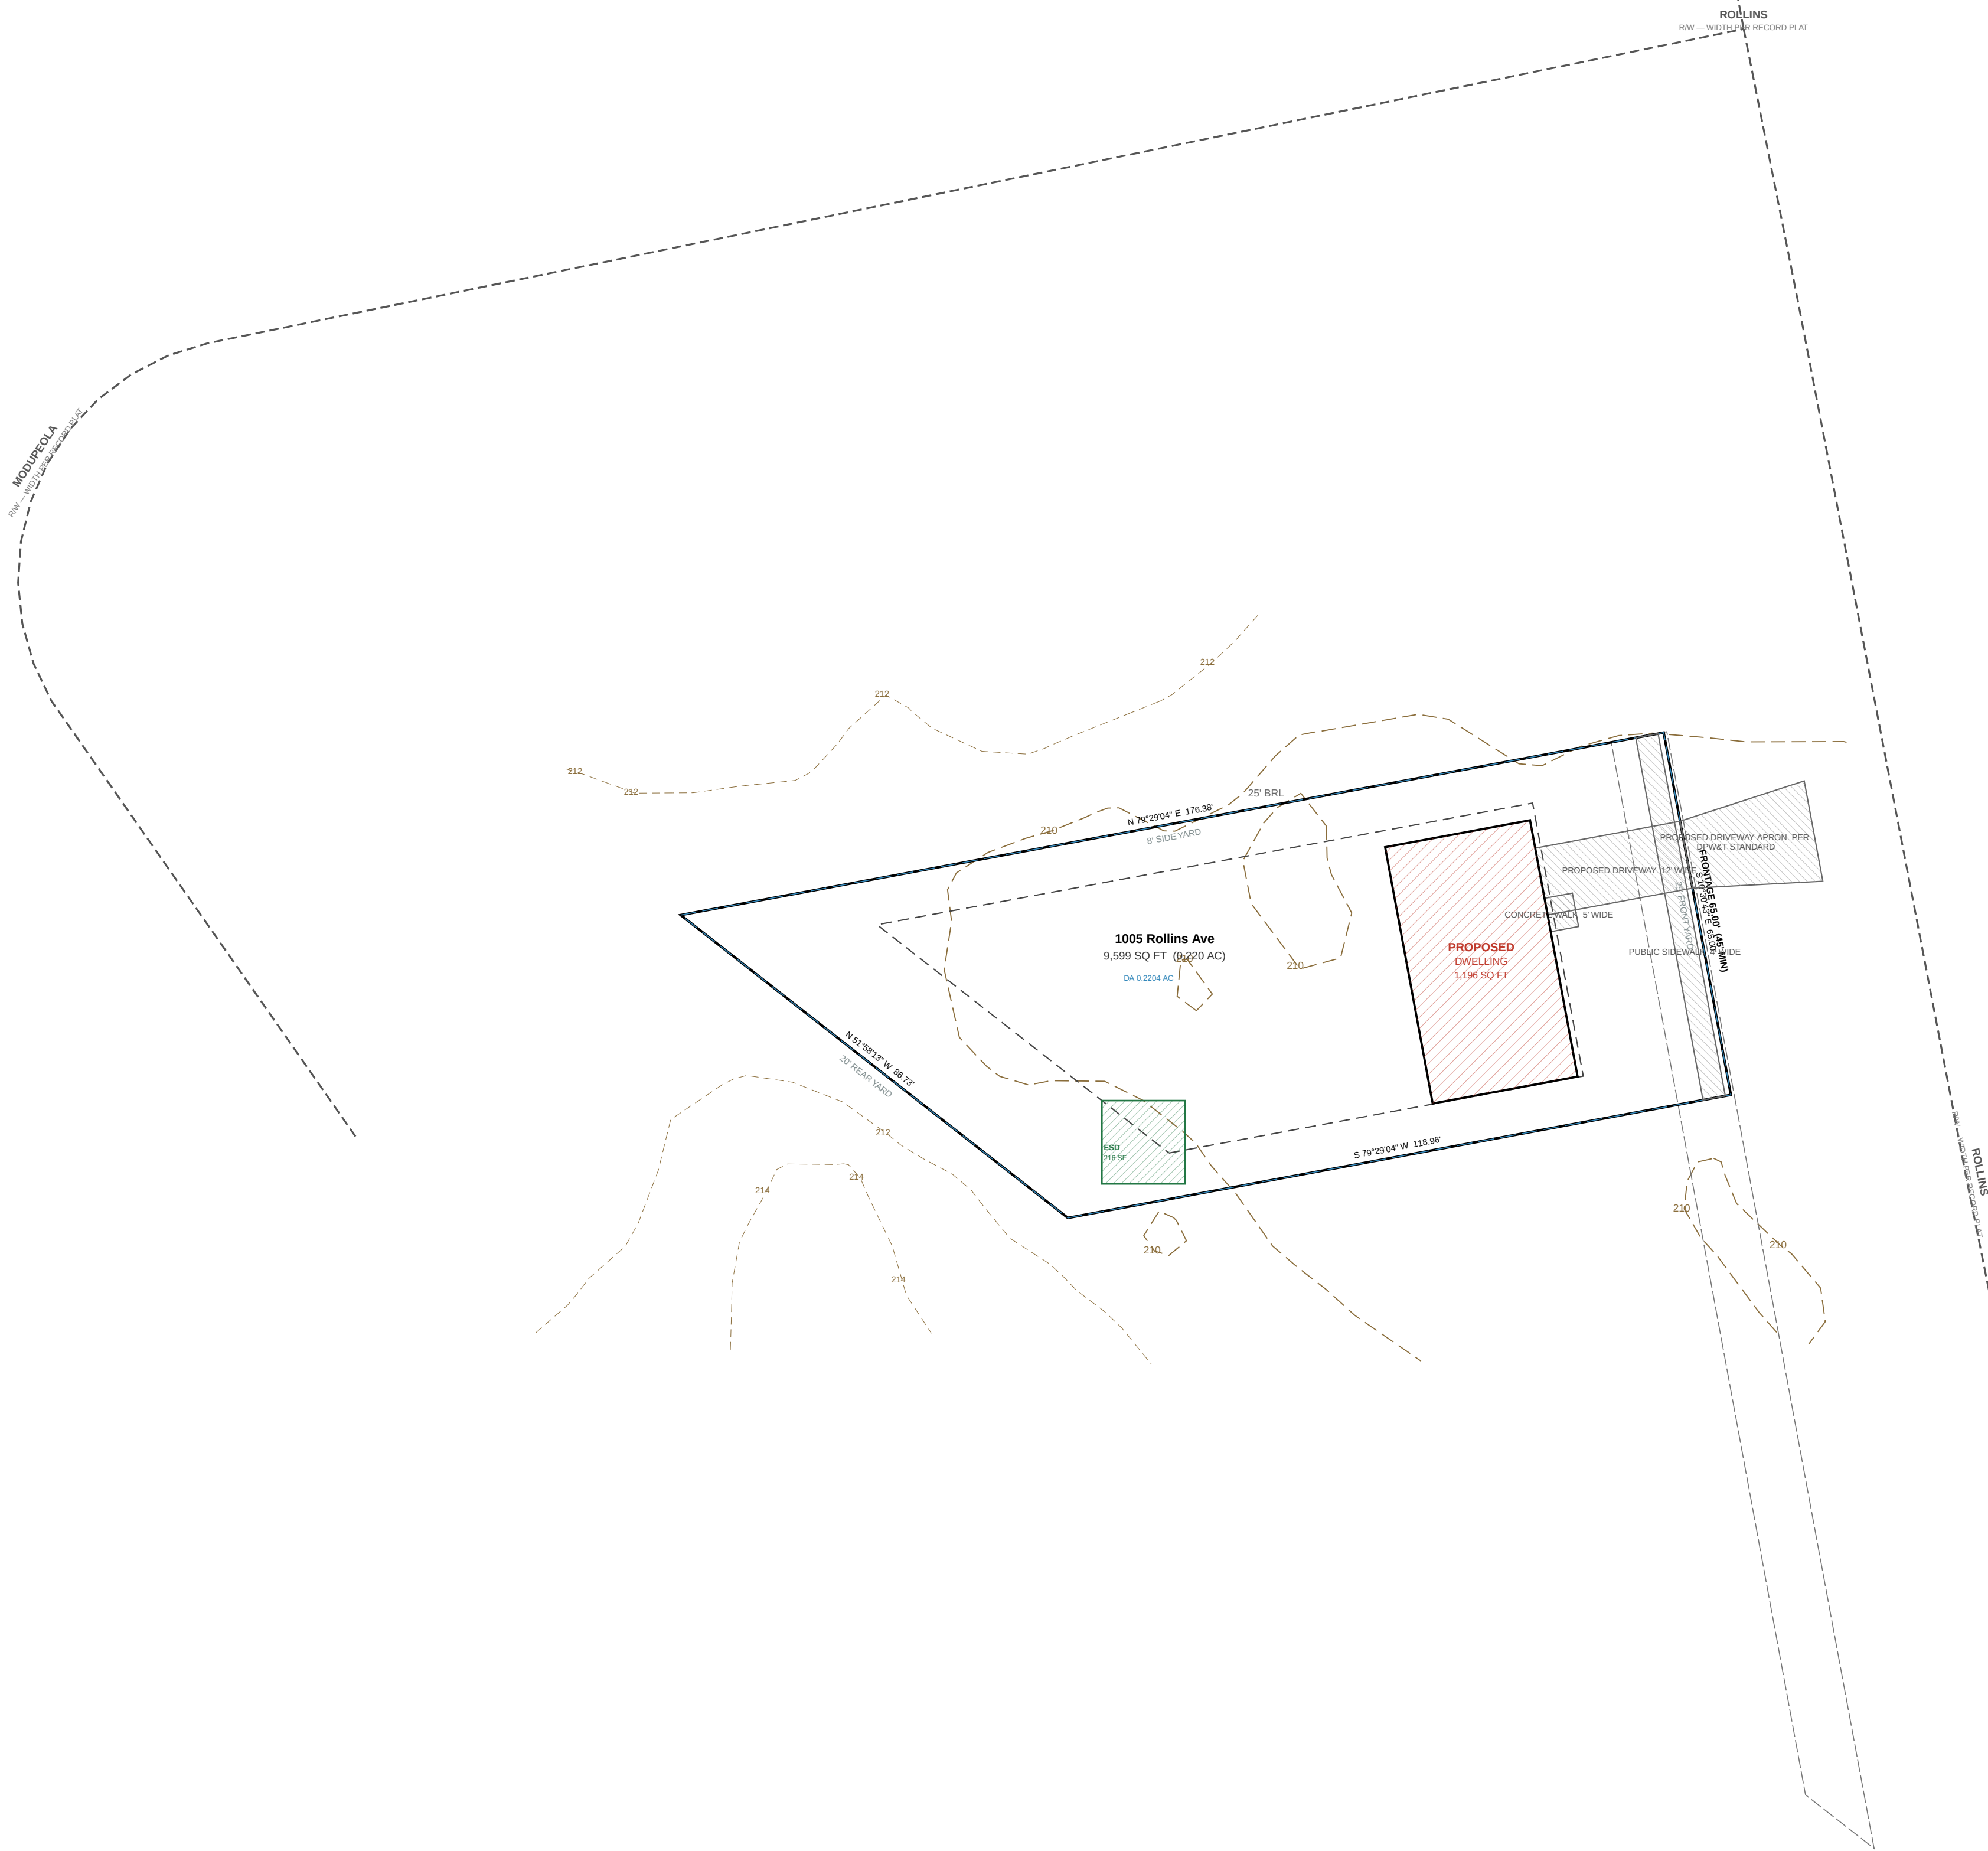

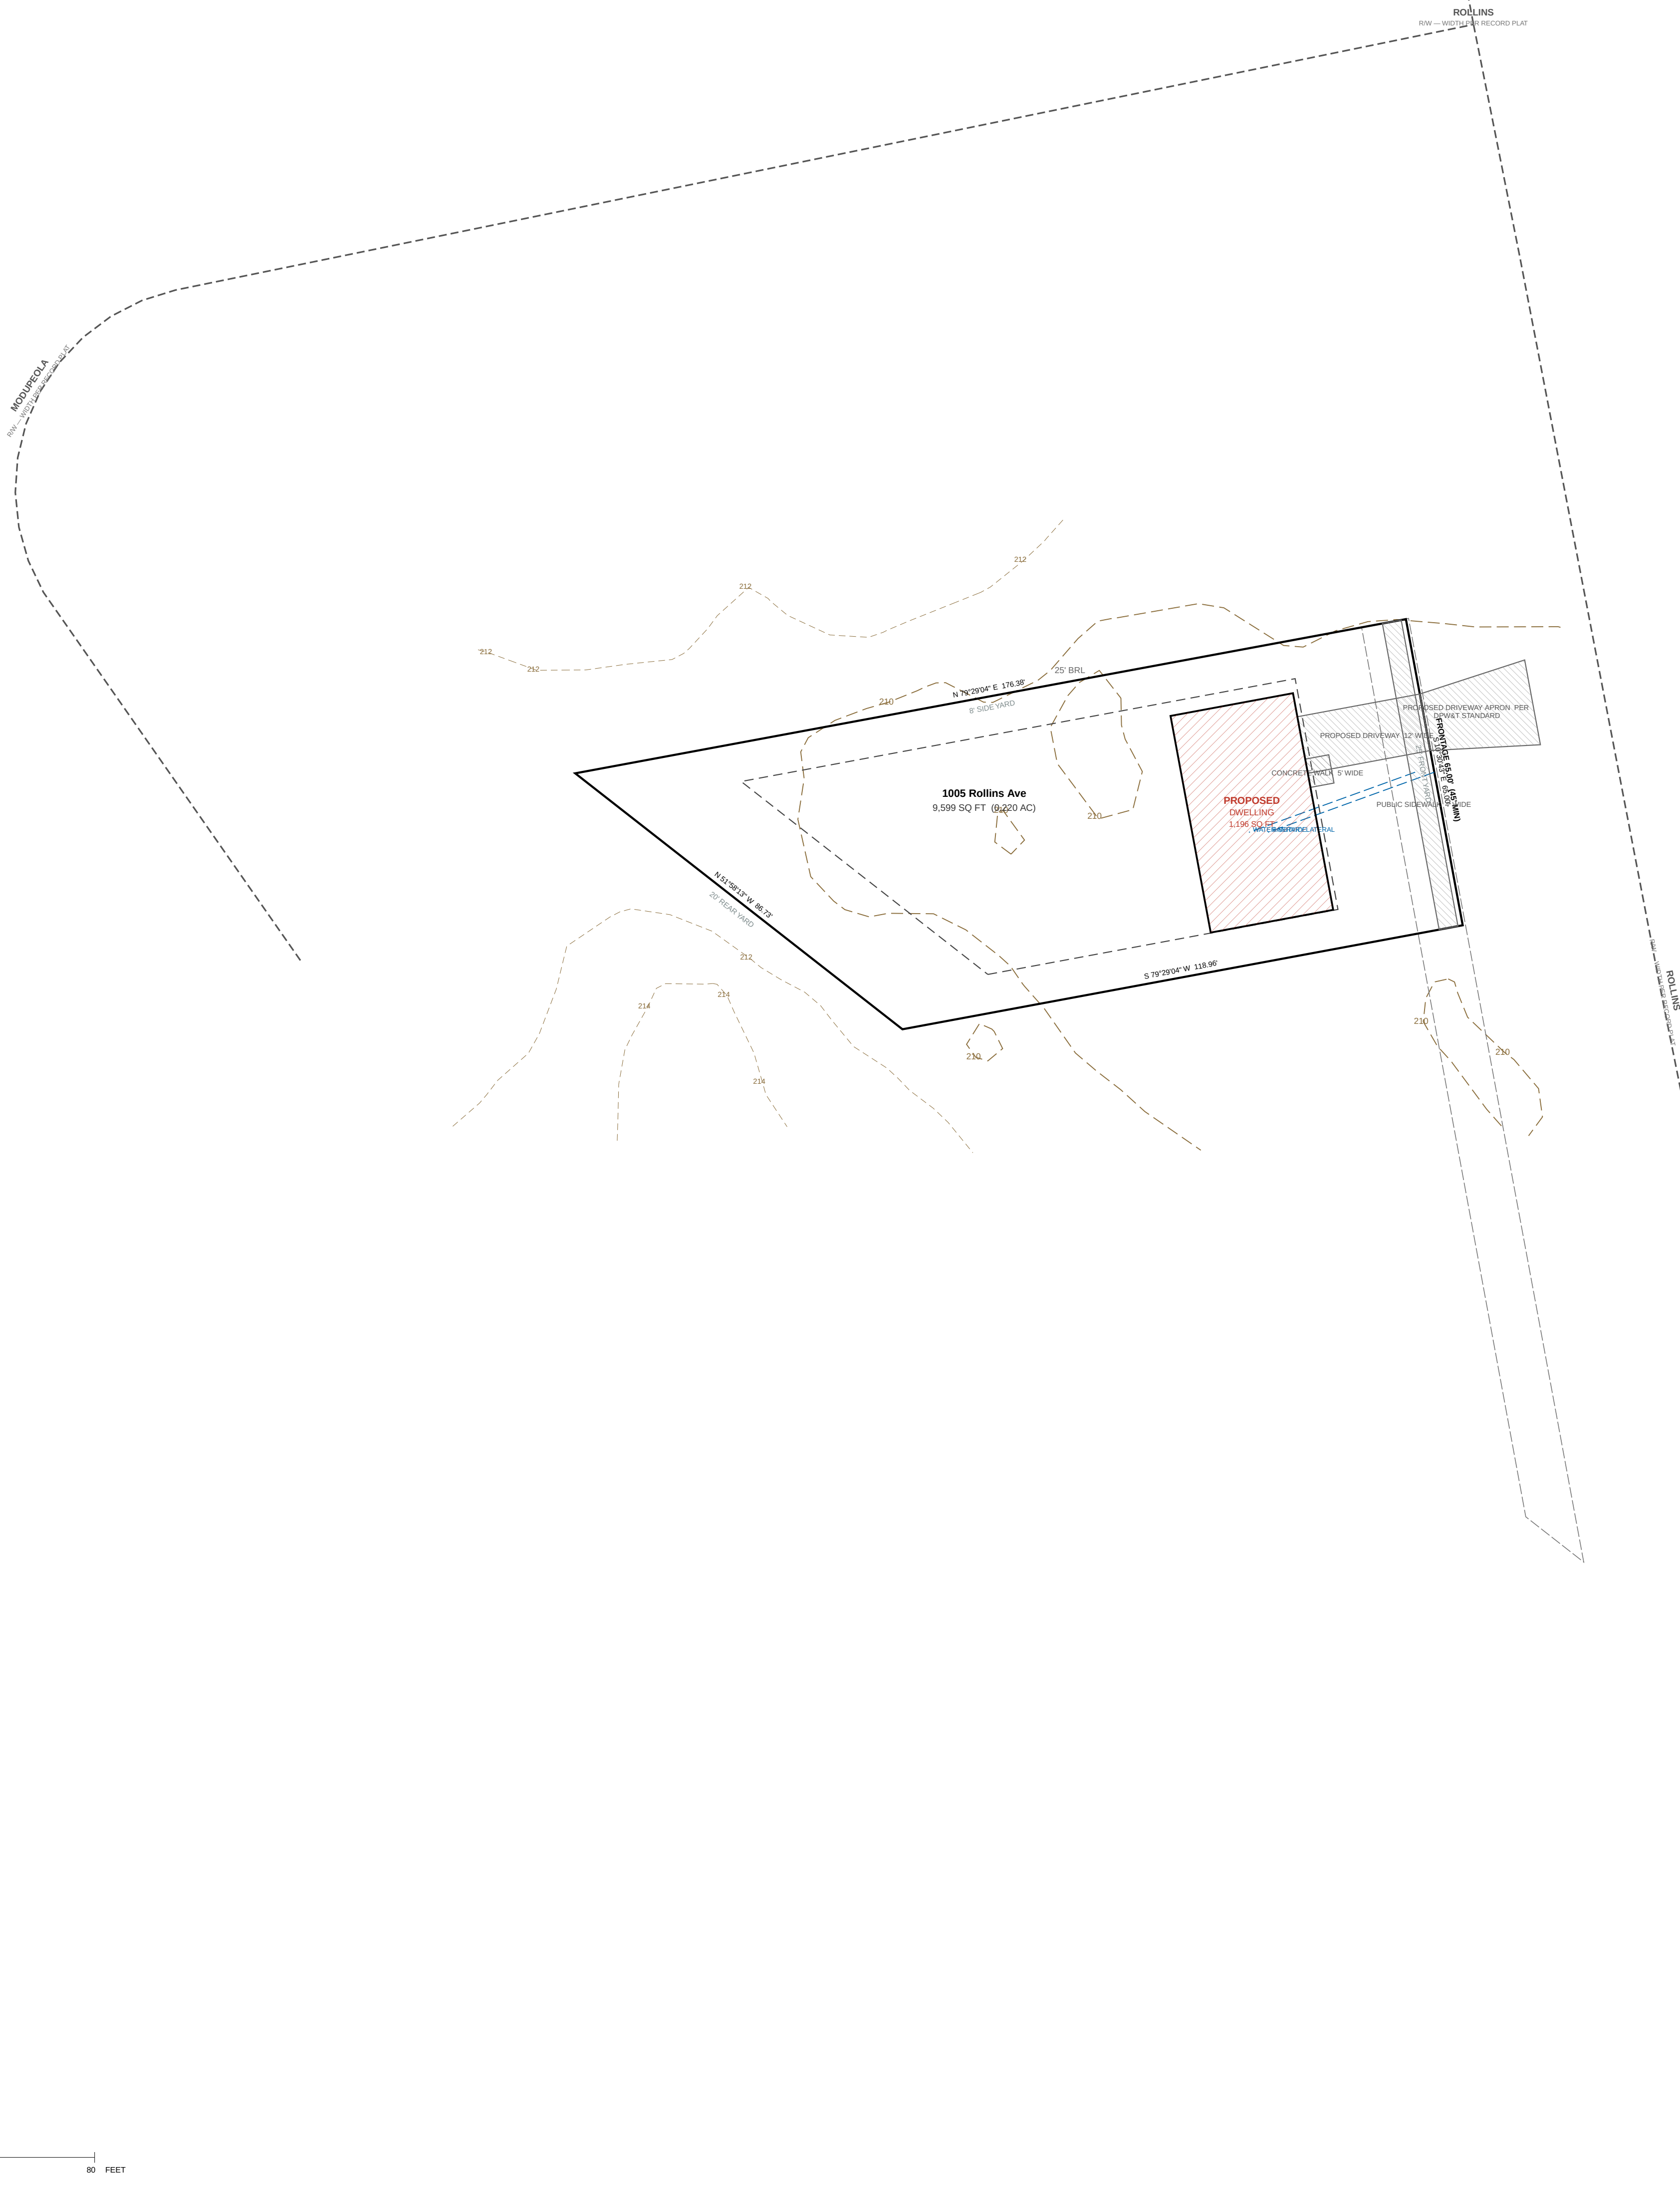

KEALEE

design, build, deliver

PROJECT
1005 Rollins Ave
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-500 — Utility Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
6 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32.106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD
- Porter Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD
- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this drawing.

- LEGEND
- PROPERTY BOUNDARY
 - BRL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGES COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE	DATE
-----------	------


DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS

— NONE —



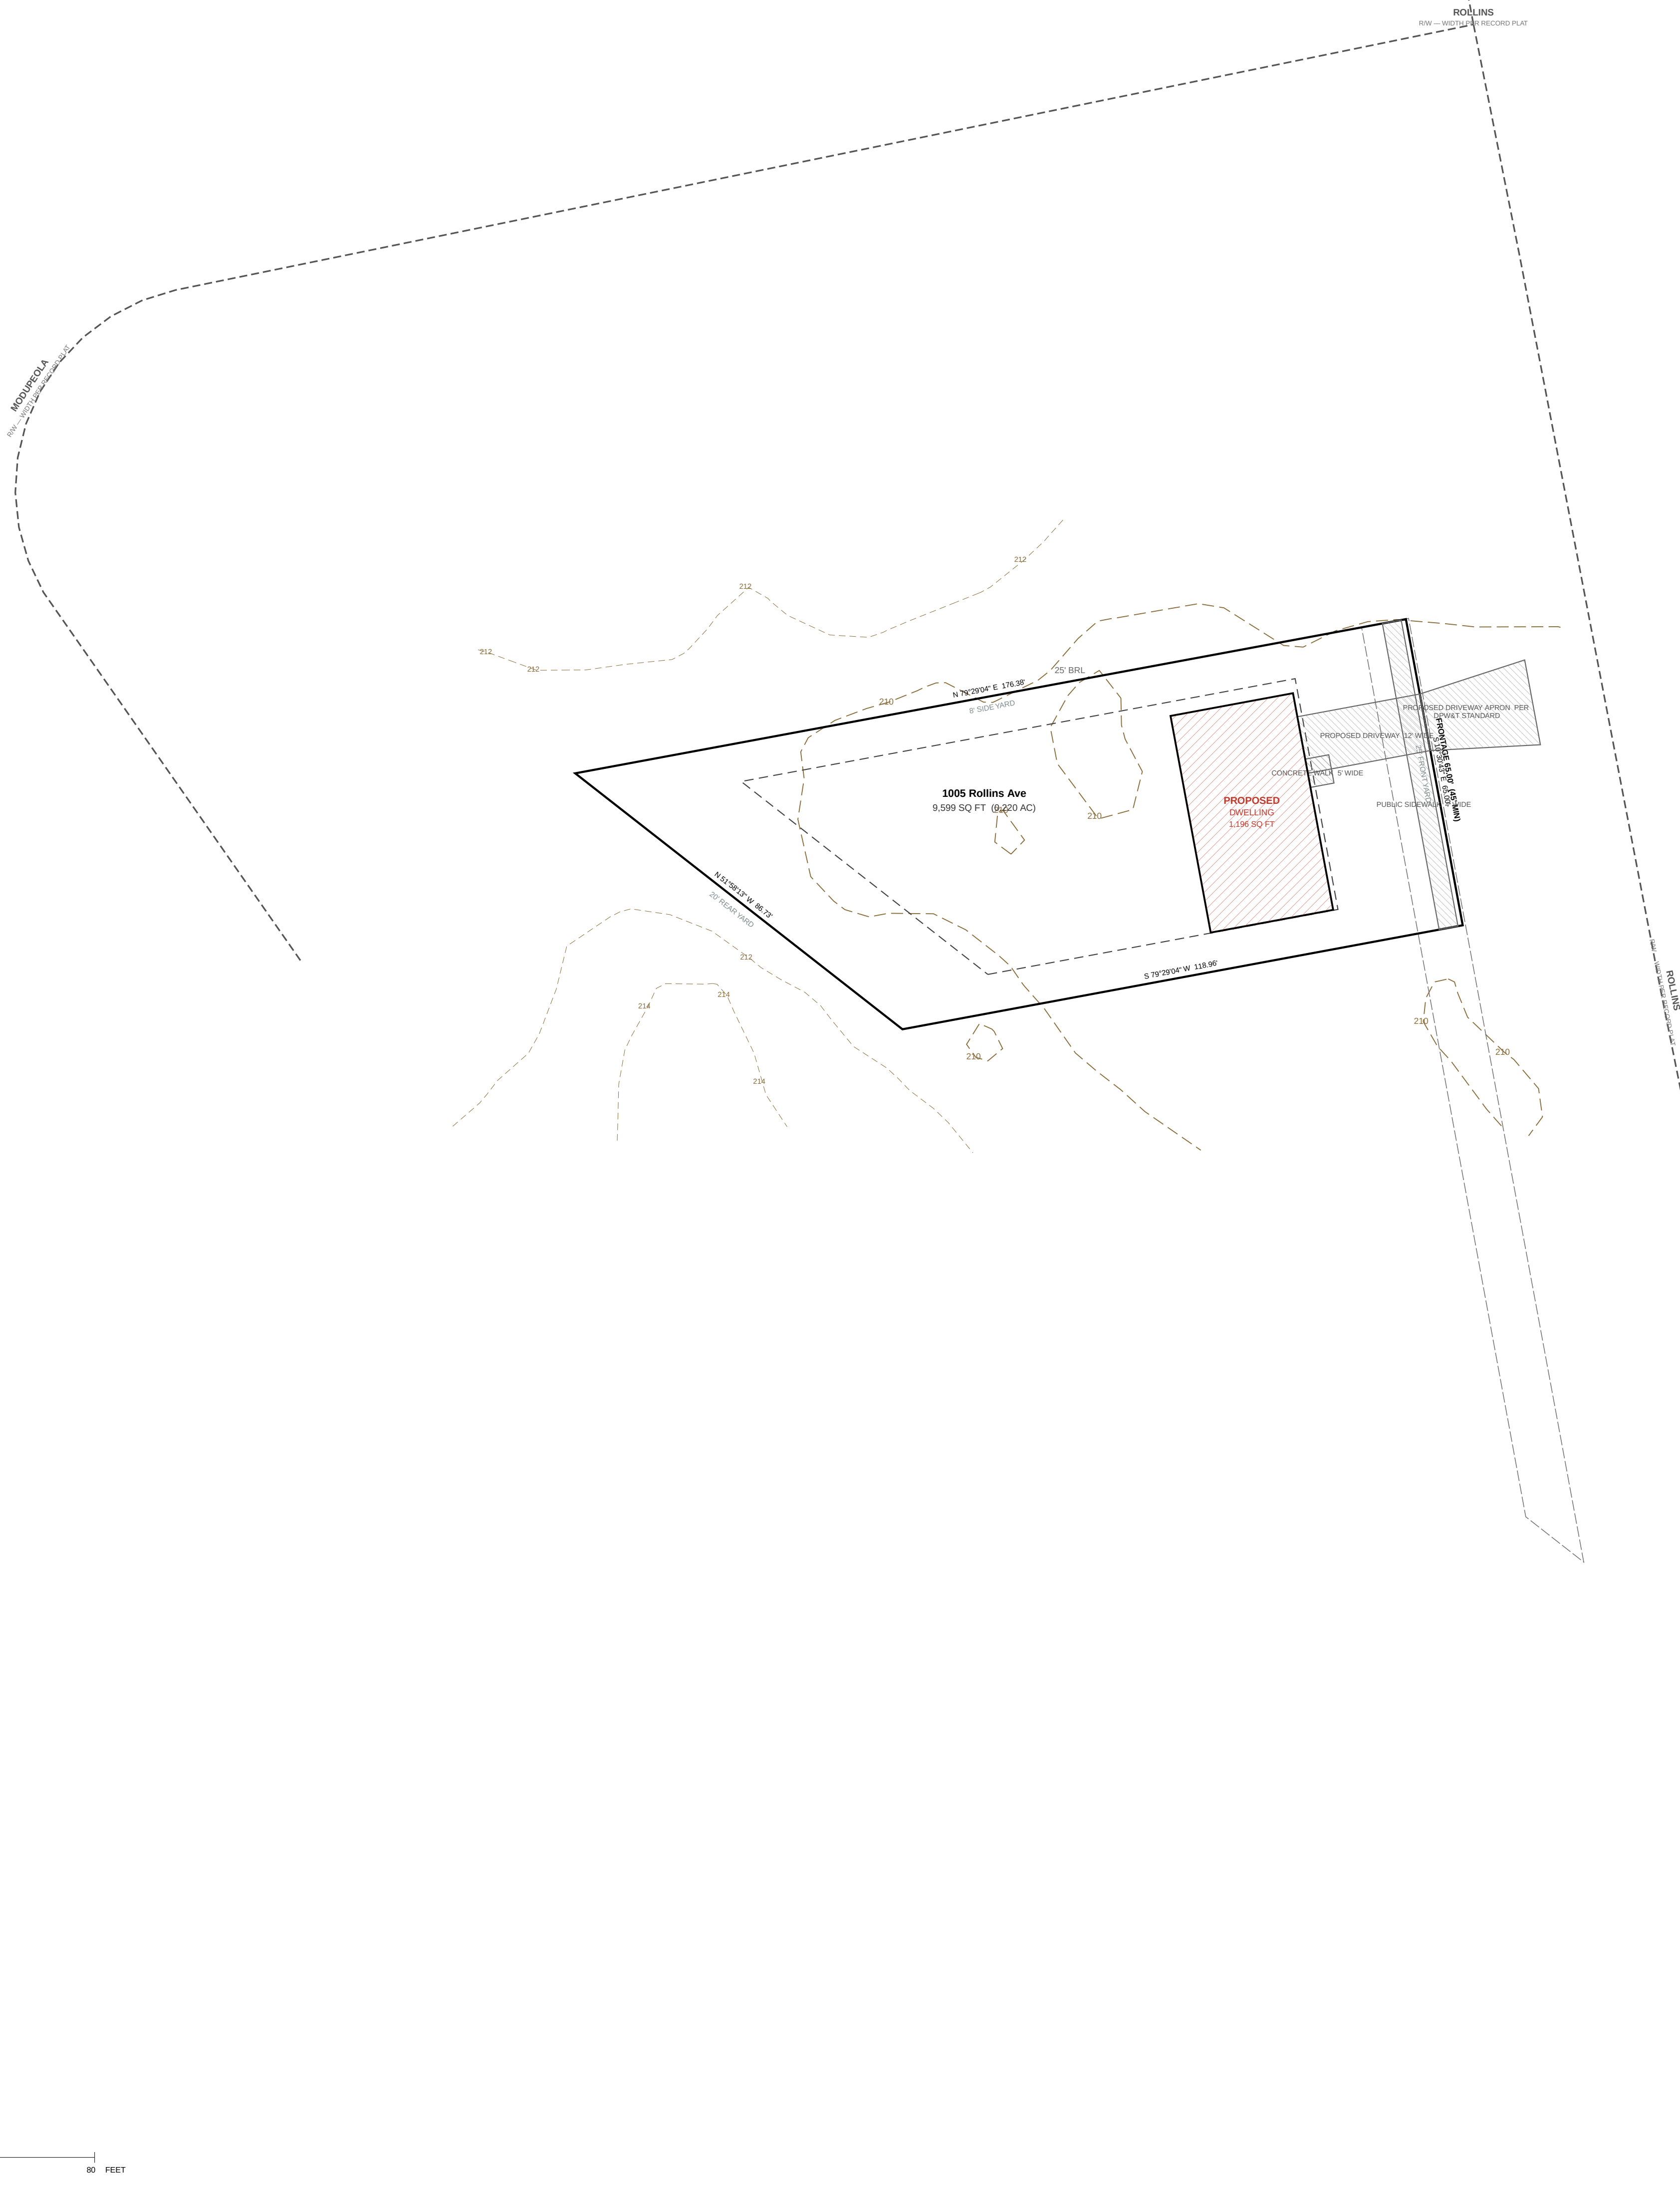

↑
N

KEALEE
design, build, deliver

PROJECT
1005 Rollins Ave
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-600 — Stormwater Management Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
7 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD**
Paper Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD**
- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND**
- PROPERTY BOUNDARY
 - BRL --- BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR --- PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT --- DRIVEWAY / WALK
 - EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —



KEALEE

design, build, deliver

PROJECT
1005 Rollins Ave
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-700 — Sediment and Erosion Control Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
8 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD**
Porter Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD**
- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND**
- PROPERTY BOUNDARY
 - BRL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE	DATE
-----------	------



DPE SITEROAD PLAN REVIEW DIVISION APPROVAL


SIGNATURE	DATE
-----------	------

STABILIZATION COMPLIANCE PREAMBLE
Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.01 by January 9, 2013, regardless of when an erosion and sediment control plan was approved.
COMAR 26.17.01.03(2)(D), Governing body of approved plans.

STANDARD STABILIZATION NOTE
Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 3:1 horizontal to 1:1 vertical (3:1 and 3:1); seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.
2013 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01.03A(2)).

REVISIONS
— NONE —

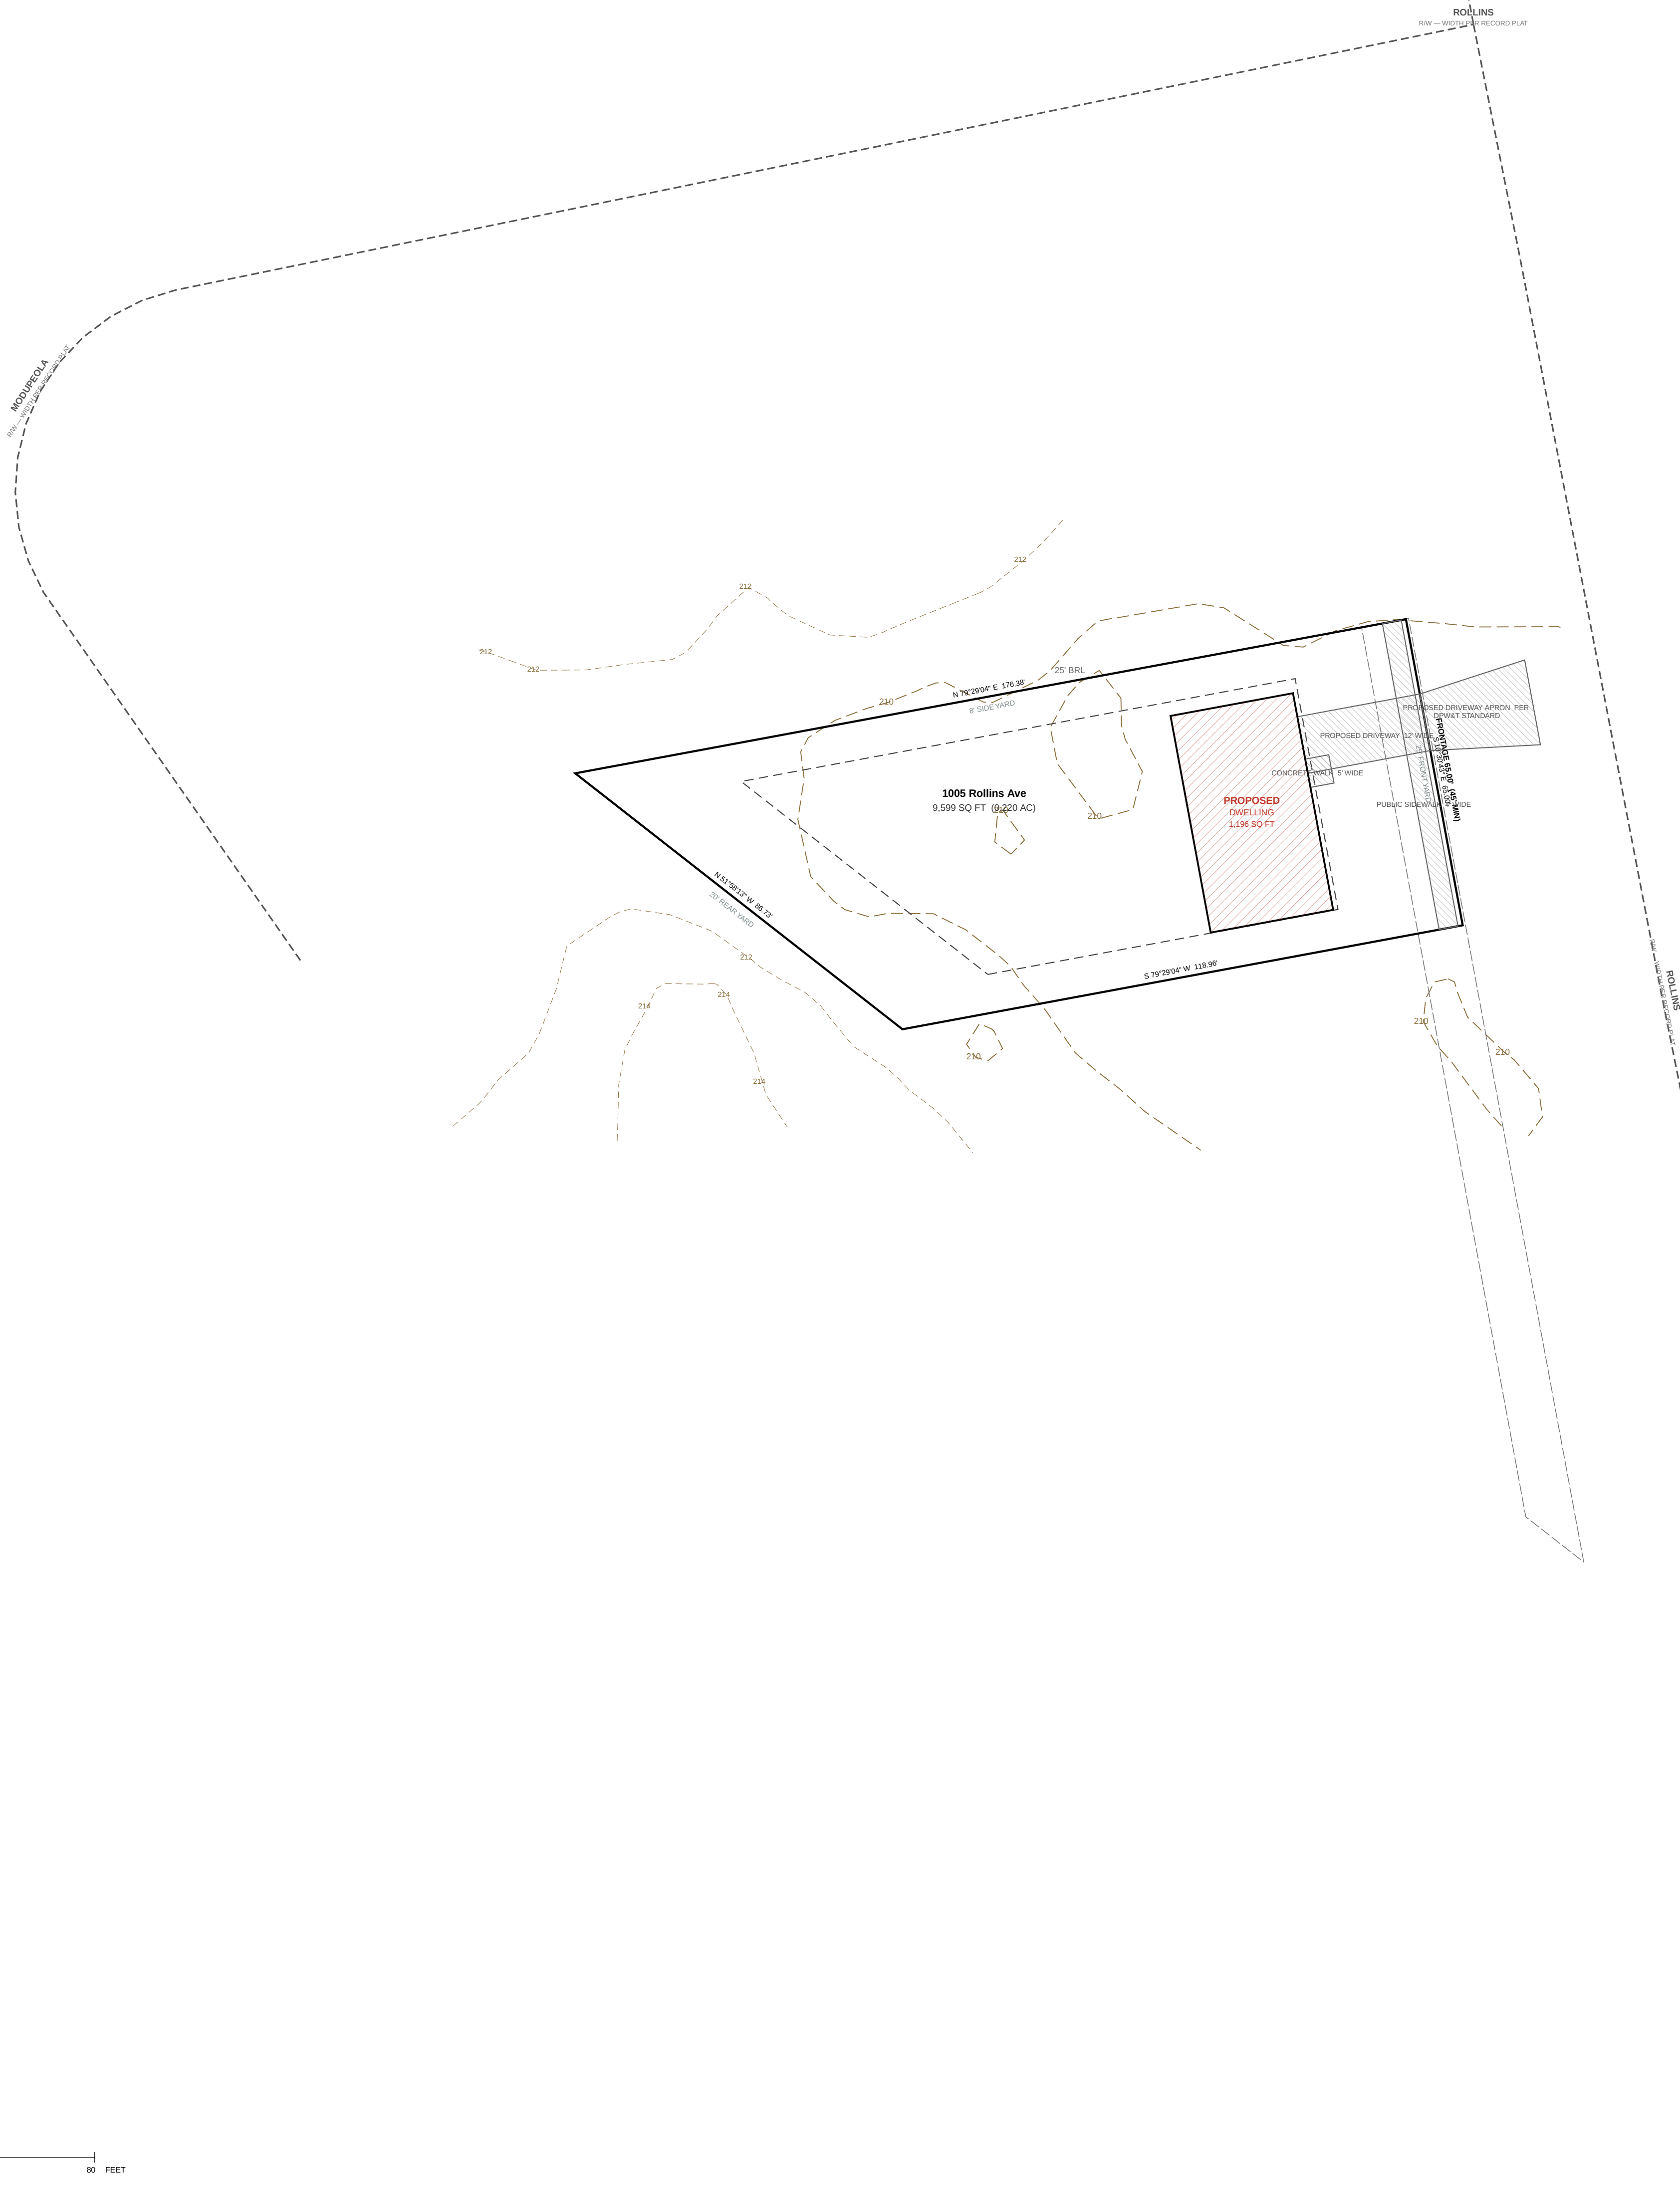

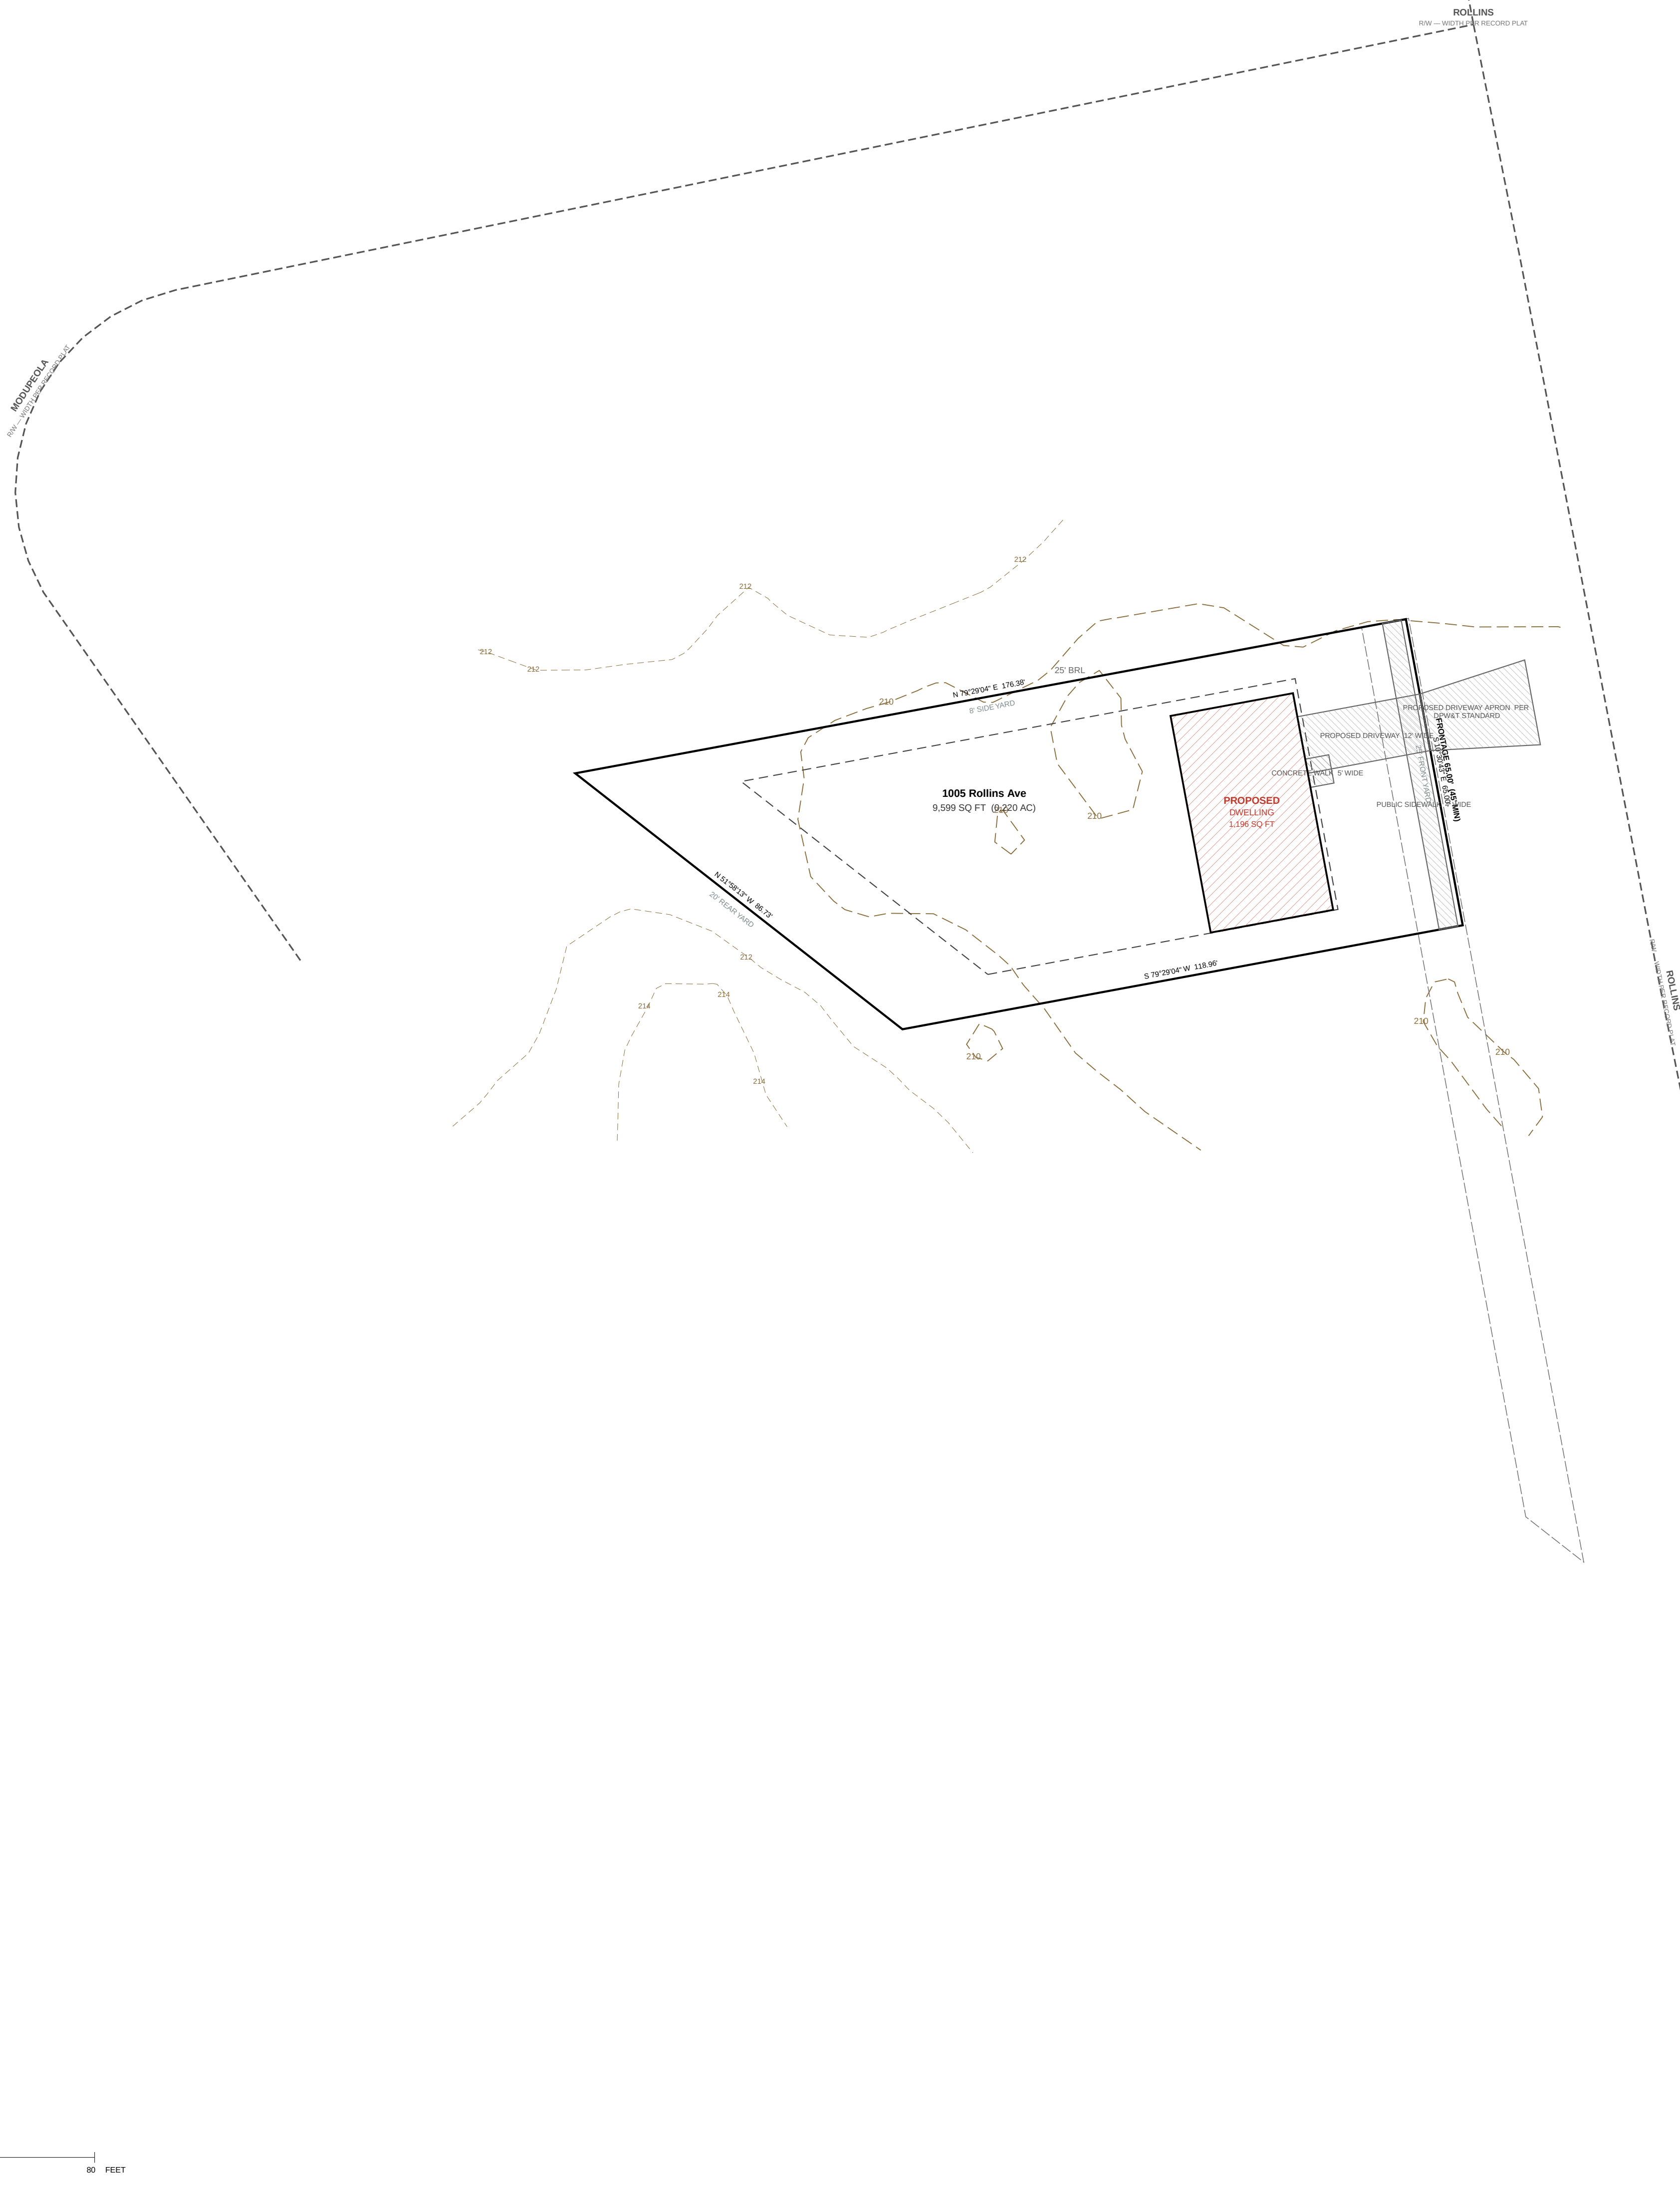

KEALEE

design, build, deliver

PROJECT
1005 Rollins Ave
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-800 — Road, Driveway and Paving Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
9 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD
- Porter Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD
- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND
- PROPERTY BOUNDARY
 - BRL --- BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR --- PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT --- DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGES COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE	DATE
-----------	------


DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS

— NONE —



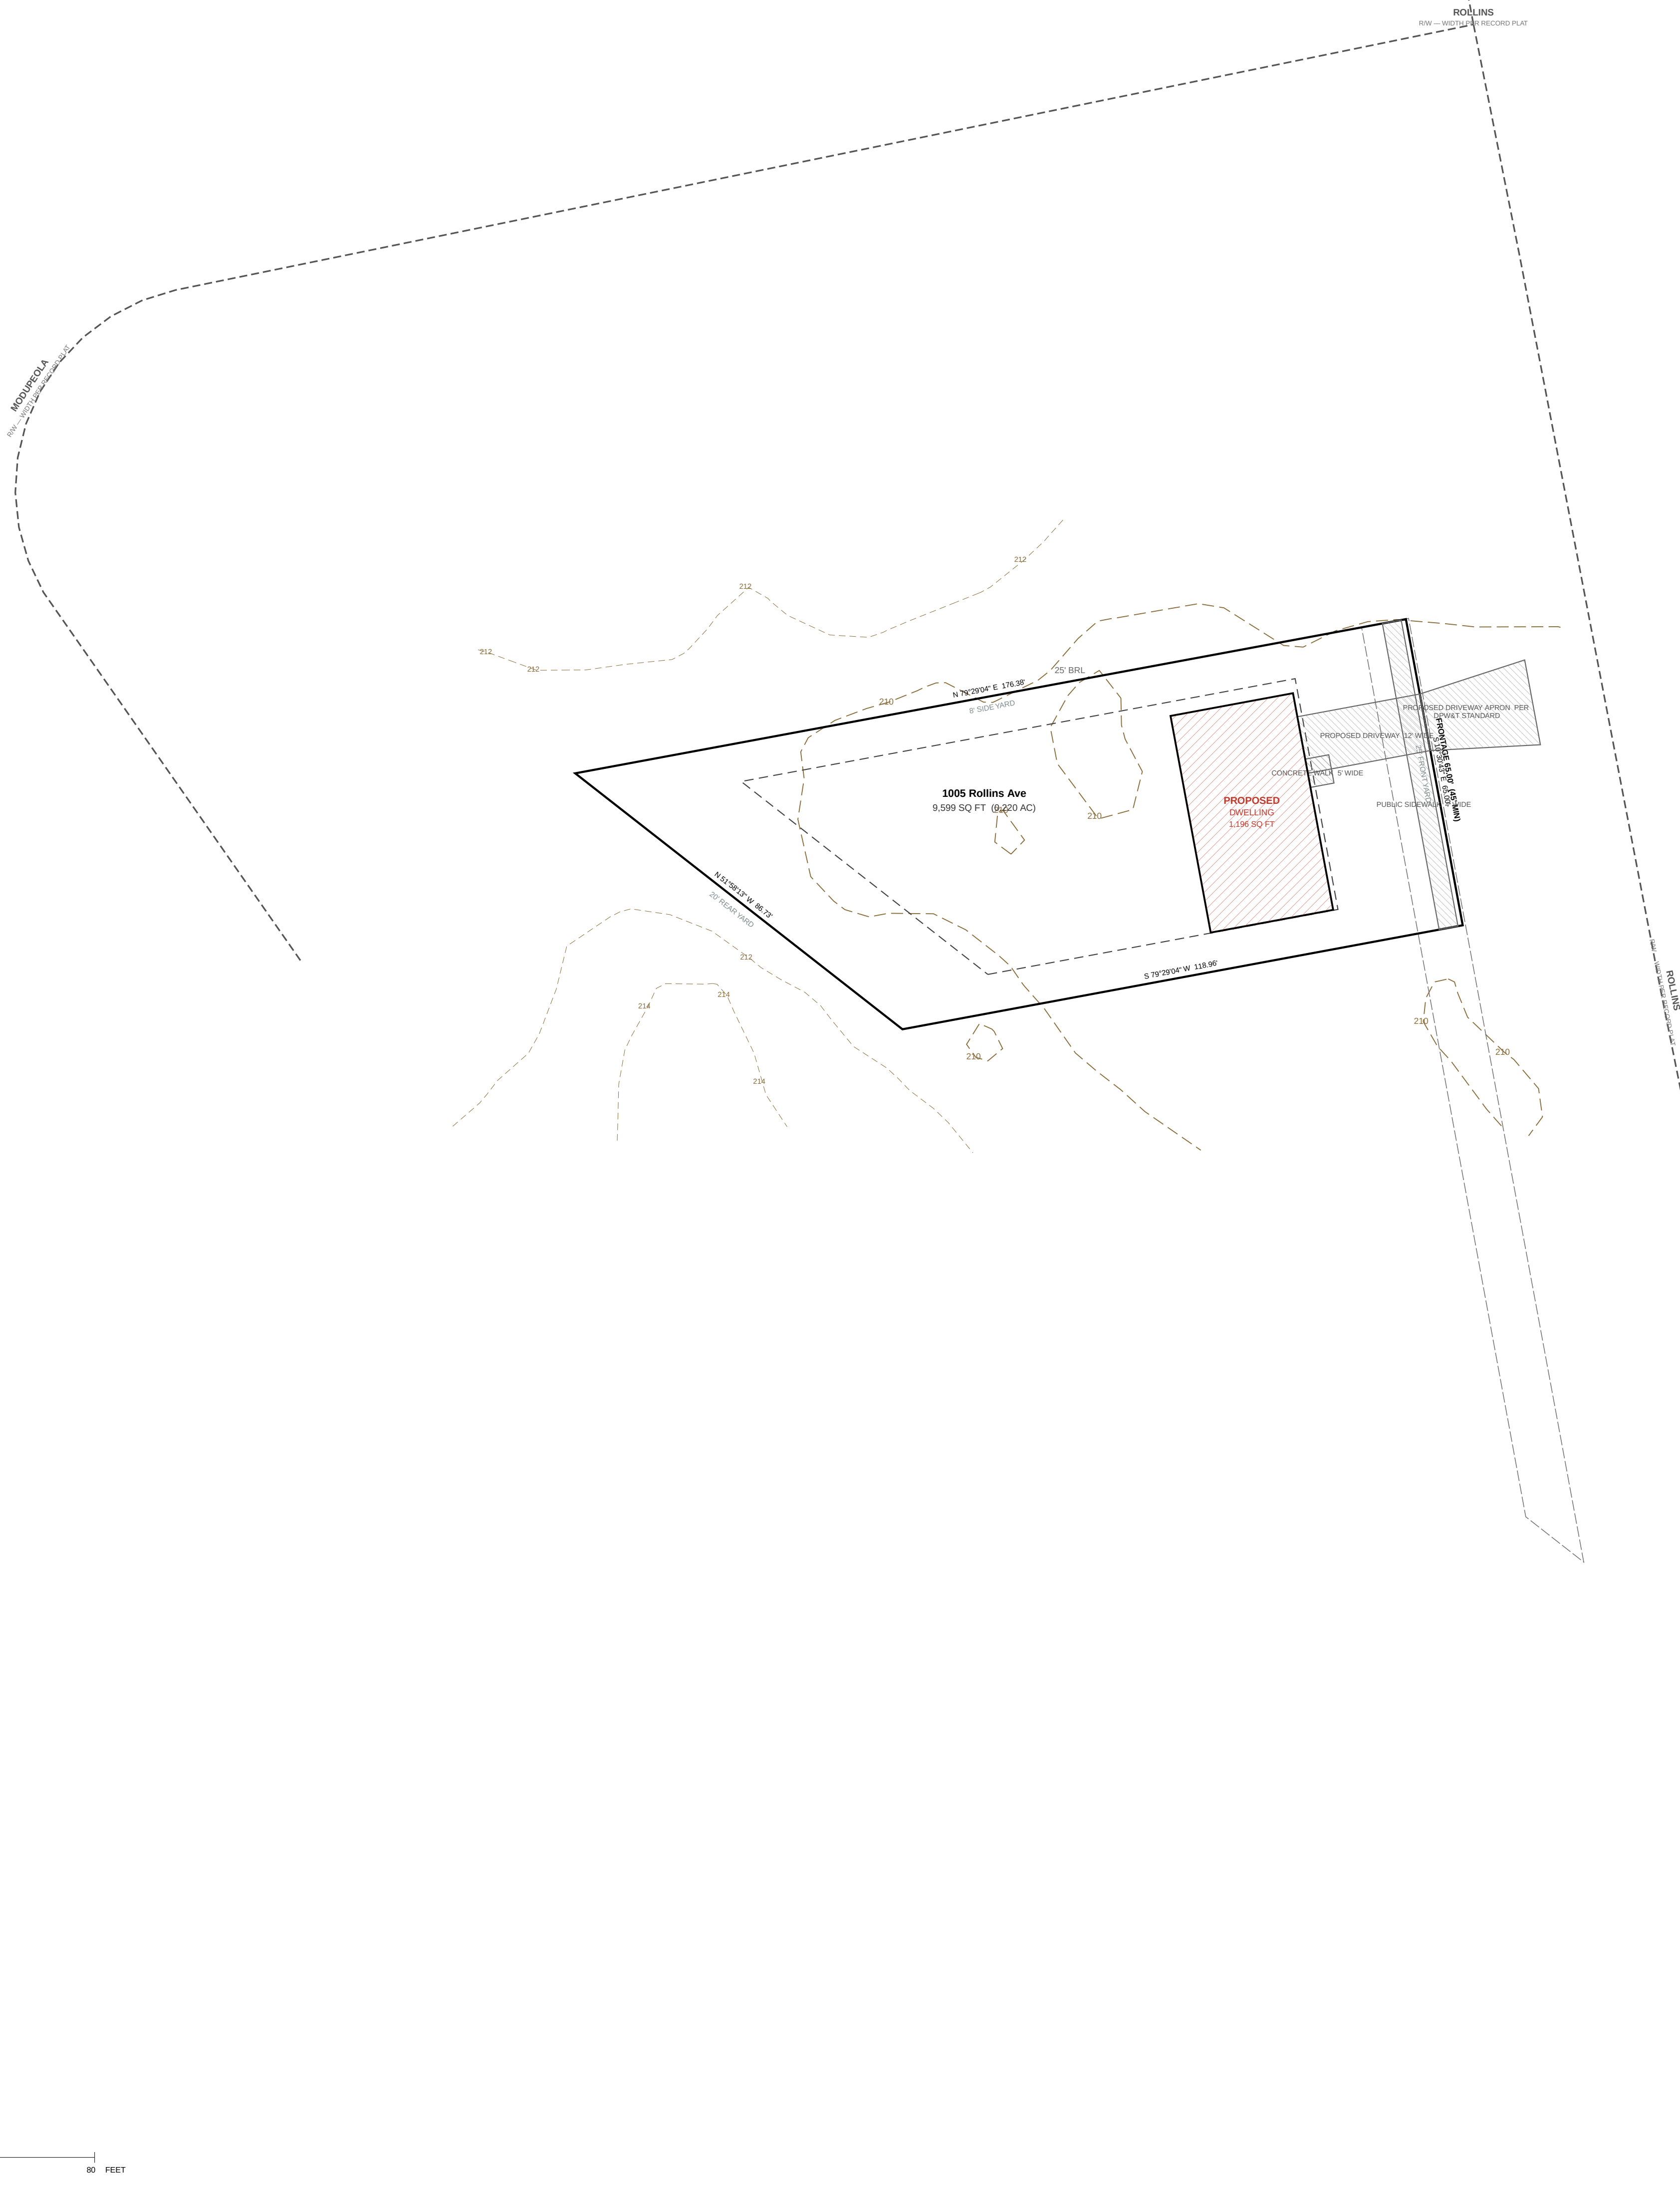

↑
N

KEALEE
design, build, deliver

PROJECT
1005 Rollins Ave

ADDRESS
1005 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-900 — Civil Details

SCALE
1" = 20'

STATUS
PRELIMINARY

SHEET NO.
10 OF 11

COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1005 Rollins Ave	
GROSS LOT AREA	9,599 SF	0.220 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
Paper Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND**
- PROPERTY BOUNDARY
 - BRL --- BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR --- PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT --- DRIVEWAY / WALK
 - EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE	DATE
-----------	------

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —



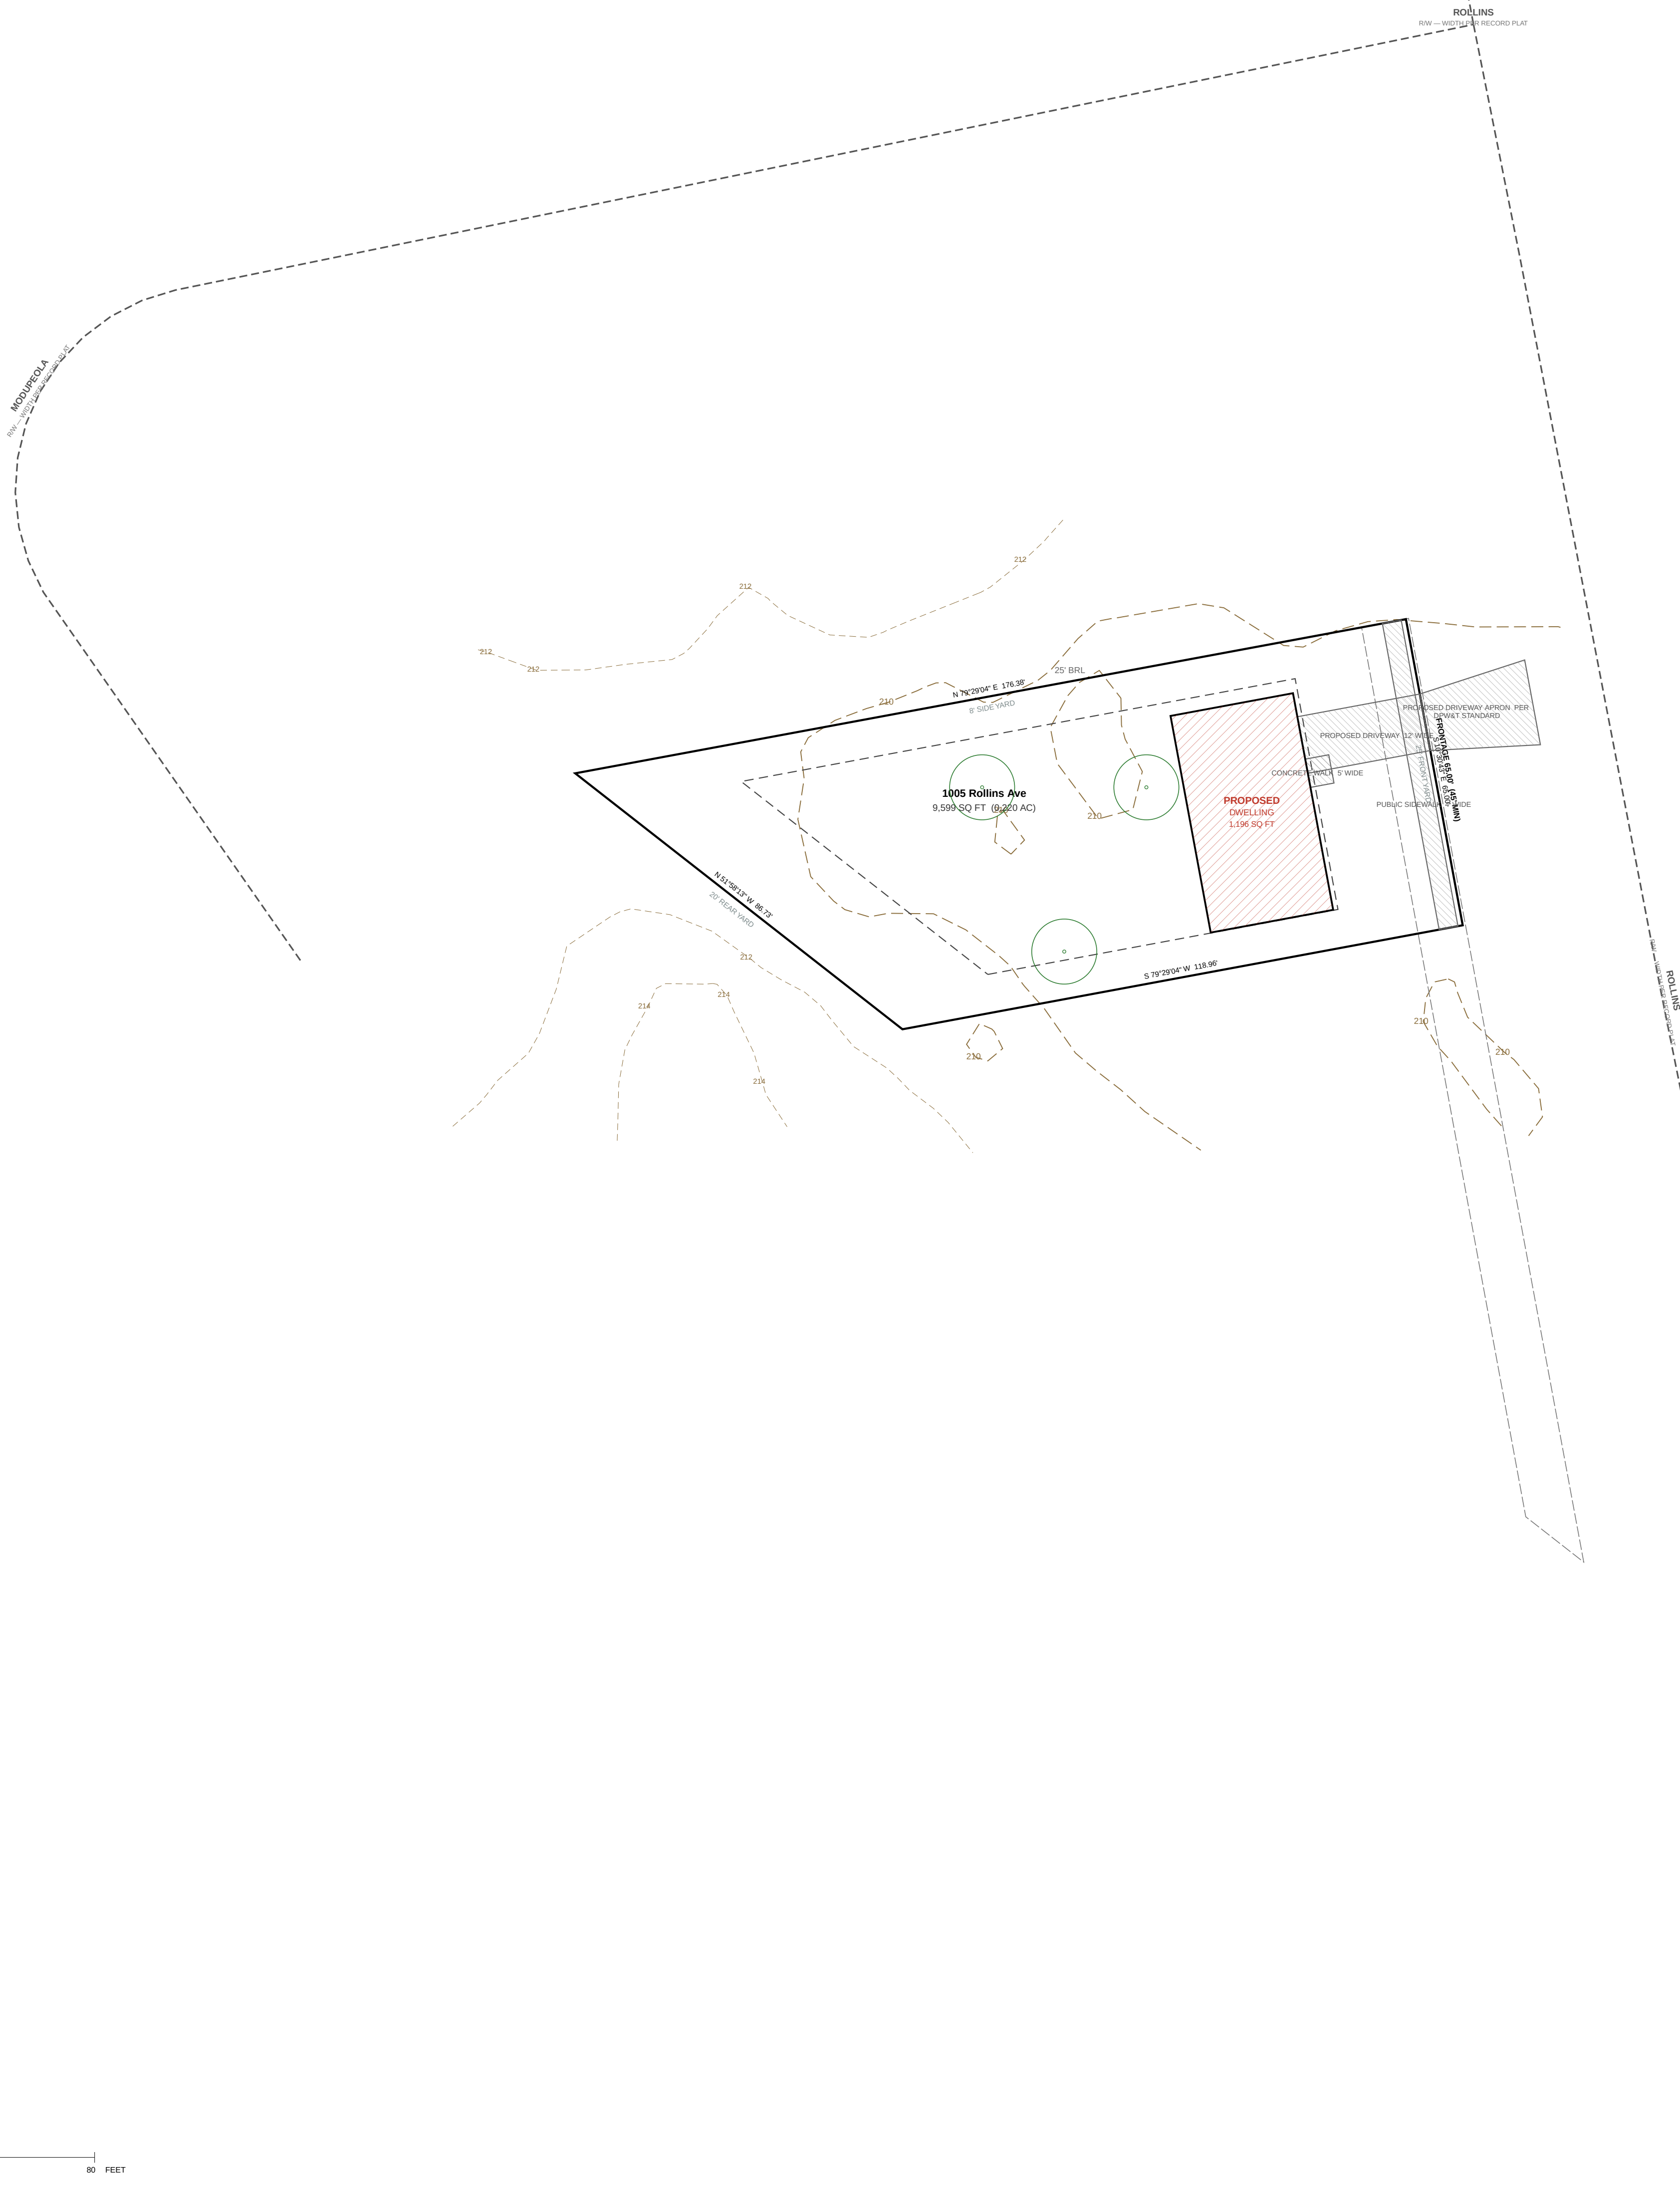

KEALEE
design, build, deliver

PROJECT
1005 Rollins Ave
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
11 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA			
ZONE	RSF-65		
TAX / PARCEL ID	1005 Rollins Ave		
GROSS LOT AREA	9,599 SF	0.220 AC	
LOT FRONTAGE	45' MIN	65.00'	
SETBACKS	REQUIRED	PROVIDED	
FRONT YARD	25'	25'	
SIDE YARD	8'	8'	
REAR YARD	20'	20'	
COVERAGE	MAX	PROPOSED	
LOT COVERAGE	35%	12.5%	
BUILDING FOOTPRINT	—	1,196 SF	
DATUM			
HORIZONTAL	EPSG:2248	NAD83	
VERTICAL	NAVD83 (feet)		

SITE ANALYSIS	
1. Gross tract area	9,599 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,599 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
Purser Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASIS OF RECORDING: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.84327', 9599 SF computed against 9,599 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this drawing.

- LEGEND**
- PROPERTY BOUNDARY
 - BR — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

