

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-000 — Cover Sheet, Approvals and General Notes
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
1 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-constructed meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland. To Map 73, GFE #3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rewrite), Scale 1" = 20', November 2007 M. NSPC Record File S-22632, Block of bearings Maryland State Plane Coordinate System (NAD 83). Lot 1 = 9,599 sq ft (0.2203 ac); Lot 2 = 8,008 sq ft (0.1838 ac); 4,219 sq ft (0.0969 ac) dedicated to public use.

- NOTES OF RECORD
- Development of the property shall be in accordance with the approved Stormwater Management Control Plan 4-220-2006-00, or any approved revision thereto.
 - Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
 - The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design, constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.

PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only

The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they apply to the instrument, not to this drawing.

LEGEND

- PROPERTY BOUNDARY
- SBL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ARID, CLAY, SLOPE, DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —

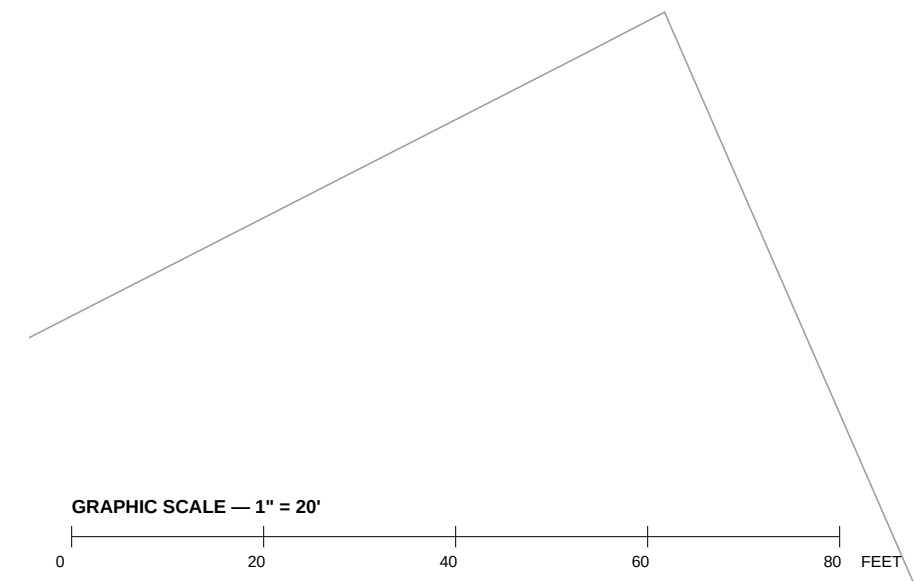

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
2 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-constructed meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland. Tax Map T3, G16 R3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rework), Scale 1" = 20', November 2007 M. NSPC Record File S-2023, Block of bearings Maryland State Plane Coordinate System (NAD 83). Lot 1 = 9,599 sq ft (0.2203 ac); Lot 2 = 8,008 sq ft (0.1838 ac); 4,219 sq ft (0.0969 ac) dedicated to public use.

NOTES OF RECORD
1. Development of the property shall be in accordance with the approved Stormwater Management Control Plan (12/20/2006-05, or any approved revision thereafter).
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
3. The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design, constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.
PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they appear to be true and correct, not to this drawing.

LEGEND	
-----	PROPERTY BOUNDARY
-----	SBL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ANNUAL, SPRING, SOILS DRAWING

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —

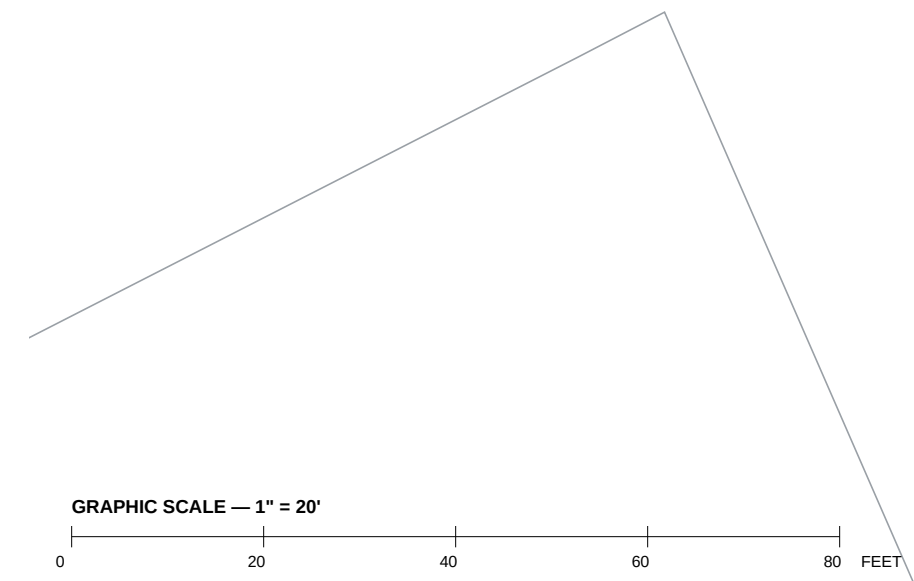

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-200 — Overall Site and Zoning Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
3 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID		
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland, Tax Map T3, G16 R3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rewrite), Scale 1" = 20', November 2007 M; NSPC Record Plat S-20232, Block of bearings Maryland State Plane Coordinate System (NAD 83), Lot 1 = 9,599 sq ft (0.2203 ac), Lot 2 = 8,008 sq ft (0.1838 ac), 4,219 sq ft (0.0969 ac) dedicated to public use.

NOTES OF RECORD
1. Development of the property shall be in accordance with the approved Stormwater Management Control Plan 4-220-2006-00, or any approved revision thereto.
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
3. The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.
PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the instrument, not to this drawing.


LEGEND	
-----	PROPERTY BOUNDARY
-----	SRL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ARID CLIMATE, CHANGING, SOILS, DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL	
SIGNATURE	DATE

REVISIONS
— NONE —

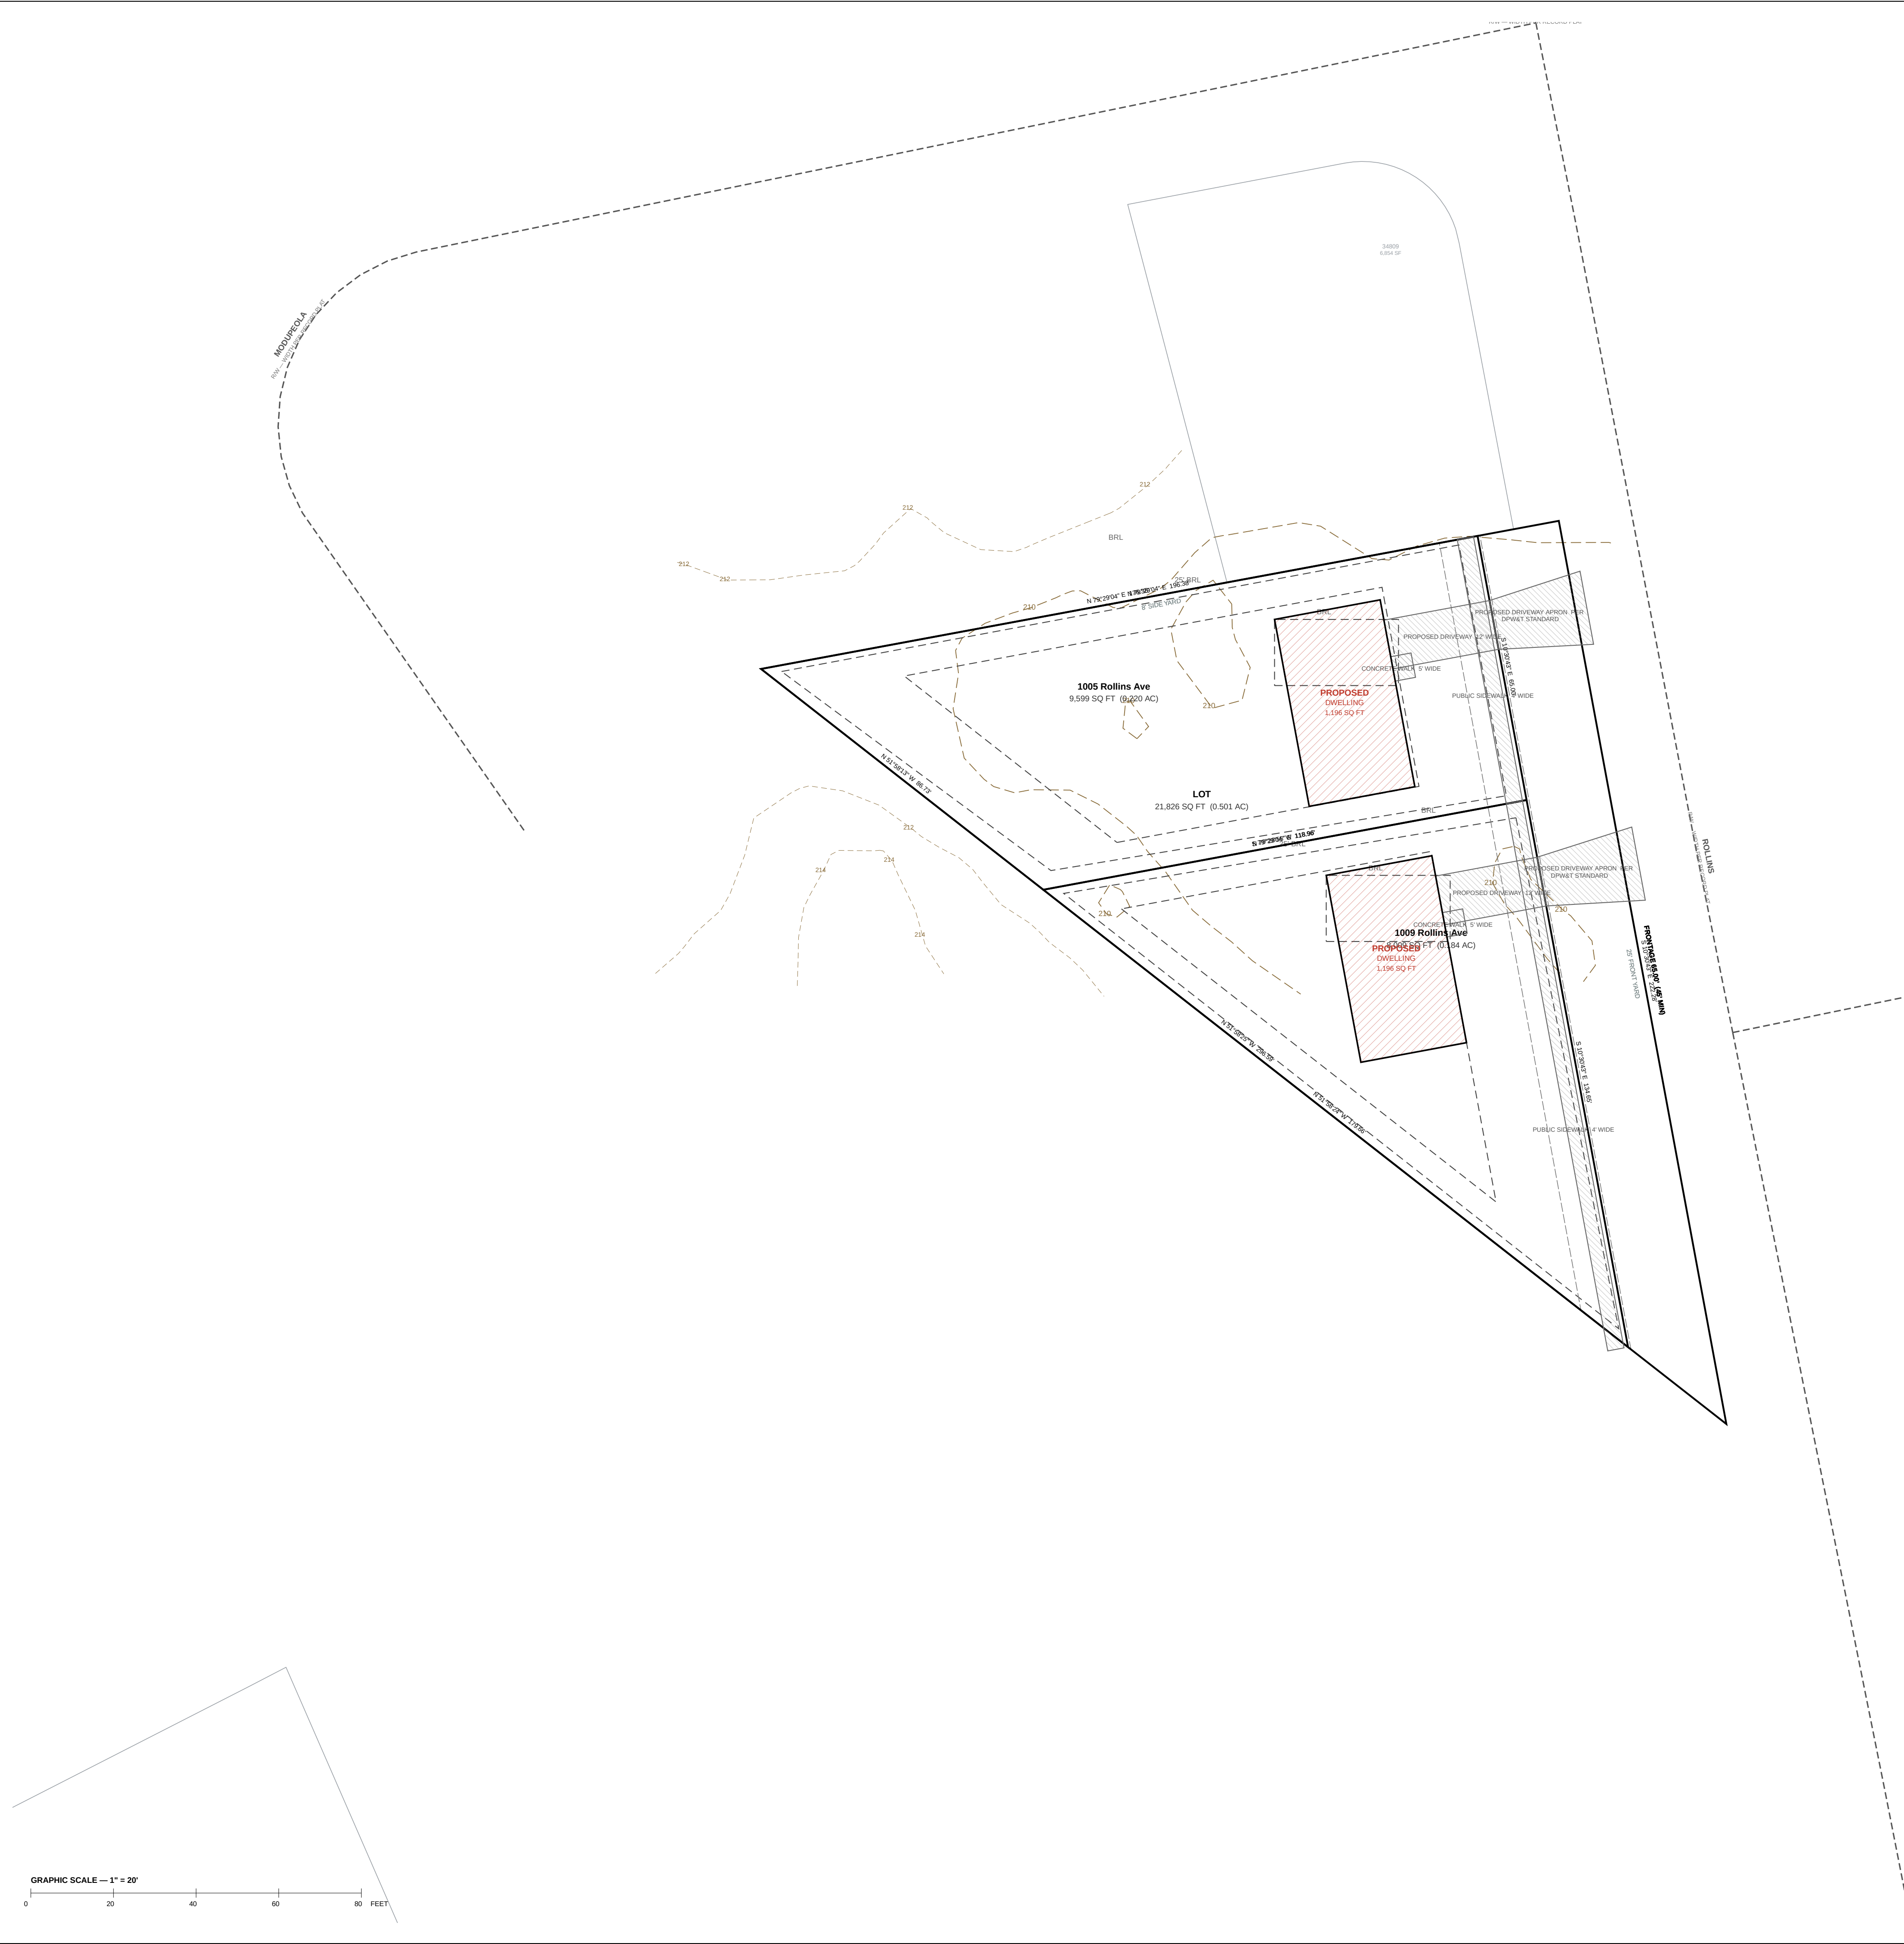

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-300 — Demolition Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
4 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32-106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland, Tax Map 73, GFE #3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rework), Scale 1" = 20', November 2007 M; NSPC Record Plat S-20232, Block of bearings Maryland State Plane Coordinate System (NAD 83), Lot 1 = 9.588 sq ft (0.2203 ac), Lot 2 = 8.008 sq ft (0.1838 ac), 4.219 sq ft (0.0969 ac) dedicated to public use.

NOTES OF RECORD
1. Development of the property shall be in accordance with the approved Stormwater Management Control Plan 4-220-2006-00, or any approved revision thereto.
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfillment of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
3. The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design, constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue, if deemed appropriate by OPWA, upon the issuance of street construction permits.
PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the instrument, not to this drawing.



LEGEND	
-----	PROPERTY BOUNDARY
-----	SRL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ARID, CLAY, SOILS, DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL	
SIGNATURE	DATE

REVISIONS
— NONE —

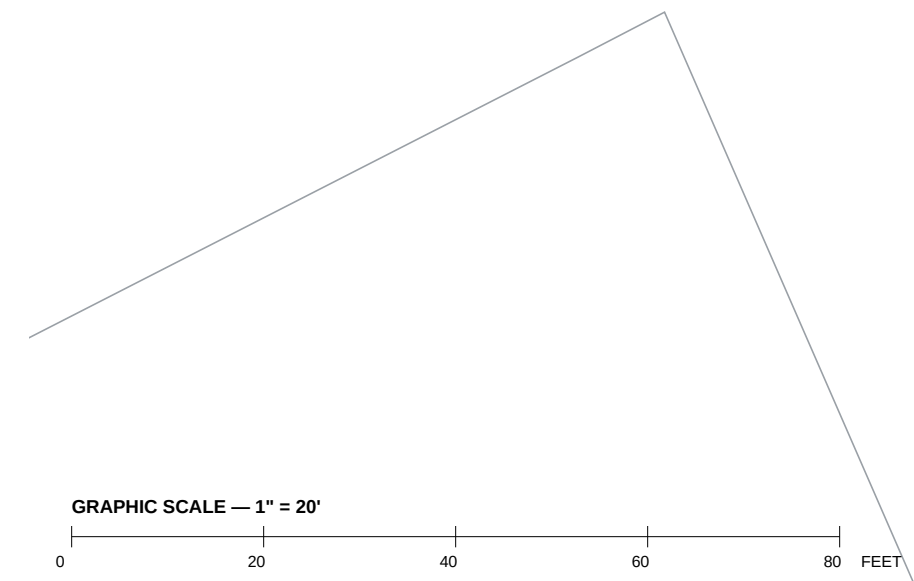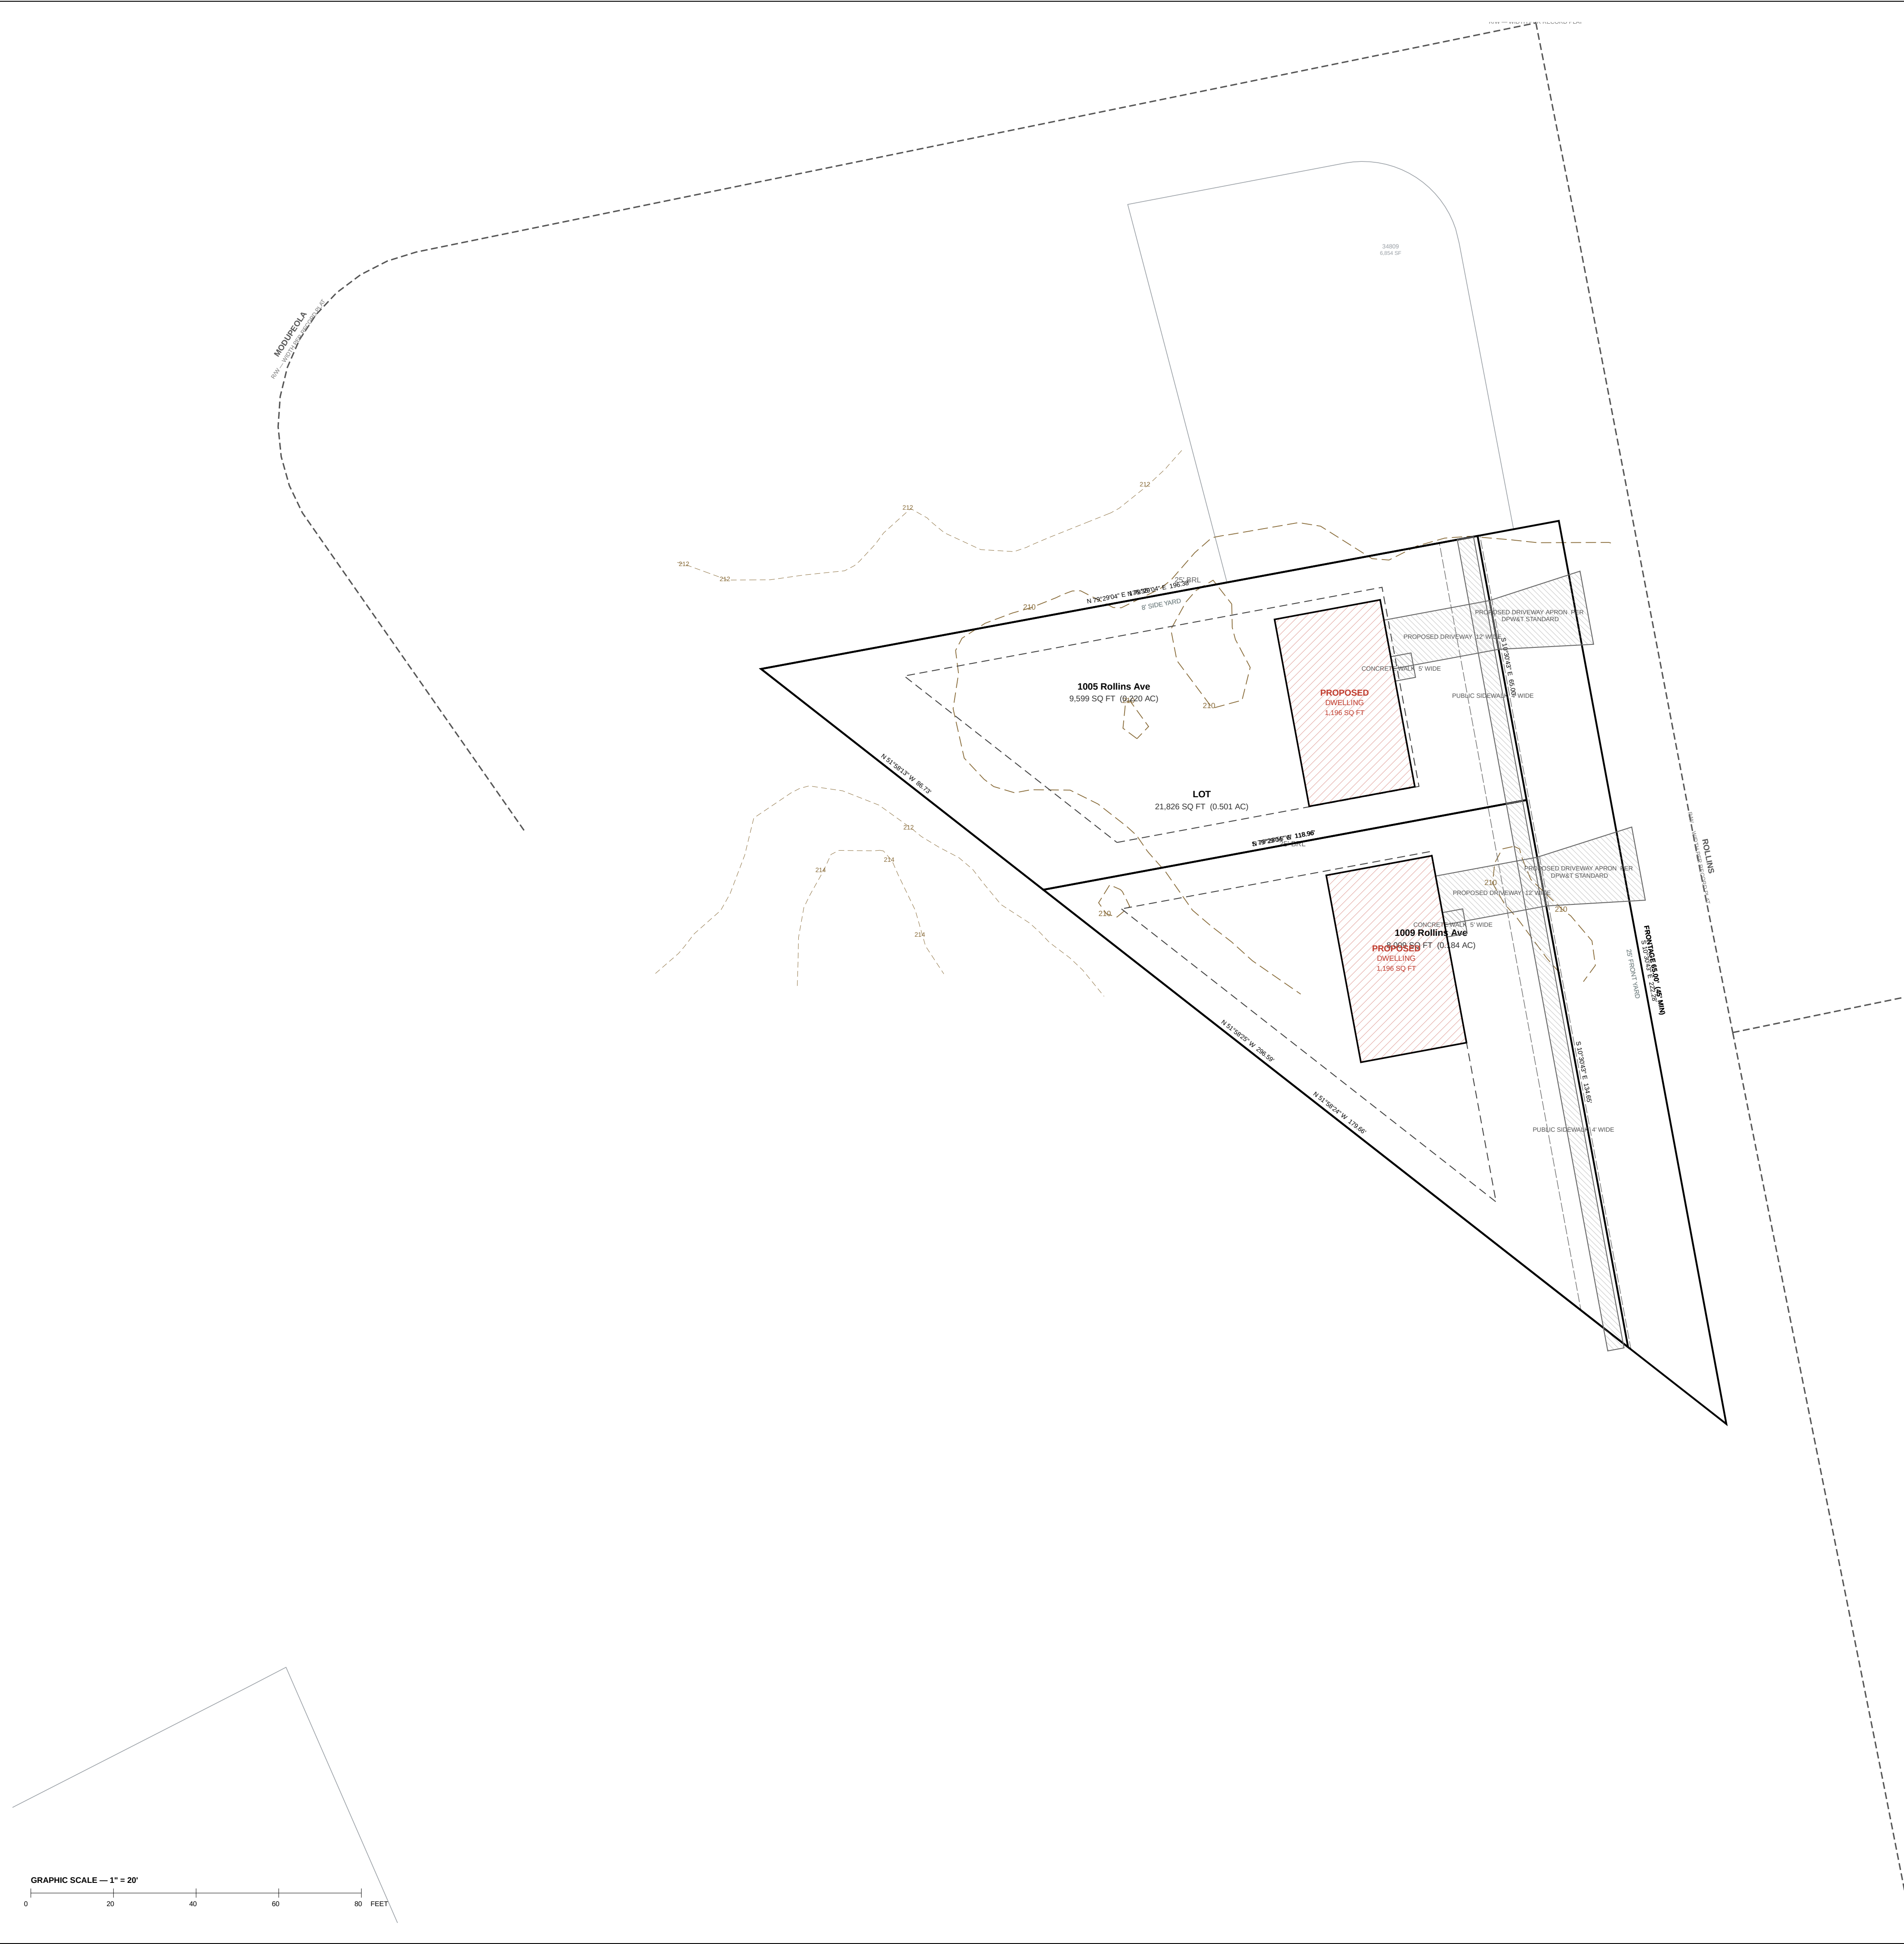

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
5 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID		
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	
	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32-106.
 - PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (MSA, C2383, 19050), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland, No Map 72, GSE 83, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rewrite), Scale 1" = 20', November 2007 M; NSPC Record File S-08232, Board of Engineers, Maryland State Plane Coordinate System (NAD 83), Lot 1 = 9,599 sq ft (0.2203 ac), Lot 2 = 8,008 sq ft (0.1838 ac), 4,219 sq ft (0.0969 ac) dedicated to public use.

- NOTES OF RECORD
- Development of this property shall be in accordance with the approved Stormwater Management Control Plan (1220-2000-00, or any approved revision thereto).
 - Approval of this plan is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519-2-05 commitments.
 - The applicant, his heirs, successors and/or assigns shall utilize an existing driveway design, constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.

PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the statements set in this drawing.

- LEGEND
- PROPERTY BOUNDARY
 - SRL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ANNUAL CONTROL, GRADING, SOIL & DRAINAGE

SIGNATURE DATE

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

GRADING CERTIFICATE
I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE REQUIREMENTS OF SUBTITLE 32, DIVISION 2 OF THE CODE OF PRINCE GEORGE'S COUNTY WATER RESOURCES PROTECTION AND GRADING CODE, AND THAT I OR MY FIRM HAVE INSPECTED THIS SITE AND THAT DRAINAGE FLOWS FROM UPHILL PROPERTIES ONTO THIS SITE, AND FROM THIS SITE ONTO DOWNHILL PROPERTIES, HAVE BEEN ADDRESSED IN SUBSTANTIAL ACCORDANCE WITH APPLICABLE CODES, SIGNED, SEALED AND DATED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF MARYLAND.



Prince George's County DPE, See Rough Grading Design Review Checklist, Item A-10

STABILIZATION COMPLIANCE PREAMBLE
Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.03 by January 9, 2023, regardless of when an erosion and sediment control plan was approved, COMAR 26.17.01.09(5C), Grandfathering of approved plans

STANDARD STABILIZATION NOTE
Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter dikes, seals, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1), and b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.
2021 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01.09(4C))

REVISIONS

— NONE —

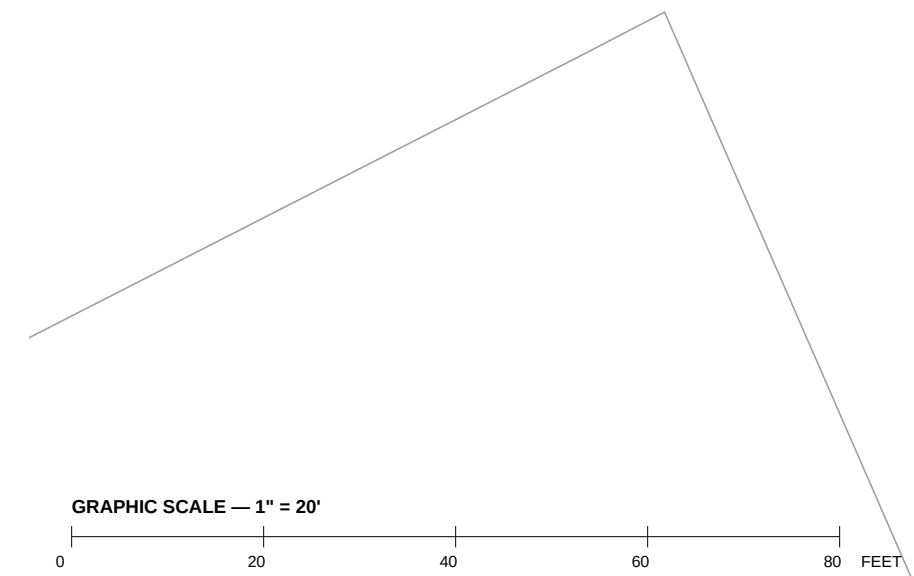

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-500 — Utility Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
6 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32-106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland. Tax Map T3, G16 R3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rework), Scale 1" = 20', November 2007 M. NSPC Record File S-22523, Block of bearings Maryland State Plane Coordinate System (NAD 83). Lot 1 = 9,599 sq ft (0.2203 ac); Lot 2 = 8,008 sq ft (0.1838 ac); 4,219 sq ft (0.0969 ac) dedicated to public use.

NOTES OF RECORD
1. Development of the property shall be in accordance with the approved Stormwater Management Control Plan 4-220-2006-00, or any approved revision thereto.
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
3. The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.
PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the instrument, not to this drawing.


LEGEND	
-----	PROPERTY BOUNDARY
-----	SRL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ARID, CLAY, SLOPE, SCALE, DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL	
SIGNATURE	DATE

REVISIONS
— NONE —

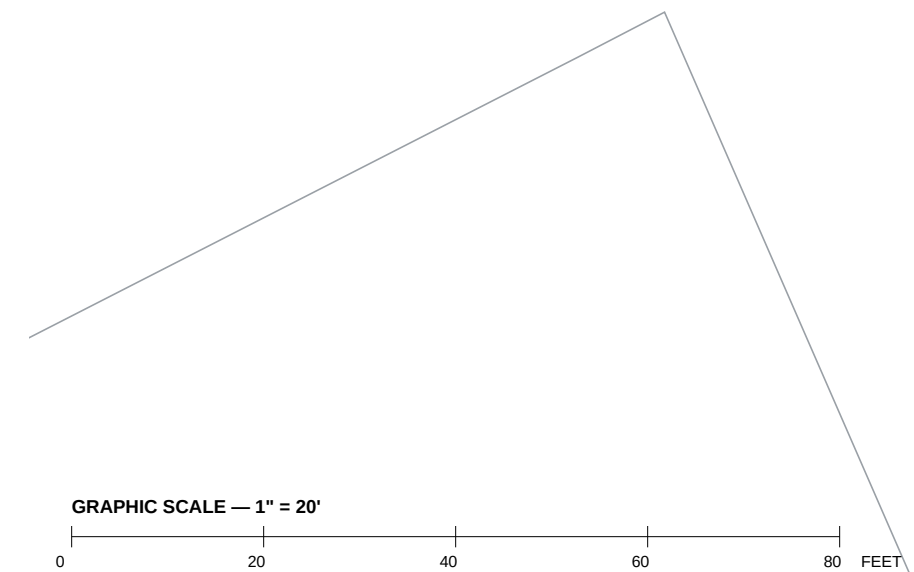

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-600 — Stormwater Management Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
7 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-constructed meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32.106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland. Tax Map 73, GFE #3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rework), Scale 1" = 20', November 2007 M. NSPC Record File S-22632, Block of bearings Maryland State Plane Coordinate System (NAD 83). Lot 1 = 9,599 sq ft (0.2203 ac); Lot 2 = 8,008 sq ft (0.1838 ac); 4,219 sq ft (0.0969 ac) dedicated to public use.

NOTES OF RECORD
1. Development of the property shall be in accordance with the approved Stormwater Management Control Plan (C-220-2006-00, or any approved revision thereto).
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
3. The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.
PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the instrument, not to this drawing.

LEGEND	
-----	PROPERTY BOUNDARY
-----	SRL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRASSING, SOIL & DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —

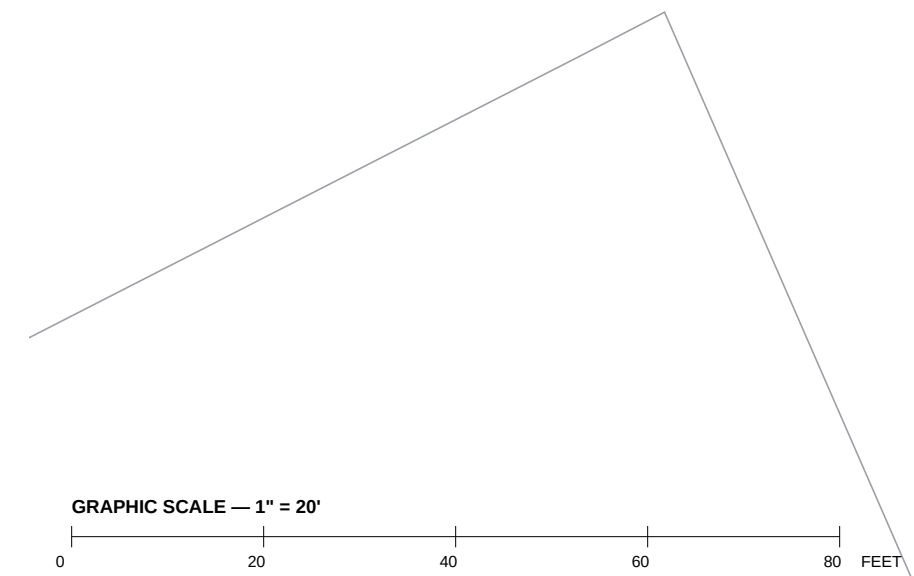

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-700 — Sediment and Erosion Control Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
8 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID		
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 22-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2381, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland. The Map To: GSE 83, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rewrite), Scale 1" = 20', November 2007 M&A, NSPC Record File S-08233, Area of Interest: Maryland State Plane Coordinate System (NAD 83), Lot 1 = 9,599 sq ft (0.2203 ac), Lot 2 = 8,008 sq ft (0.1838 ac), 4,219 sq ft (0.0969 ac) dedicated to public use.

- NOTES OF RECORD
- Development of the property shall be in accordance with the approved Stormwater Management Control Plan (C-220-2006-00, or any approved revision thereto).
 - Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
 - The applicant, his heirs, successors and or assigns shall utilize an existing driveway design, constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA's upon the issuance of street construction permits.

PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the statements, not to the drawings.

- LEGEND
- PROPERTY BOUNDARY
 - SBL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - ALL EXISTING CONTOUR
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

STABILIZATION COMPLIANCE PREAMBLE

Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.01 by January 9, 2013, regardless of when an erosion and sediment control plan was approved. COMAR 26.17.01 (6)(2), Governing body of approved plans.


STANDARD STABILIZATION NOTE

Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1); and b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

(22) Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01.05A(2)).

REVISIONS

— NONE —

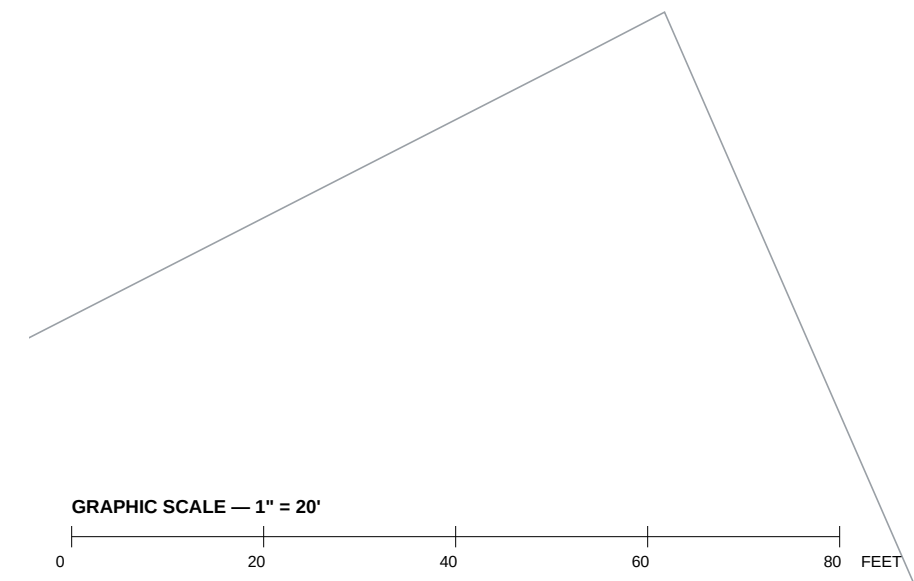

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-800 — Road, Driveway and Paving Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
9 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32.106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland. Tax Map 73, GFE #3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rewrite), Scale 1" = 20', November 2007 M. NSPC Record File S-2023, Block of bearings Maryland State Plane Coordinate System (NAD 83). Lot 1 = 9.588 sq ft (0.2203 ac); Lot 2 = 8.008 sq ft (0.1838 ac); 4.219 sq ft (0.0969 ac) dedicated to public use.

NOTES OF RECORD
1. Development of the property shall be in accordance with the approved Stormwater Management Control Plan 4-220-2006-00, or any approved revision thereto.
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
3. The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design, constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.
PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the instrument, not to this drawing.

LEGEND	
-----	PROPERTY BOUNDARY
-----	SRL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ANNUAL MONITORING, SOILS, DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —

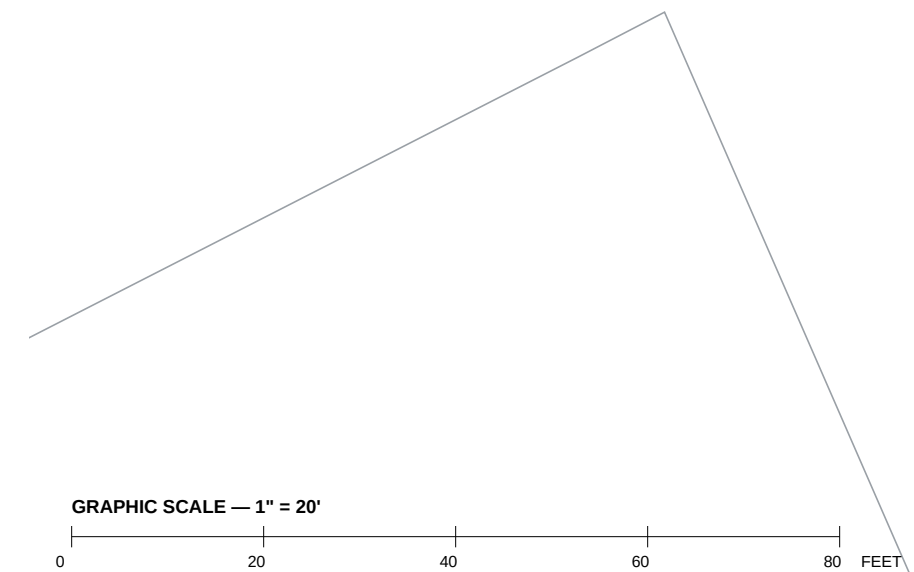

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-900 — Civil Details
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
10 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32-106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer Pressure (SP) Elevation District, Prince Georges County, Maryland. Tax Map 73, GFE #3, 200 May 202 SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rework), Scale 1" = 20', November 2007 M. NSPC Record File S-22632, Block of bearings Maryland State Plane Coordinate System (NAD 83). Lot 1 = 9.588 sq ft (0.2203 ac); Lot 2 = 8.008 sq ft (0.1838 ac); 4.219 sq ft (0.0969 ac) dedicated to public use.

NOTES OF RECORD
1. Development of the property shall be in accordance with the approved Stormwater Management Control Plan 4-220-2006-00, or any approved revision thereto.
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4519 Z-05 commitments.
3. The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design, constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street construction permits.
PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they adhere to the instrument, not to this drawing.

LEGEND	
-----	PROPERTY BOUNDARY
-----	SBL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ANNUAL, SPRING, SCALE, DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —

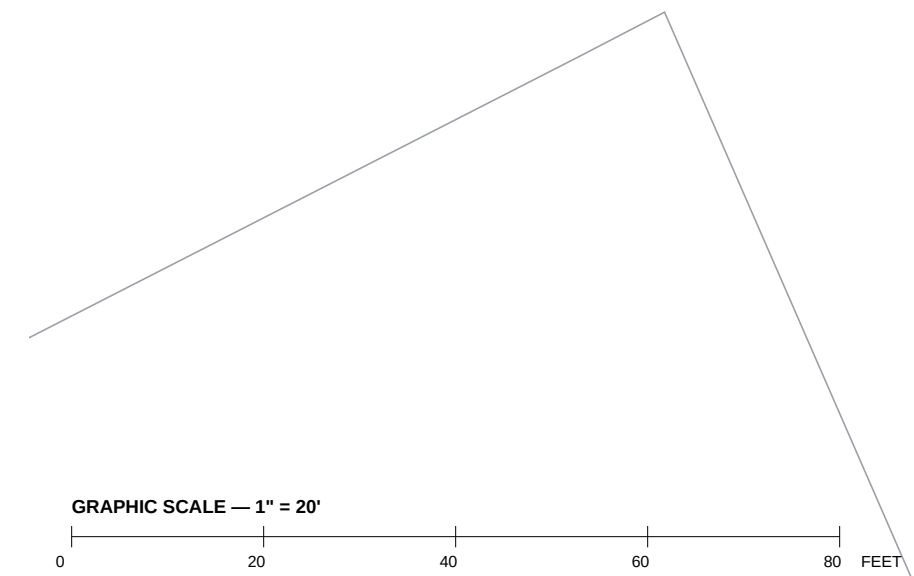

KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
11 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS LOT AREA	21,826 SF	0.501 AC
LOT FRONTAGE	45' MIN	65.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	5.5%
BUILDING FOOTPRINT	—	1,196 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83	

SITE ANALYSIS	
1. Gross tract area	21,826 SF
2. Area of dwelling	1,196 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	21,826 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
 - PROPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (M&A, C2383, 19950), Sewer
Pressure (SP) Elevation District, Prince Georges County, Maryland. To Map 73, GFE 83, 200 May 202
SE 06, Zone R-65 as recorded (RSP-65 under the 2022 rewrite), Scale 1" = 20', November 2007 M.
NAD83 Record File S-2023, Block of bearings Maryland State Plane Coordinate System (NAD 83).
Lot 1 = 9,599 sq ft (0.2203 ac); Lot 2 = 8,008 sq ft (0.1838 ac); 4,219 sq ft (0.0969 ac) dedicated to
public use.

- NOTES OF RECORD
- Development of the property shall be in accordance with the approved Stormwater Management
Control Plan (L-100-2000-00, or any approved revision thereto).
 - Approval of this plan is based upon a reasonable expectation that public water and sewer service will be
available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission
authorization DA 4519 Z-05 commitments.
 - The applicant, his heirs, successors and/or assignees shall utilize an existing driveway design
constructed per OPWA's standards and requirements. Separate, standard residential driveway aprons shall
be provided along Rollins Avenue. If deemed appropriate by OPWA, upon the issuance of street
construction permits.

PUE — Public Utility Easement IPF — Iron Pipe Found For Public Water and Sewer Only
The surveyor certifies, under declaration and approval signatures of the recorded plat and NOT reproduced here, they
adhere to the instrument, not to this drawing.

LEGEND

- PROPERTY BOUNDARY
- SBL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEMI-ARID, CLAY, SOILS, DRAINAGE

SIGNATURE DATE

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

