

SITE DEVELOPMENT CONCEPT PLAN

ESTATES AT INDIAN HEAD — LOTS 1-6 AND ESTATES COURT

Plat Book PM 228 Plat 83 · 200-205 Estates Court, Accokeek, MD 20607 · Tax Map 151 Grid F-3 · Zone RR · Piscataway Election District 5 · Prince George's County, Maryland

Stormwater management by Environmental Site Design to the Maximum Extent Practicable (MDE Design Manual Ch. 5: PGC Subtitle 32, Div. 3). Follows the approved 2009 layout (Street Tree & Lighting Plan, DPW&T permit 9399-2009-00).

PRINCE GEORGE'S COUNTY BMP SUMMARY TABLE (ESD broken out by Point of Investigation — checklist A-15, C-9)

BMP	PRACTICE (HRS)	LOCATION / OWNERSHIP	POI	DA (SF)	BMP (SF)	% I	P E (IN)	Rv	ESDv REQ (CF)	ESDv PRDv (CF)	Rwv REQ (CF)	SURFACE (SF)	N (NAD83)	E (NAD83)
ESD-1	Micro bio-retention (M-4)	Lot 1 (200 Estates Ct), private	POI-1	19,899	3,362	16.8	1.0	0.201	336	420	44	525	367,419	1,311,149
ESD-2	Micro bio-retention (M-4)	Lot 2 (202 Estates Ct), private	POI-1	20,015	3,315	16.6	1.0	0.199	332	332	43	330	367,398	1,311,251
ESD-3	Micro bio-retention (M-4)	Lot 3 (204 Estates Ct), private	POI-1	20,051	3,537	17.6	1.0	0.209	349	349	45	388	367,381	1,311,390
ESD-4	Micro bio-retention (M-4)	Lot 4 (205 Estates Ct), private	POI-1	20,021	2,558	12.8	1.0	0.165	275	275	36	298	367,219	1,311,301
ESD-5	Micro bio-retention (M-4)	Lot 5 (203 Estates Ct), private	POI-1	20,235	3,441	17.0	1.0	0.203	342	342	45	340	367,175	1,311,173
ESD-6	Micro bio-retention (M-4)	Lot 6 (201 Estates Ct), private	POI-1	29,536	3,257	11.0	1.0	0.149	367	367	48	376	367,084	1,310,952
ESD-S1	Dry swale (M-8) w/ check dams — street	Estates Ct RW, north roadside (public, DPIC)	POI-1	18,020	9,180	50.9	1.8	0.508	1,374	1,374	99	4,601	367,401	1,311,069
ESD-S2	Dry swale (M-8) w/ check dams — street	Estates Ct RW, south roadside (public, DPIC)	POI-1	18,020	9,180	50.9	1.8	0.508	1,374	1,374	99	8,017	367,334	1,311,116
SUBTOTAL POI-1			POI-1	165,898	37,831				4,750	4,835	459			
TOTAL 8 ESD practices			ESDv provided as required at every POI			165,898	37,831	22.8		4,750	4,835	459	14,876	

P, E from MDE Design Manual Table 5.3, HSG C (governing on site). Rv = 0.05 + (0.0091). ESDv = P, E-Rv-A12. Rev = 5-Rv-A12, 5 = 0.13 in (HSG C); Rev is met within ESDv (percent-volume method). Micro bio-retention: 12 in max. ponding, 2.5 ft filter media (n = 0.40), underdrain to stable outfall; infiltration credit only where the Sec. 32-131 soil borings show ≥ 0.52 in/hr.

SITE DATA (DPIC Concept Application, rev. 07/28/2021)

APPLICATION DATA	
Project name	Estates at Indian Head, Lots 1-6
Geographic location	S. side of MD 210 (Indian Head Hwy), ±3,000 ft NE of MD 210 / MD 373 (Livingston Rd)
Street address	200, 201, 202, 203, 204, 205 Estates Court, Accokeek, MD 20607
Companion cases	NR1-015-06, TCPI-018-06, TCP2-016-09 (current); final plat S-08238 (PM 228 @ 83); DPW&T 9399-2009-00 street tree & lighting
Lots / area	6 lots + public RW: 165,902 sf (3,809 ac) computed, 165,013 sf of record (plat 171,505 sf less Outlet A)
Tax accounts	3987666, 3987674, 3987682, 3987690, 3987708, 3987716
Tax map / WSSC 200'	151 F-3 / 220501
Master plan	2013 Approved Subregion 5 Master Plan & SMA (CR 8081-2013); Planning Area 84, Piscataway & Vicinity
Master plan road	MD 210 Indian Head Highway (Frontage, SHA) — access by Estates Court only
Council / election district	District 9 / District 5 (Piscataway)
Municipality	None (unincorporated) — PGAtlas Administrative/30
Historic site / scenic road	None / None; Mount Vernon Viewshed Area of Primary Concern covers the site
Zone (current / proposed)	RR / RR (no change) — Sec. 27-4202: 20,000 sf min., 25' front, 8' side, 20' rear, 25% max. coverage
MD 12-digit watershed	021402030798 — Piscataway Creek (MD 8-digit 02140203); County watershed: Piscataway Creek
Impaired / TMDL	Chesapeake Bay TMDL (N, P, sediment) applies; Piscataway Creek listings to be confirmed on MDE TMDL data center at submission
Tier II / hotspot	No (no MDE Tier II catchment intersect) / No (single-family residential)
Ex. site imp. area	0 sf (vacant, wooded; DEVELOPED = N on all six accounts)
New site imp. area	37,831 sf (22.8% of tract) — roofs, driveways, walks, Estates Court pavement, curb and sidewalk
Est. disturbed area	70,787 sf (1.63 ac), incl. 4,054 sf off-site in the WSSC easement (Outlet A, Lot 20)
Marlboro clay / public project	No (PGAtlas Environmental/7; none within 100 ft) / No
Road section	Open section (rural), as approved 2009: Estates Court 60' RW, 24' pavement, 4' shoulders, roadside swales, cul-de-sac
Water / sewer	W-3 / S-3 community systems (WSSC), Piscataway Creek sewer basin; mains from Henrietta Dr via 30' WSSC esmt L-51799 F-399

INDEX OF SHEETS

SHEET	TITLE
SDC-1	Site Development Concept Plan — Cover, BMP Summary Table, ESD Computations, Notes
SDC-2	Site Development Concept Plan — Plan View, Drainage Area Map and Environmental Features, 1" = 40'
C-000 - L-100	Site Development Plan set (11 sheets, companion): existing conditions, site/zoning, grading, utility, SWM, ESC, road, details, landscape

GENERAL NOTES

- Boundary: recorded plat PM 228 @ 83 (final plat S-08238). Lot lines are the county parcel geometry, which reproduces the plat bearings to the second and distances to 0.02 ft; closure of every lot ± 0.02 ft. A Maryland licensed surveyor shall confirm the boundary and set the Indian Head Hwy ROW before technical plans.
- Topography: M-NCPPC 2-ft contours (INWD 88), extended ±100 ft beyond the property (A-13). The 2009 approved sheet (2005 Landside field survey, WSSC datum) is georeferenced and shown faint on SDC-2 for reference. V-1: DPIC prefers NGVD 29; the field-run update shall state the datum and conversion.
- Outlet A (6,486 sf) was conveyed to M. & K. Doyal (L-51565 F455) and is not part of this site. Water and sewer reach Estates Court through the recorded 30-ft WSSC easement across Outlet A and Lot 20. Treeview Estates (L-51799 F-399, Rev. 2023) and a 30-ft WSSC easement to be granted across Lot 4.
- Easement record discrepancies to resolve with WSSC before technical plans: Schedule A describes N 03°24'09" W where the plat and Exhibit A show N 03°27'26" W; the curve is written "N 043°07'06" W"; the recited deed dates are inconsistent.
- Estates Court (60-ft RW, 35,173 sf of record) is dedicated to public use on the plat and is not built. The entrance is on MD 210 (SHA): an SMA access permit and a sight-distance analysis (checklist item A.10) are required. The 30-ft RW for use in common (L-10142 F-723) adjoins to the south-west and is not used.
- R-1: Estates Court keeps the 2009 rural open section (DPW&T Std. 500.10 / 600.02 / 600.04): 24-ft pavement, 4-ft shoulders and roadside dry swales (M-8). Driveways cross the swale on 15-in. culverts or as swale driveways per DPW&T; aprons are 12 ft at the RW with 5-ft flares at the edge of pavement. Confirm the section with DPIC/DPW&T for a rural residential cul-de-sac.
- All six lots are vacant (no existing impervious area, no structures to remove). No wells or septic systems are proposed; the existing well on Parcel 199 (15608 Indian Head Hwy) is ≥100 ft from the proposed mains.
- Stormwater management to ESD to the MDP: each lot drains to one micro-bio-retention cell (M-6) sized for its own roof and paving. Estates Court sheet-flows off the shoulders into roadside dry swales (M-8) with check dams, north and south, draining west to the entrance. Rooftop and non-rooftop disconnection (N-1, N-2) are to be credited at technical design and will reduce the cells.
- Quantity: the site is <1 ac of new impervious area on HSG C soils. The 10-yr and 100-yr (Op10/Qof) analyses at each POI accompany this plan in the concept narrative. ESD storage is subtracted per MDE Ch. 5. Outfalls as tabulated; each discharge as sheet flow through a level spreader.
- Approval of record (current): NR1-015-06, TCPI-018-06, TCP2-016-09. Still to be submitted: geotechnical report with Sec. 32-131 infiltrations (E-1, E-2), soil borings, affidavit of the adjacent-owner notification (Sec. 32-182)(g), mailed within 7 days of submittal, and the application fee (\$500 + 5% technology fee).
- Contact Miss Utility (811) at least 48 hours before any excavation.

ENVIRONMENTAL FEATURES


ENVIRONMENTAL FEATURE (CHECKLIST B)	FINDING AND SOURCE
B-1B-2 Streams & buffers	None on site (verified on PGAtlas; approved NR1-015-06).
B-3 Wetlands	None mapped on or within 100 ft (DNR wetlands, WSSC). Confirm by NR1 field delineation.
B-4 100-yr floodplain	None. FEMA Zone X (area of minimal flood hazard); no DPIC or consultant floodplain within 100 ft.
B-5 Steep slopes	15–25%: 2,757 sf; >25%: 520 sf on site (PGAtlas Slope 2023) — isolated.
B-6 PMA	None on site (approved NR1-015-06).
B-7 Woodland	Per approved NR1-015-06 and TCP2-016-09 (current); the 2009 layout is followed, so the approved TCP2 woodland conservation governs. 2023 canopy 132,705 sf shown for reference.
B-9 Soils	C&E: Croom-Marr complex, 15 to 25 percent slopes (HSG C, K-15) 2%; UdaF udorthents, highway, 0 to 65 percent slopes (HSG None, K None) 2%; Ball Beltsville silt loam, 2 to 5 percent slopes (HSG C, K-37) 9.
B-10 TMDL / Tier II	Chesapeake Bay TMDL watershed; not within a Tier II catchment; DNR Stronghold watershed (021402030798).
B-11 Highly erodible	Slopes ≥15% with K ≥ 0.35 are highly erodible: the 15–25% patches on Ball (K-37) qualify — stabilize within 3 days.
B-12B-13 Springs, bedrock, Marlboro clay	None observed (2005 field survey) or mapped. Geotechnical report to confirm (E-1, E-2).
B-14 Chesapeake Bay Critical Area	Not in the CBCA overlay (PGAtlas Zoning/3).
Other	FIDS habitat (DNR) overlaps 1.9 ac; Green Infrastructure Evaluation Area; Priority Woodlands for Retention; ESA 2 (Plan 2035).

POINTS OF INVESTIGATION (C-9) — from D8 flow routing on M-NCPPC 2-ft topography

POI	LOCATION (NAD83)	SHARE OF SITE	ESD PRACTICES
POI-1	N 367,259 E 1,311,041	89%	ESD-1, ESD-2, ESD-3, ESD-4, ESD-5, ESD-6, ESD-S1, ESD-S2
POI-2	N 367,499 E 1,311,246	10%	—

Off-site drainage onto the tract: 116,500 sf (2.67 ac), from the Treeview Estates rear yards to the north and east (C-11). It is passed through by sheet flow around the ESD cells; no off-site area is routed into a practice.

VICINITY MAP SCALE: 1" = 2,000'

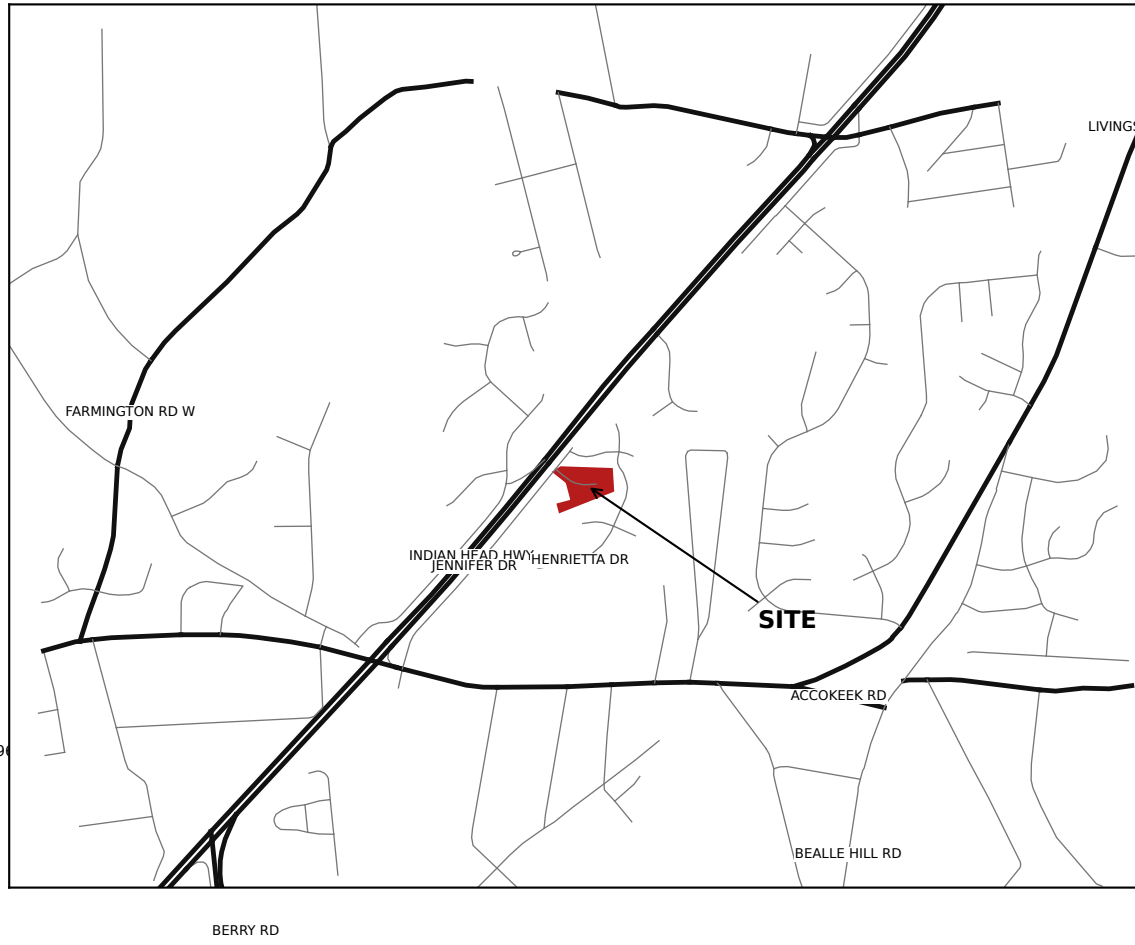

PLAN TYPE SITE DEVELOPMENT CONCEPT PLAN

PROJECT ESTATES AT INDIAN HEAD LOTS 1-6 AND ESTATES COURT

LOCATION
200-205 ESTATES COURT, ACCOKEEK, MD 20607
PLAT PM 228 @ 83 · TAX MAP 151 F-3
WSSC 220501 · ELECTION DIST. 5
COUNCIL DIST. 9 · ZONE RR

OWNER / APPLICANT
GERALD WALDMAN REVOCABLE TRUST
400 N. FLAGLER DR., WEST PALM BEACH, FL 33401
(L-32062 F043)

ENGINEER
W.L. MEEKINS, INC. — BILL MEEKINS, JR.
3101 RITCHIE ROAD, FORESTVILLE, MD 20747
301-736-1115 · info@meekins.net

PREPARED WITH
KEALEE SITE-PLAN ENGINE (DRAFT FOR PE REVIEW)

SHEET TITLE COVER SHEET, BMP SUMMARY TABLE, ESD COMPUTATIONS AND NOTES

SCALE

AS NOTED

DATUM
HORIZ: MD STATE PLANE NAD 83 (EPSG 2248), US FT
VERT: NAVD 88 (M-NCPPC 2-ft TOPOGRAPHY)
DPIC PREFERENCES NGVD 29 — SEE NOTE V-3

DATE
2026-09-30 · CONCEPT SUBMISSION 1

REVISIONS

PROFESSIONAL CERTIFICATION

I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional engineer under the laws of the State of Maryland. License No. ____ Expiration ____

(SEAL)

NOT SEALED — DRAFT FOR PE REVIEW

SHEET

SDC-1

RESERVED FOR PRINCE GEORGE'S COUNTY
DPIC APPROVAL BLOCK — KEEP CLEAR

SITE DEVELOPMENT CONCEPT PLAN — PLAN VIEW / DRAINAGE AREA MAP



LEGEND

- Site boundary (plat PM 228 @ 83)
- Lot line / R/W line
- Proposed pavement, walk, driveway
- Proposed dwelling (1,900 sf fp.)
- ESD practice — micro-bioretenment (M-6)
- ESD practice — roadside dry swale (M-8)
- Drainage area divide (to device)
- Off-site drainage area onto site
- 100-yr overflow path
- Point of investigation
- Limit of disturbance
- Slopes 15-25%
- Slopes > 25%
- Existing tree canopy (2023)
- Soil boundary (NRCS)
- WSSC easement (recorded / proposed)
- Prop. 8" water main
- Prop. 8" sewer main
- Ex. contour, 2 ft (NAVD 88)
- 2009 approved sheet (reference)

PLAN NOTES

- Plan scale 1" = 40' (± 1" = 50'; A-11); the whole property is on this sheet. Three grid ticks (A-8) are State Plane NAD 83.
- Drainage areas are the engineer's per lot catchments; POI and the 100-yr overflow path are from DB flow routing on the WACPC 2-R surface. Rest from the field-run survey.
- Every lot drains to one M-6 catchment; Estates Court drains to roadside dry swales ESD-5/52 (M-8), which discharge at the entrance low point (EL +230.4) to the MD 210 roadside ditch (SHA review).
- No disturbance in floodplain, wetlands or slopes > 25% (approved NR-015-06).
- The faint underlay is the 2009 approved Street Tree & Lighting sheet (2005 field topography, WSSC datum), grandfathered to the plat (median residual 0.44 ft). Its houses, mains and street lights are superseded.
- Easements: 30' WSSC L51799 F399 (Outlet A 906 sf; Lot 20 1.154 acf recorded; 30' WSSC across Lot 4 proposed. Private SWM easements over ESD-5/52 to be recorded with a maintenance agreement.

PLAN TYPE
SITE DEVELOPMENT CONCEPT PLAN

PROJECT
ESTATES AT INDIAN HEAD LOTS 1-6 AND ESTATES COURT

LOCATION
200-205 ESTATES COURT, ACCOKEEK, MD 20607
PLAT PM 228 @ 83 - TAX MAP 151 F-3
WSSC 220801 - ELECTION DIST. 5
COUNCIL DIST. 9 - ZONE RR

OWNER / APPLICANT
GERALD WALDMAN REVOCABLE TRUST
400 N. FLAGLER DR., WEST PALM BEACH, FL 33401
(L32062 F043)

ENGINEER
W.L. MEEKINS, INC. — BILL MEEKINS, JR.
3101 RITCHIE ROAD, FORESTVILLE, MD 20747
301.736-7115 - info@meekins.net

PREPARED WITH
KEALEE SITE-PLAN ENGINE (DRAFT FOR PE REVIEW)

SHEET TITLE
PLAN VIEW, DRAINAGE AREA MAP AND ENVIRONMENTAL FEATURES

SCALE
1" = 40'

DATUM
HORIZ: MD STATE PLANE NAD 83 (EPSG 2248), US FT
VERT: NAVD 88 (M-NCPC 2-FT TOPOGRAPHY)
DPIE PREFERENCES — SEE NOTE V-3

DATE
2026-09-30 - CONCEPT SUBMISSION 1

REVISIONS

PROFESSIONAL CERTIFICATION

I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional engineer under the laws of the State of Maryland. License No. _____ Expiration _____

(SEAL)

NOT SEALED — DRAFT FOR PE REVIEW



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6

ADDRESS

200, 201, 202, 203, 204, 205 ESTATES COURT

JURISDICTION

Prince George's County, Maryland

ZONE

RR

SHEET

C-100 — Existing Conditions and Boundary Plan

SCALE

1" = 50'

STATUS

PRELIMINARY

SHEET NO.

1 OF 5

COORDINATES

EPSG-2248

H: NAD83

V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-100 — Existing Conditions and Boundary Plan
DISCIPLINE	Maryland Licensed Surveyor
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

1	C-100	Existing Conditions and Boundary Plan
2	C-400	Grading and Drainage Plan
3	C-500	Utility Plan
4	C-700	Sediment and Erosion Control Plan
5	L-100	Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG-2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	165,902 SF
2. Area of dwelling	13,629 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	129,857 SF
6. TOTAL AREA DISTURBED	55,208 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab · B: basement · FF: finished floor · SF: square foot · HT: height · STY: story. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.6%	0.77	1.15	0.38	349
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.0%	1.14	1.49	0.35	367
PROJECT TOTAL	129,857	15.0%	5.00	7.10	2.10	2,001

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APPROX PER DPW&T STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.


PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

REVISIONS

— NONE —

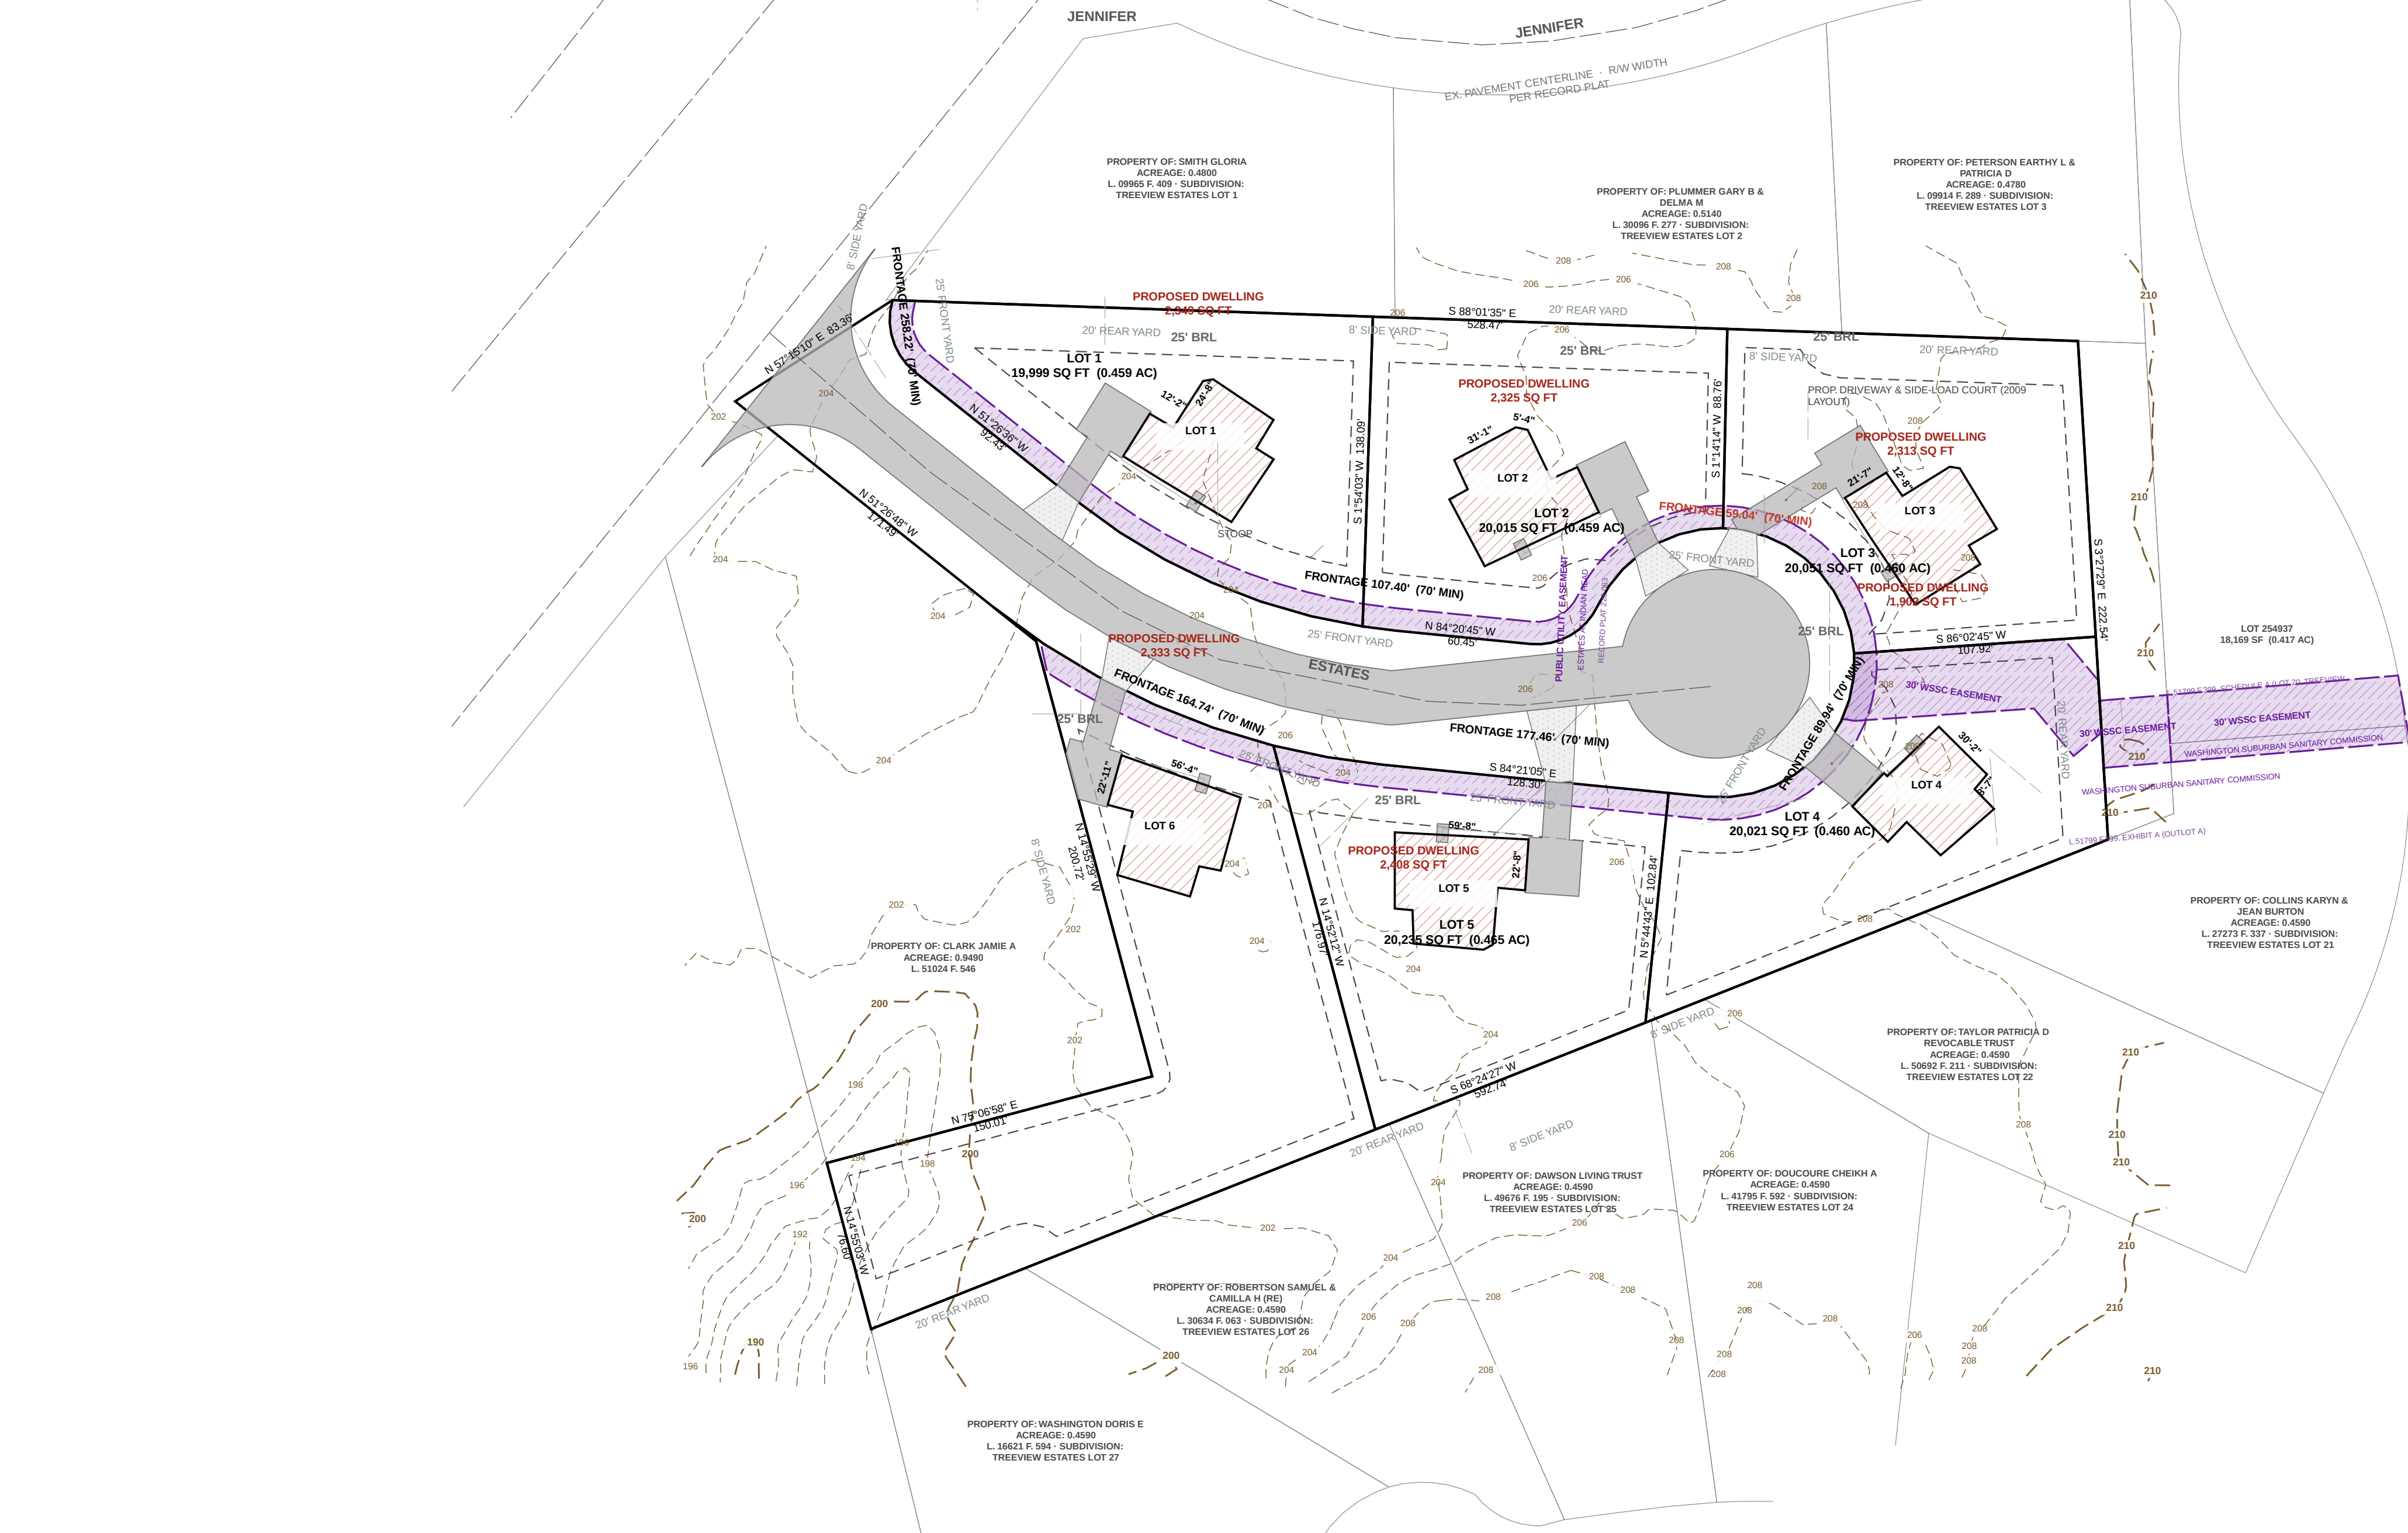


SOILS TABLE

USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GRP.	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

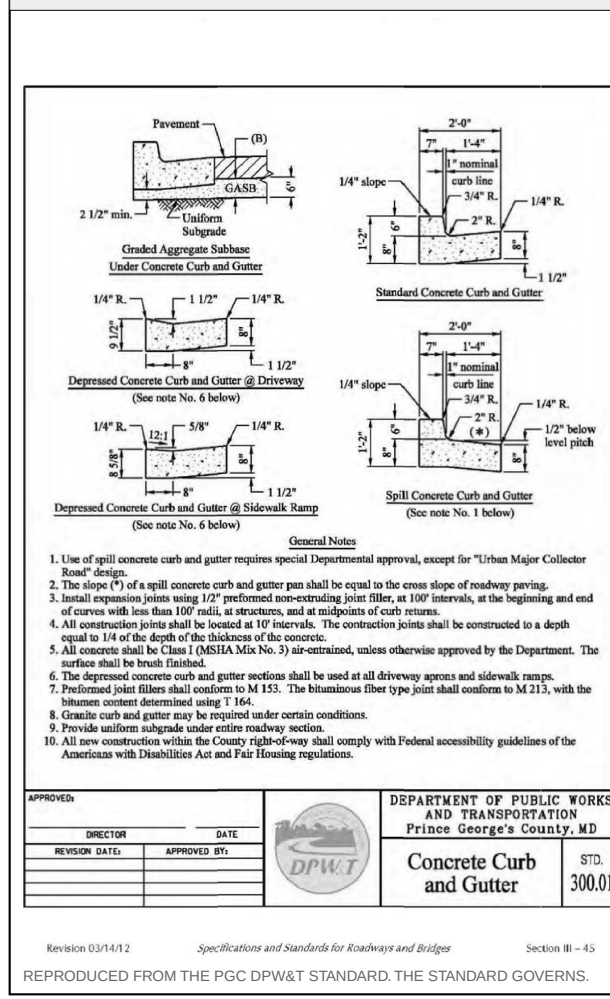

GRAPHIC SCALE — 1" = 50'

0 50 100 150 200 FEET

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

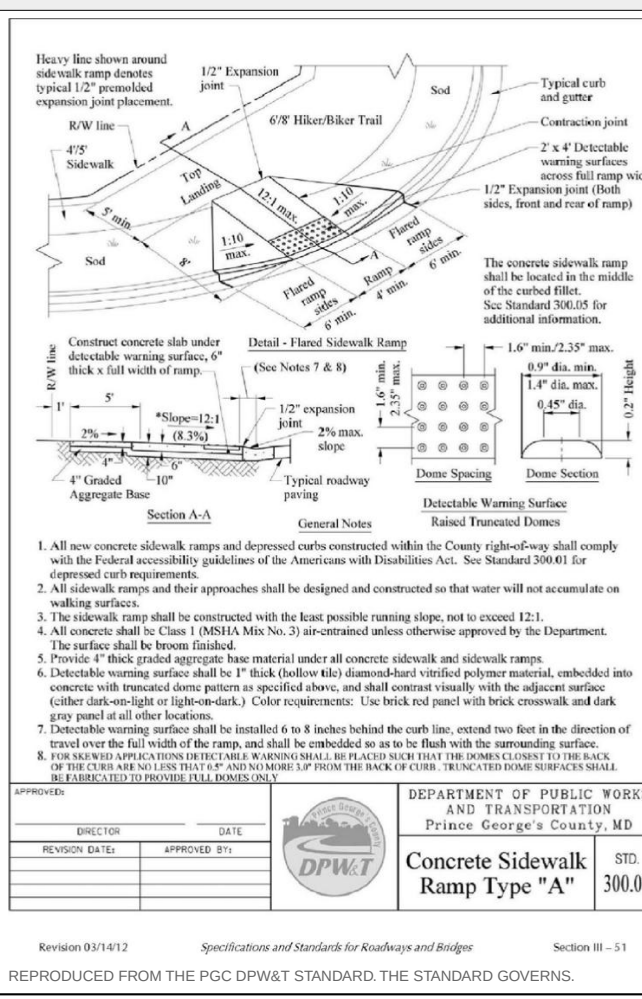

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6

ADDRESS

200, 201, 202, 203, 204, 205 ESTATES COURT

JURISDICTION

Prince George's County, Maryland

ZONE

RR

SHEET

C-400 — Grading and Drainage Plan

SCALE

1" = 50'

STATUS

PRELIMINARY

SHEET NO.

2 OF 5

COORDINATES

EPSG:2248

H: NAD83

V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-400 — Grading and Drainage Plan
DISCIPLINE	Maryland Professional Engineer
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

REVISIONS

NO. DATE DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,208 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab - B: basement - FF: finished floor - SF: square foot - HT: height - STY: stories. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.6%	0.77	1.15	0.38	349
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.0%	1.14	1.49	0.35	367
PROJECT TOTAL	129,857	15.0%	5.00	7.10	2.10	2,001

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Final grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES


- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION; NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER PDWAT STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


IF REQUIRED, NOTES/DO NOT FIT THIS SHEET; GRADING CERTIFICATE; STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE. THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

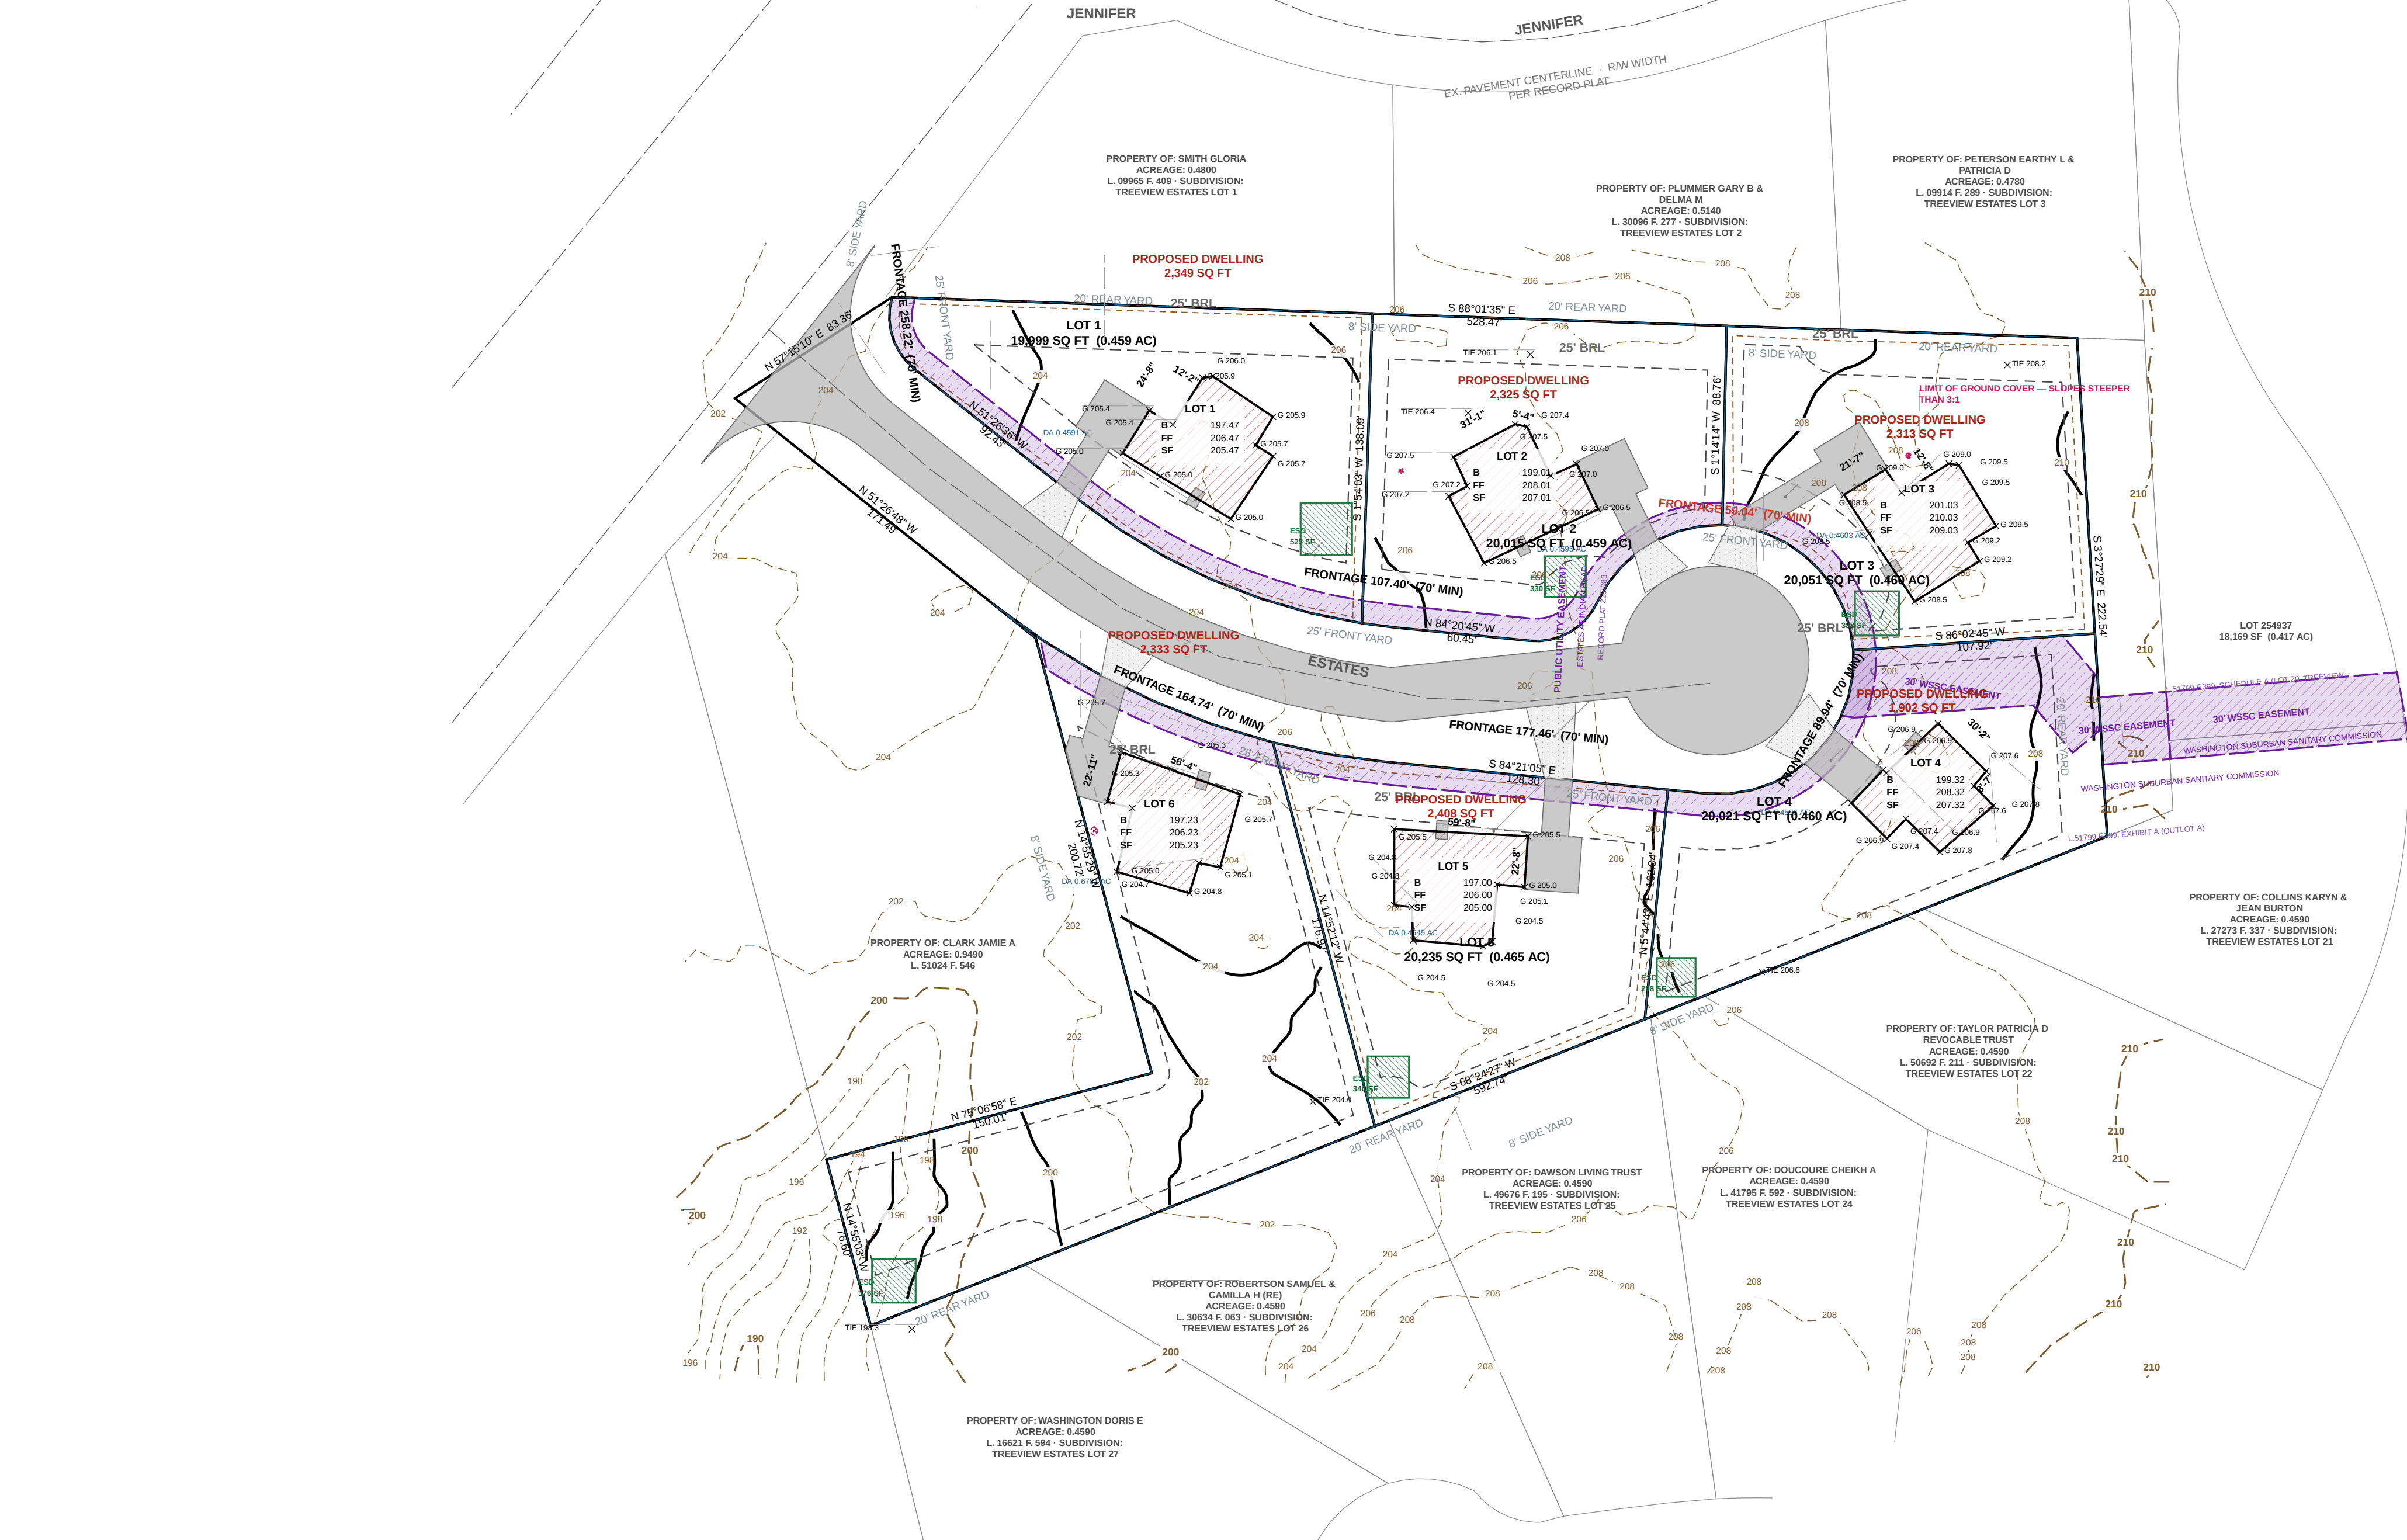

SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)


MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

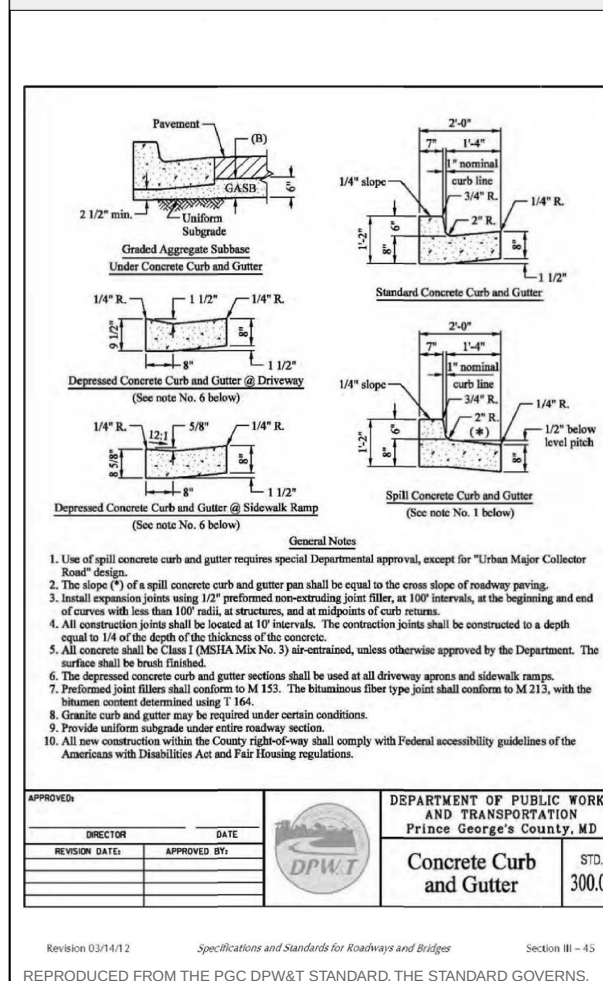

GRAPHIC SCALE — 1" = 50'

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

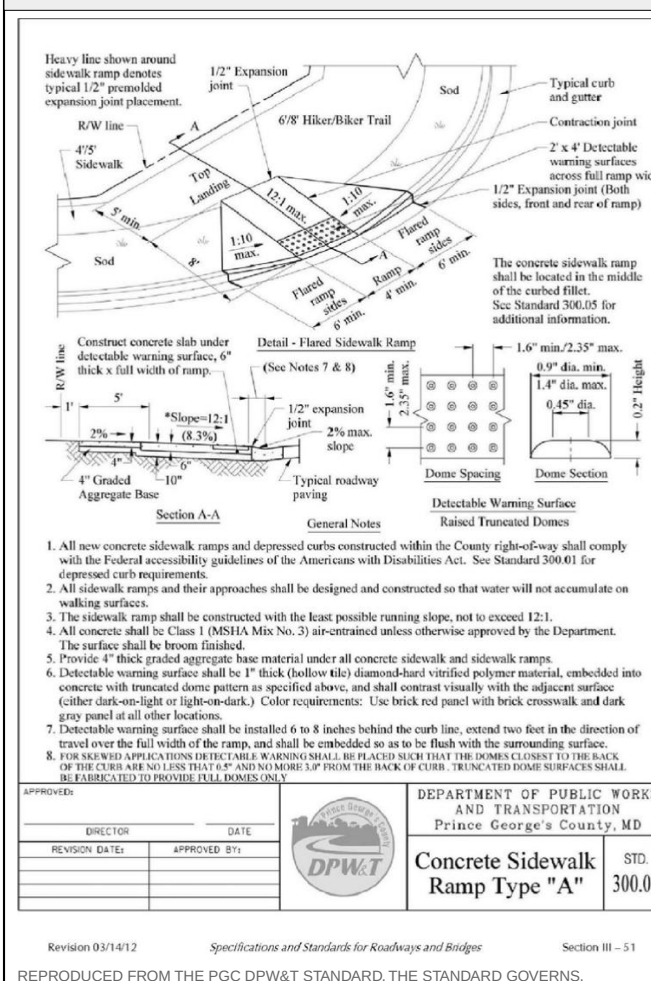

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.

KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6

ADDRESS

200, 201, 202, 203, 204, 205 ESTATES COURT

JURISDICTION

Prince George's County, Maryland

ZONE

RR

SHEET

C-700 — Sediment and Erosion Control Plan

SCALE

1" = 50'

STATUS

PRELIMINARY

SHEET NO.

4 OF 5

COORDINATES

EPSG 2248

H: NAD83

V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-700 — Sediment and Erosion Control Plan
DISCIPLINE	Maryland Professional Engineer
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG-2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,208 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab · B: basement · FF: finished floor · SF: square foot · HT: height · STY: story. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.6%	0.77	1.15	0.38	349
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.0%	1.14	1.49	0.35	367
PROJECT TOTAL	129,857	15.0%	5.00	7.10	2.10	2,001

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Final grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION; NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APPROX PER DPW&T STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE


DATE

SEAL

LICENSE NO.

EXPIRATION DATE


REQUIRED NOTE(S) DO NOT FIT THIS SHEET: STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE. THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

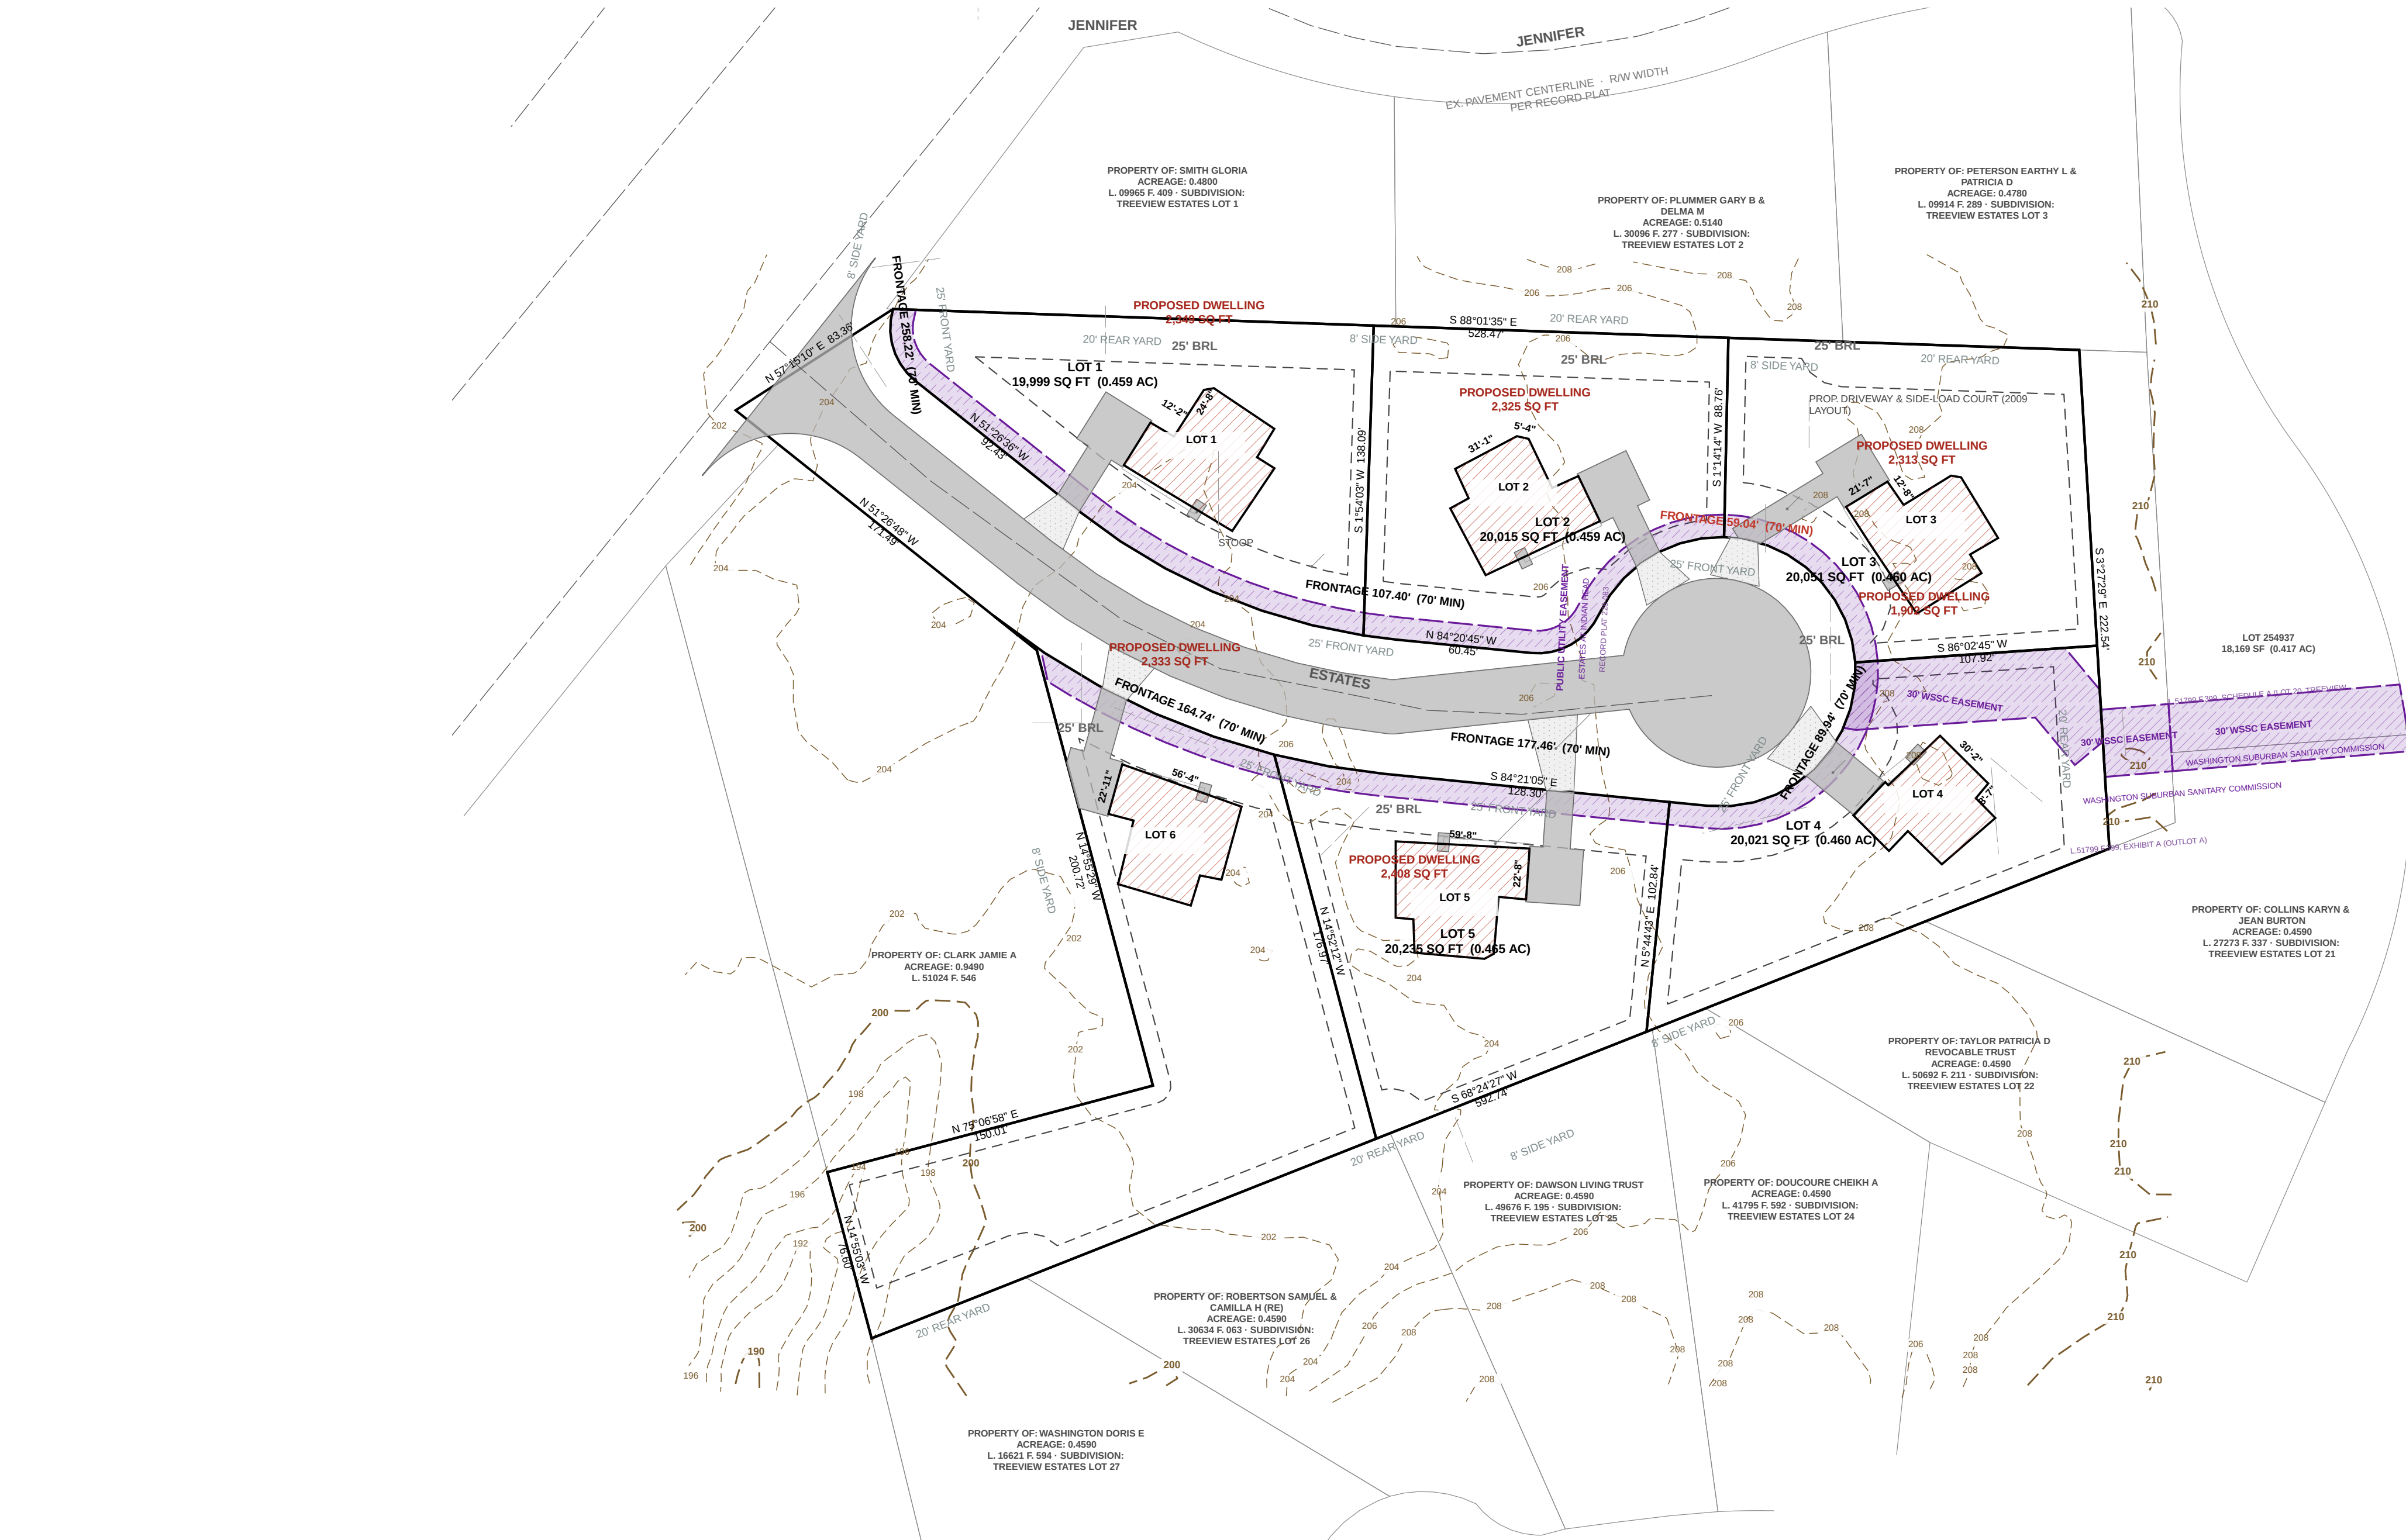

SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

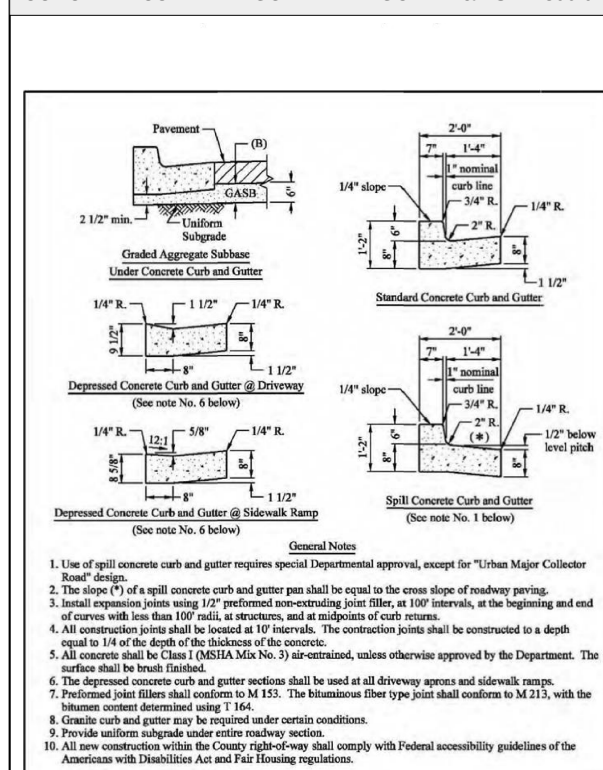


APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DESIGNED BY	APPROVED BY	Concrete Curb and Gutter
300.01		

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.

GRAPHIC SCALE — 1" = 50'

0 50 100 150 200 FEET

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

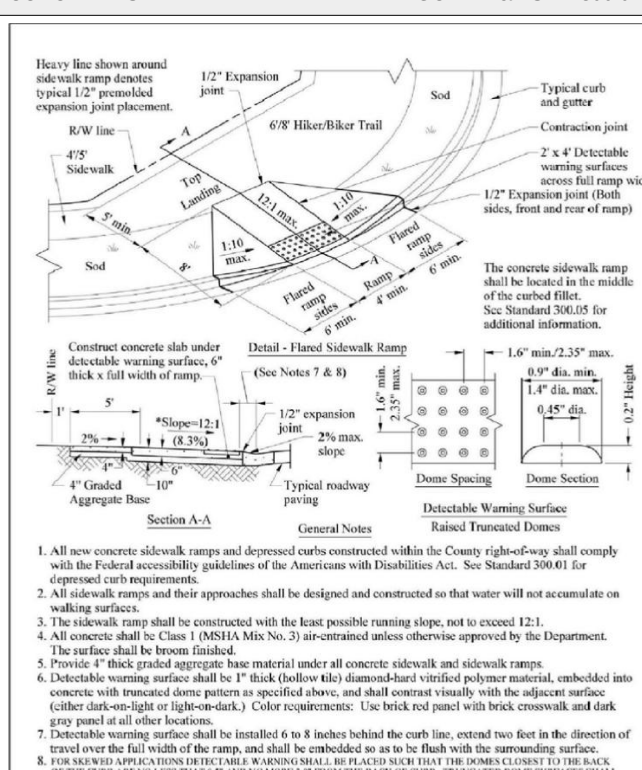

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DESIGNED BY	APPROVED BY	Concrete Sidewalk Ramp Type "A"
300.07		

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.



design, build, deliver

PROJECT

ESTATES AT INDIAN HEAD — LOTS 1-6

ADDRESS

200.

Prince George's County, Maryland

ZONE

RR

SHEET
L-100 — Landscape and Tree Canopy Plan

SCALE

1" = 50'

STATUS

PRE

SHEET NO.

5 OF

COUR
EDGE

H: NAD93

16. NAV/D99 (feet)

1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 2679, 2680, 26

PLAN TYPE AND PREPARATION

REVISIONS

INDEX OF DRAWINGS

SITE ANALYSIS

BUILDING DATA

DRAINAGE AREA COMPUTATIONS

Peak flows are summed for catchments; Q in cfs. WQV is the required water-quality volume

SEQUENCE OF CONSTRUCTION

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTHS OF ALL UTILITIES PRIOR TO BEGINNING CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PG CODE SEC. 32-106.
3. DISPOSED GRADE SHOWN SOLID, EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. EXISTING EARTHWORK IS THE RECORDED PLAT OF SUBDIVISION - LOTS 1, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808,

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

REVISIONS

— none —

TREE CANOPY SCHEDULE

Sec. 25-128 Table 1 as amended by CB-021-2024 — 20% of NET tract area on RSF-95, met within it. Per-lot planting per Landscape Manual Sec. 4.1(c)(1). Street trees in the right-of-way count toward canopy under Sec. 25-129.

TEN-YEAR CANOPY IS CREDITED PER SPECIES FROM THE PRINCE GEORGE'S COUNTY LANDSCAPE MANUAL. NO SPECIES HAS BEEN SELECTED ON THIS SET, SO THE CANOPY PROVIDED IS NOT ESTABLISHED AND THE SCHEDULE IS NOT YET BALANCED. EXISTING TREES PRESERVED ALSO COUNT

REQUIREMENT: A WAIVER OF THE CANOPY REQUIREMENT IS AVAILABLE UNDER SSC 25-130.

THE CANOPY REQUIREMENT MUST BE MET ON-SITE UNLESS A VARIANCE IS APPROVED, AND WHERE A GRADING PERMIT IS THE ONLY APPLICATION THE CANOPY NOTES BELONG ON THE GRADING PLAN — ENVIRONMENTAL TECHNICAL MANUAL, PART D, SEC. 3.0

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

GRAPHIC SCALE — 1" = 50'

