



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
1 OF 5
COORDINATES
EPSG 2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-100 — Existing Conditions and Boundary Plan
DISCIPLINE Maryland Licensed Surveyor
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG 2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 56,177 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab · B: basement · FF: finished floor · SF: subfloor · HT: height · STY: story(s). A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.9%	0.77	1.15	0.38	343
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,004

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE; THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.


SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

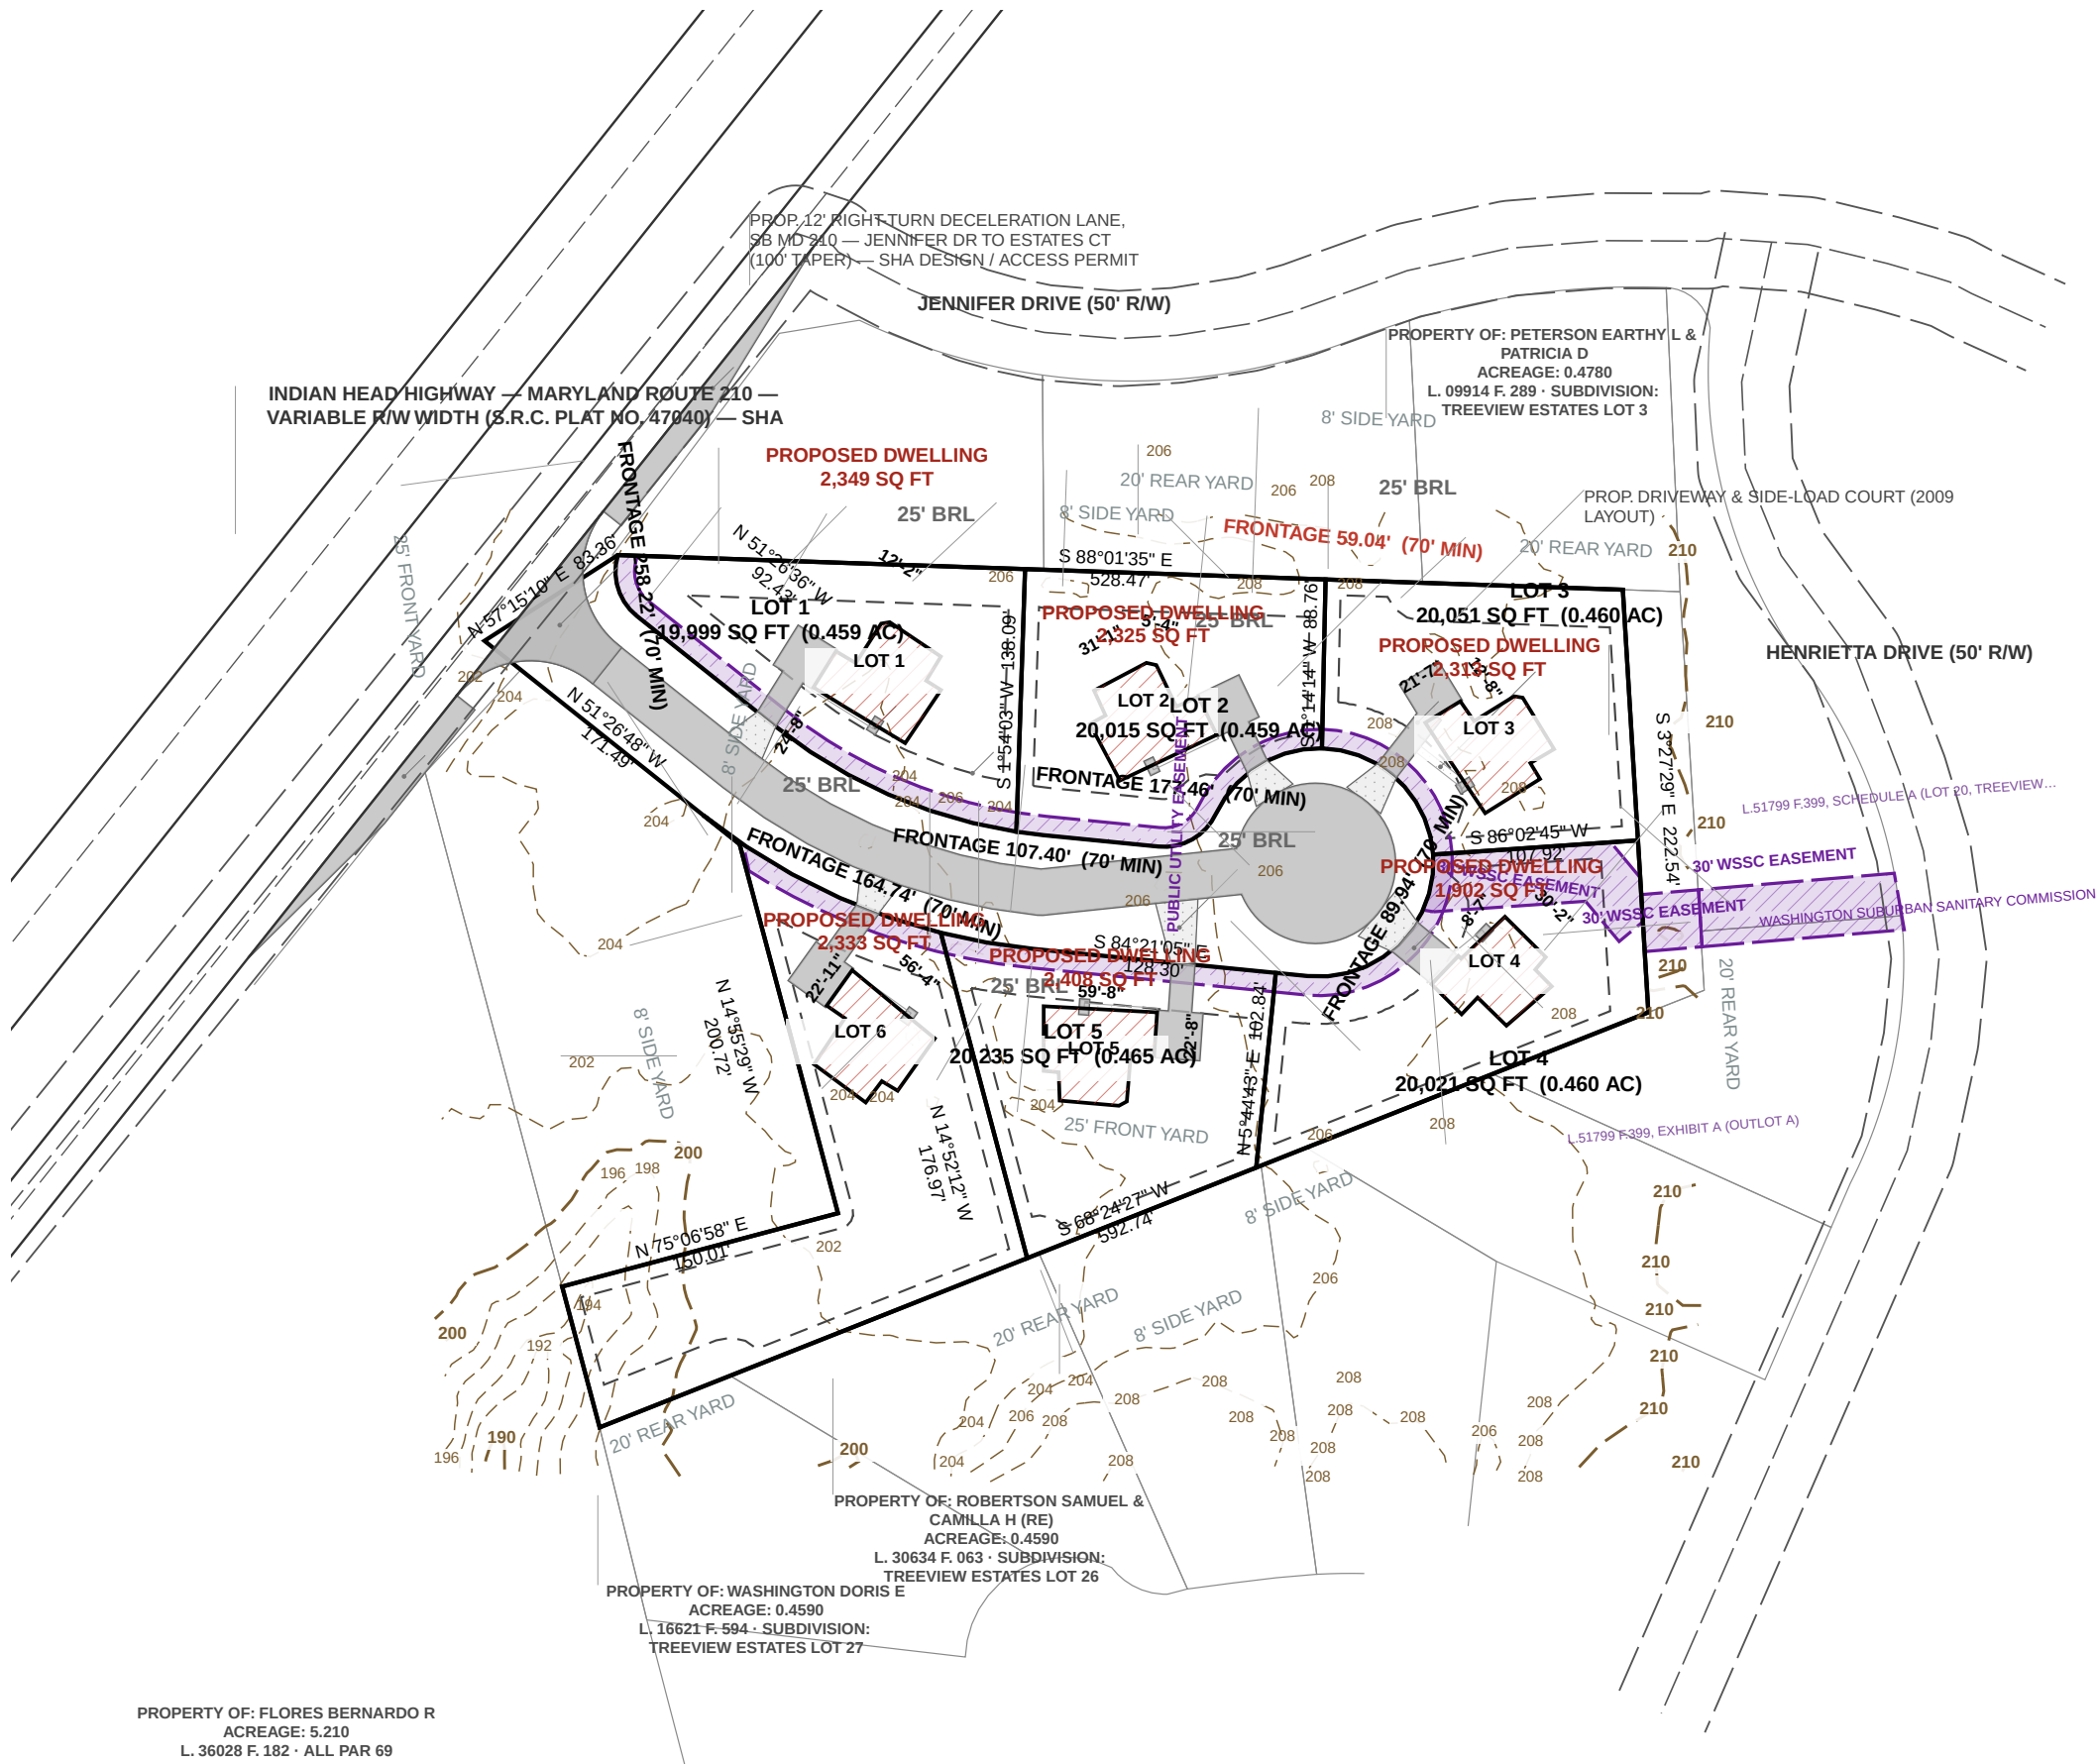


SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	.37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	.43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

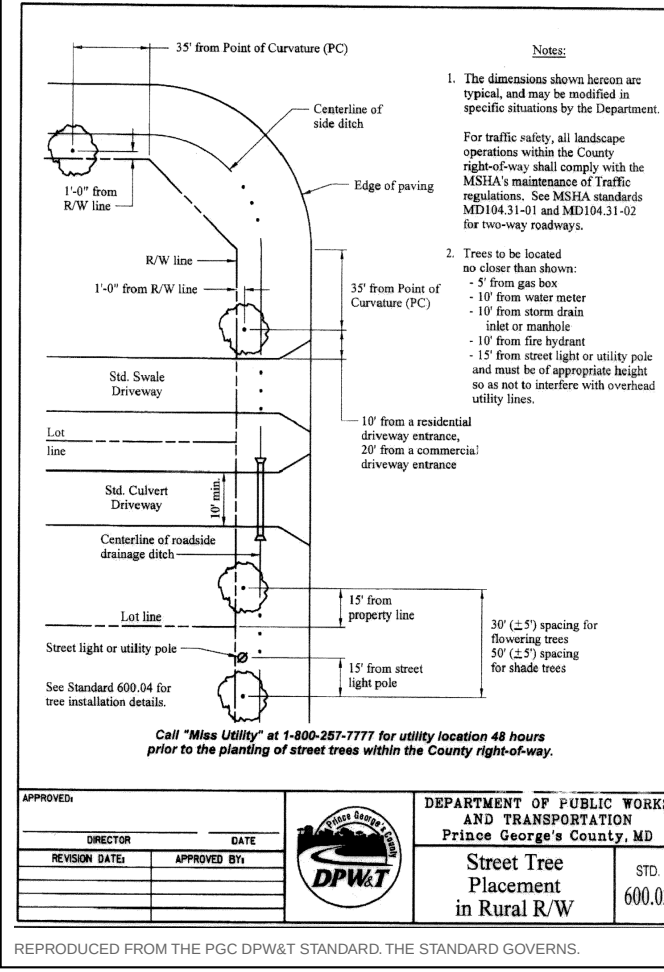

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

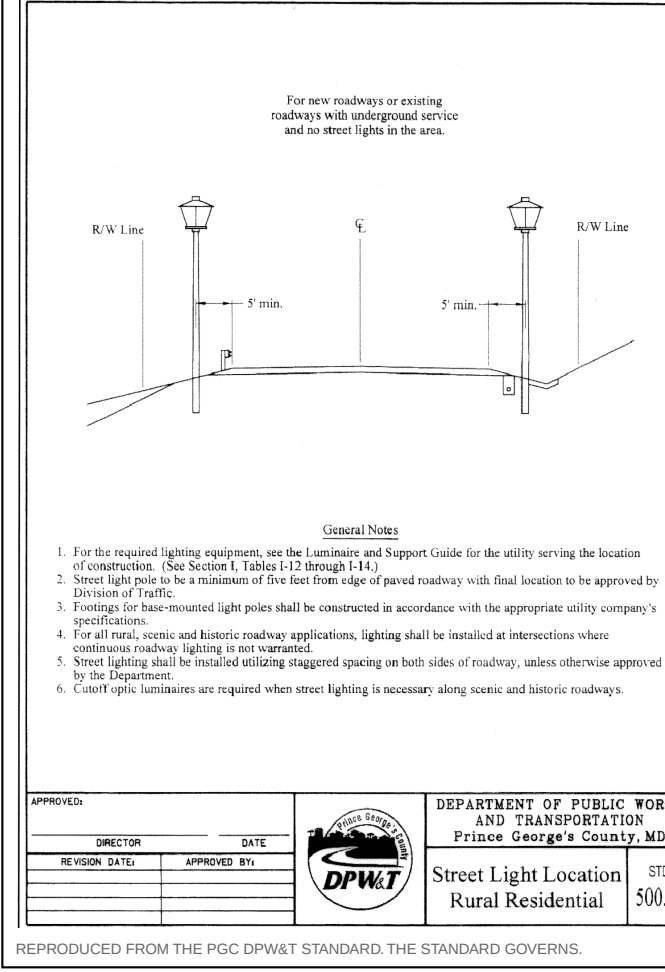

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

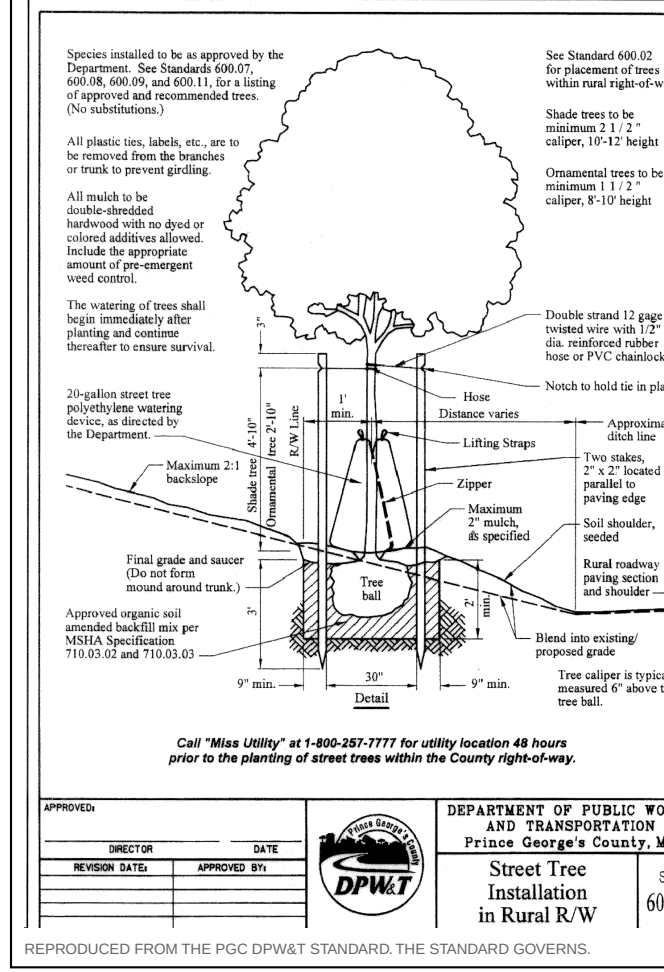



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG 2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG 2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 56,177 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab - B: basement - FF: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.9%	0.77	1.15	0.38	343
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,004

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES


- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE; THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION; NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


REQUIRED NOTES: DO NOT FIT THIS SHEET; GRADING CERTIFICATE; STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE. THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

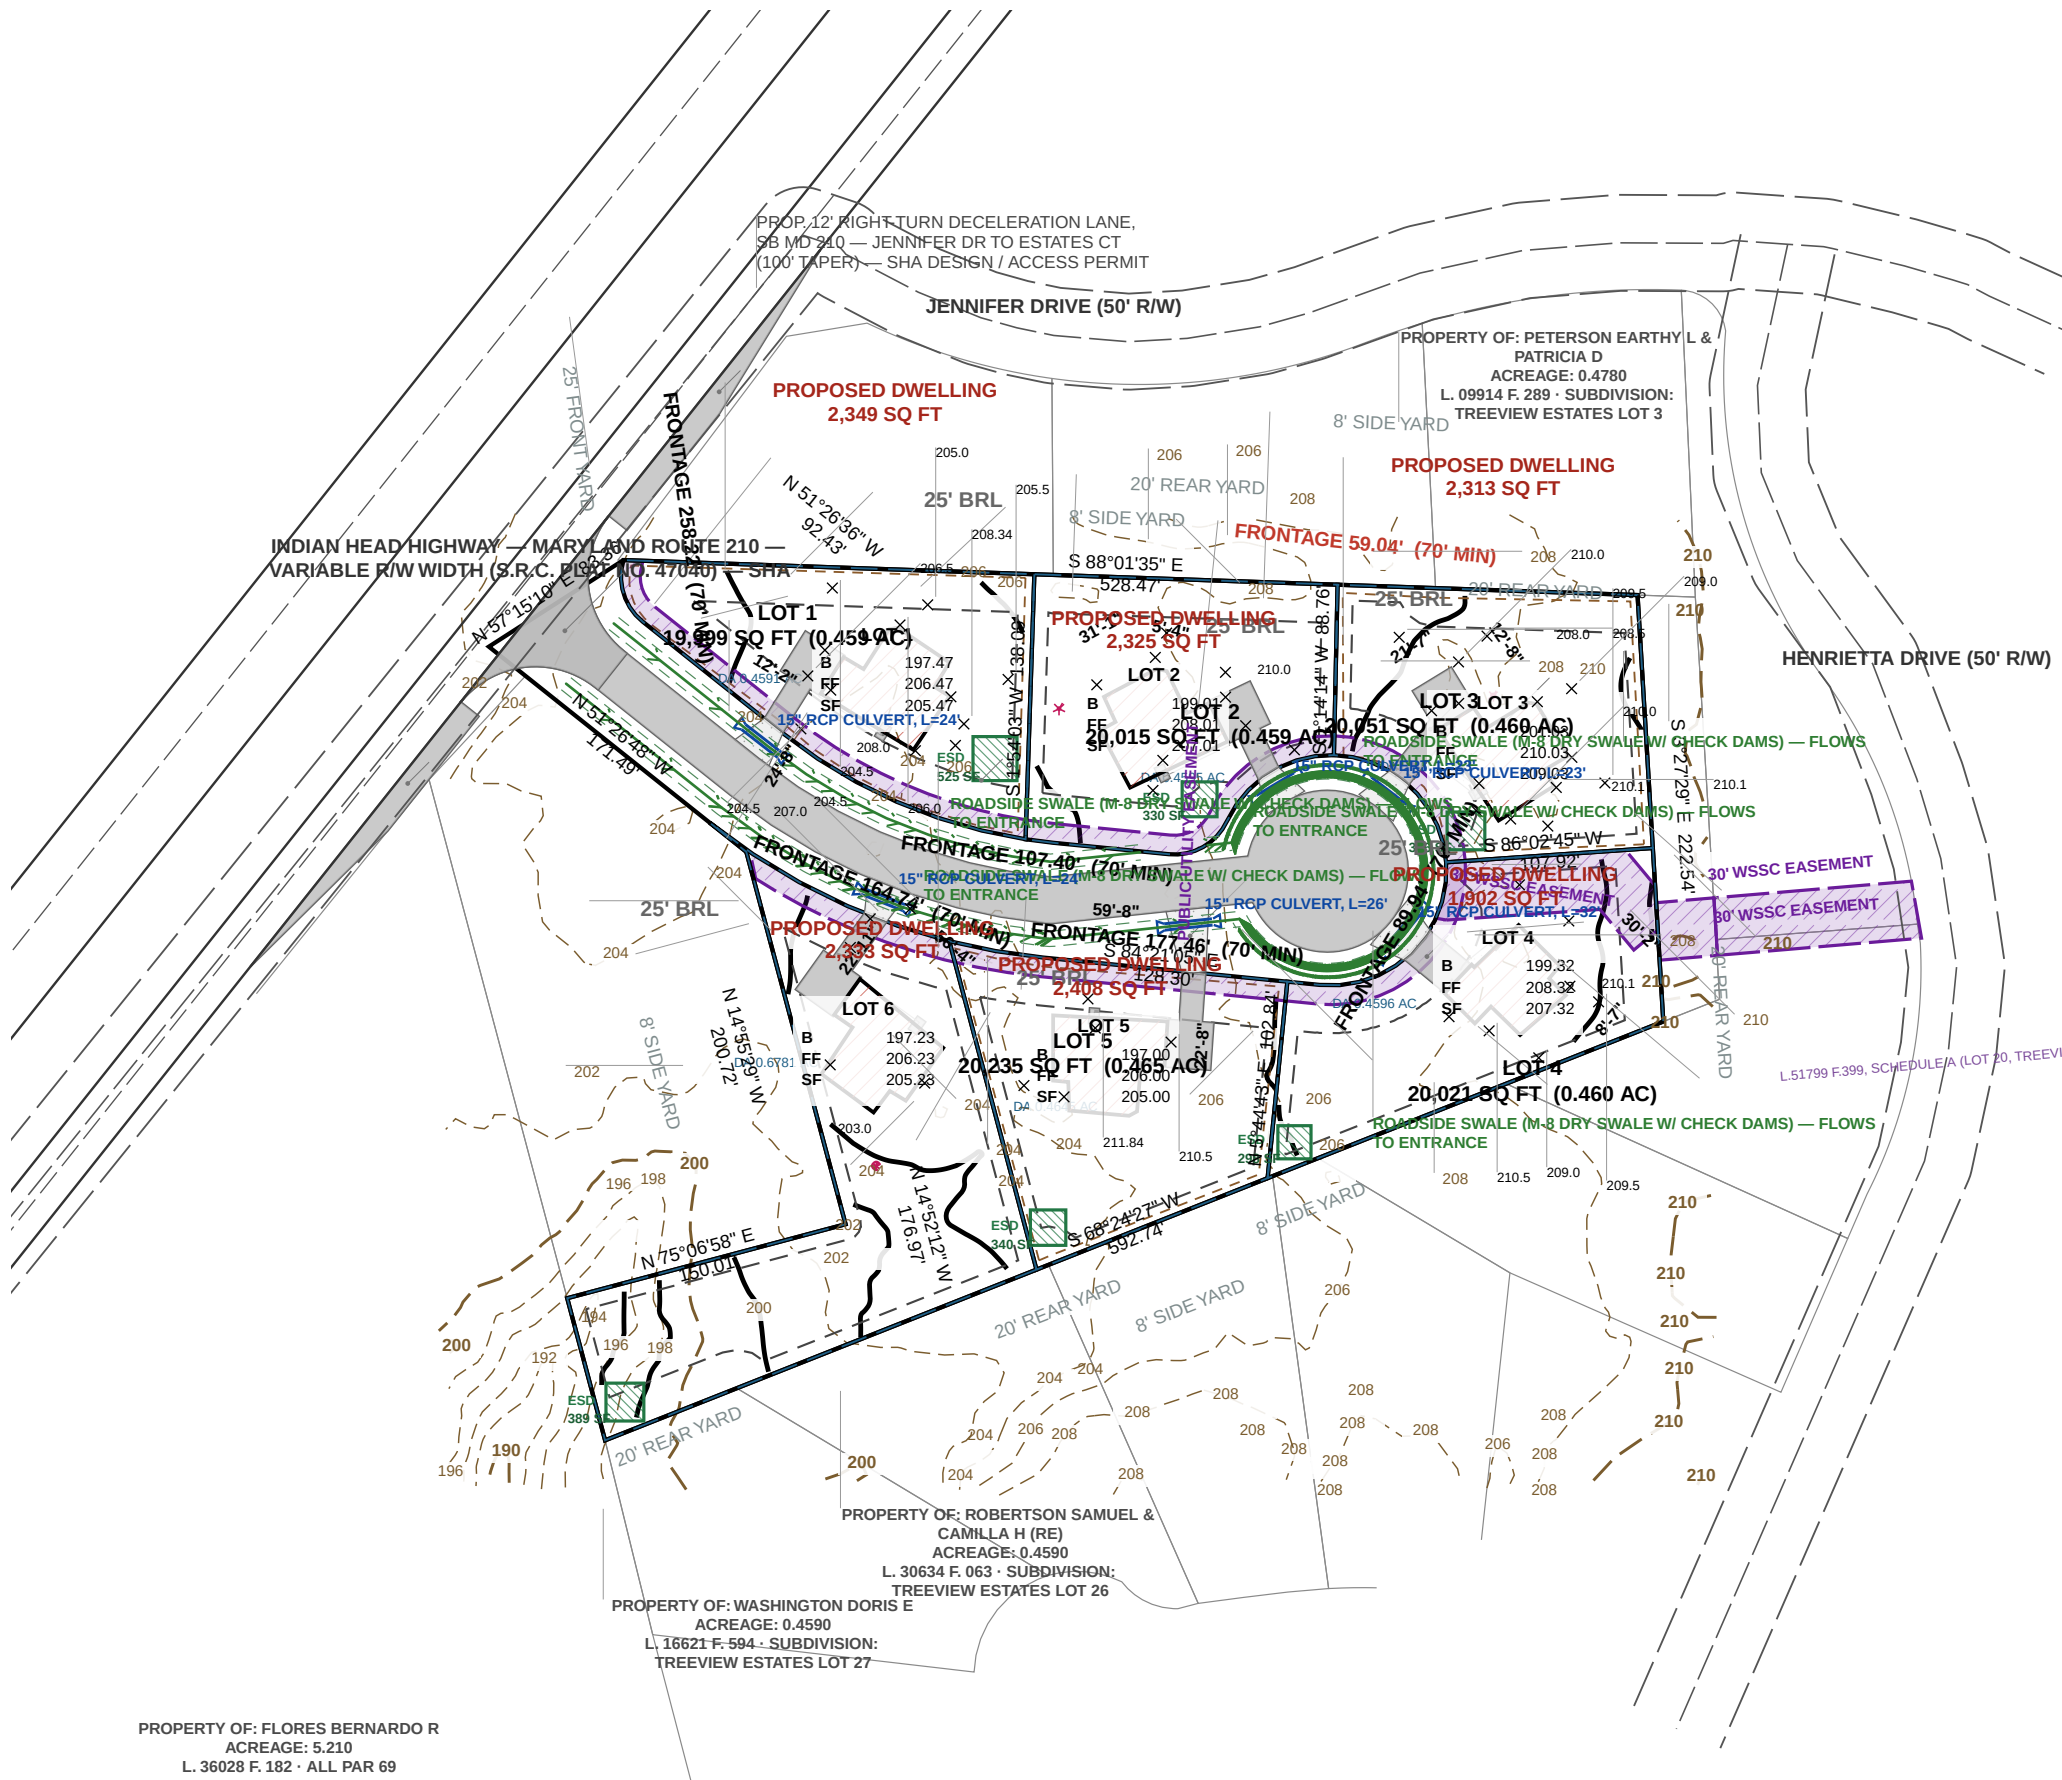


SOILS STABLE USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	.37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	.43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

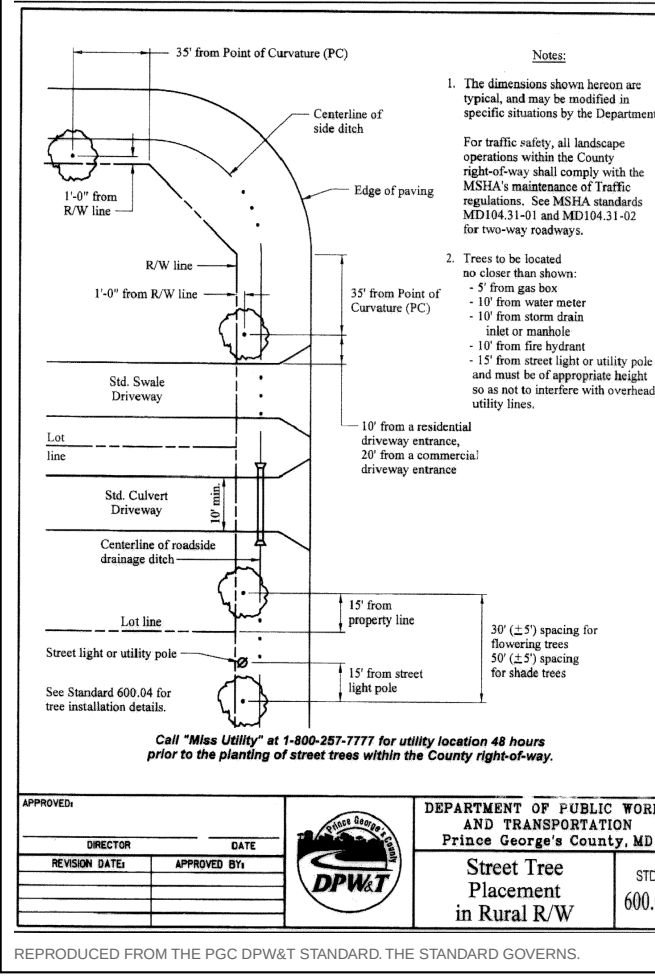

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

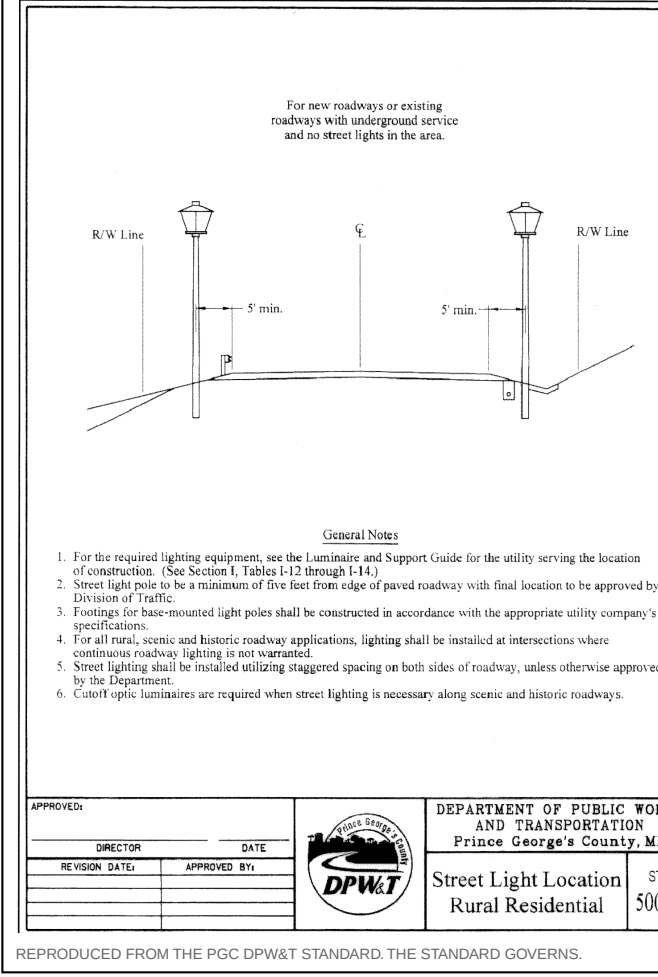

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

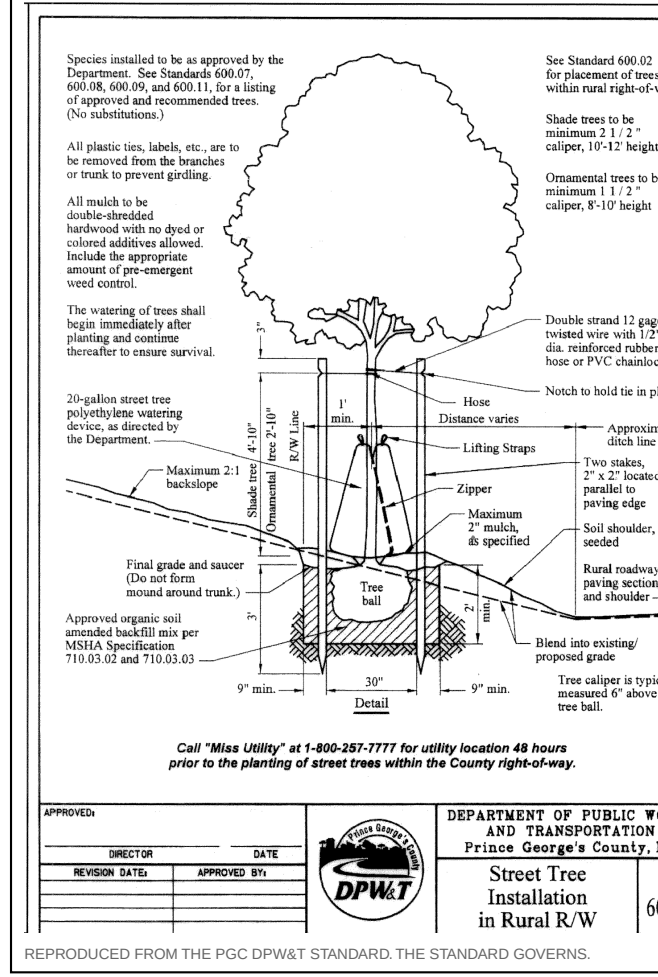



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-500 — Utility Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
3 OF 5
COORDINATES
EPSG 2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-500 — Utility Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG 2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 56,177 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-17a(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab - B: basement - FF: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.3%	0.77	1.15	0.38	343
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,004

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE; THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01 NOTE 6 ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.


SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

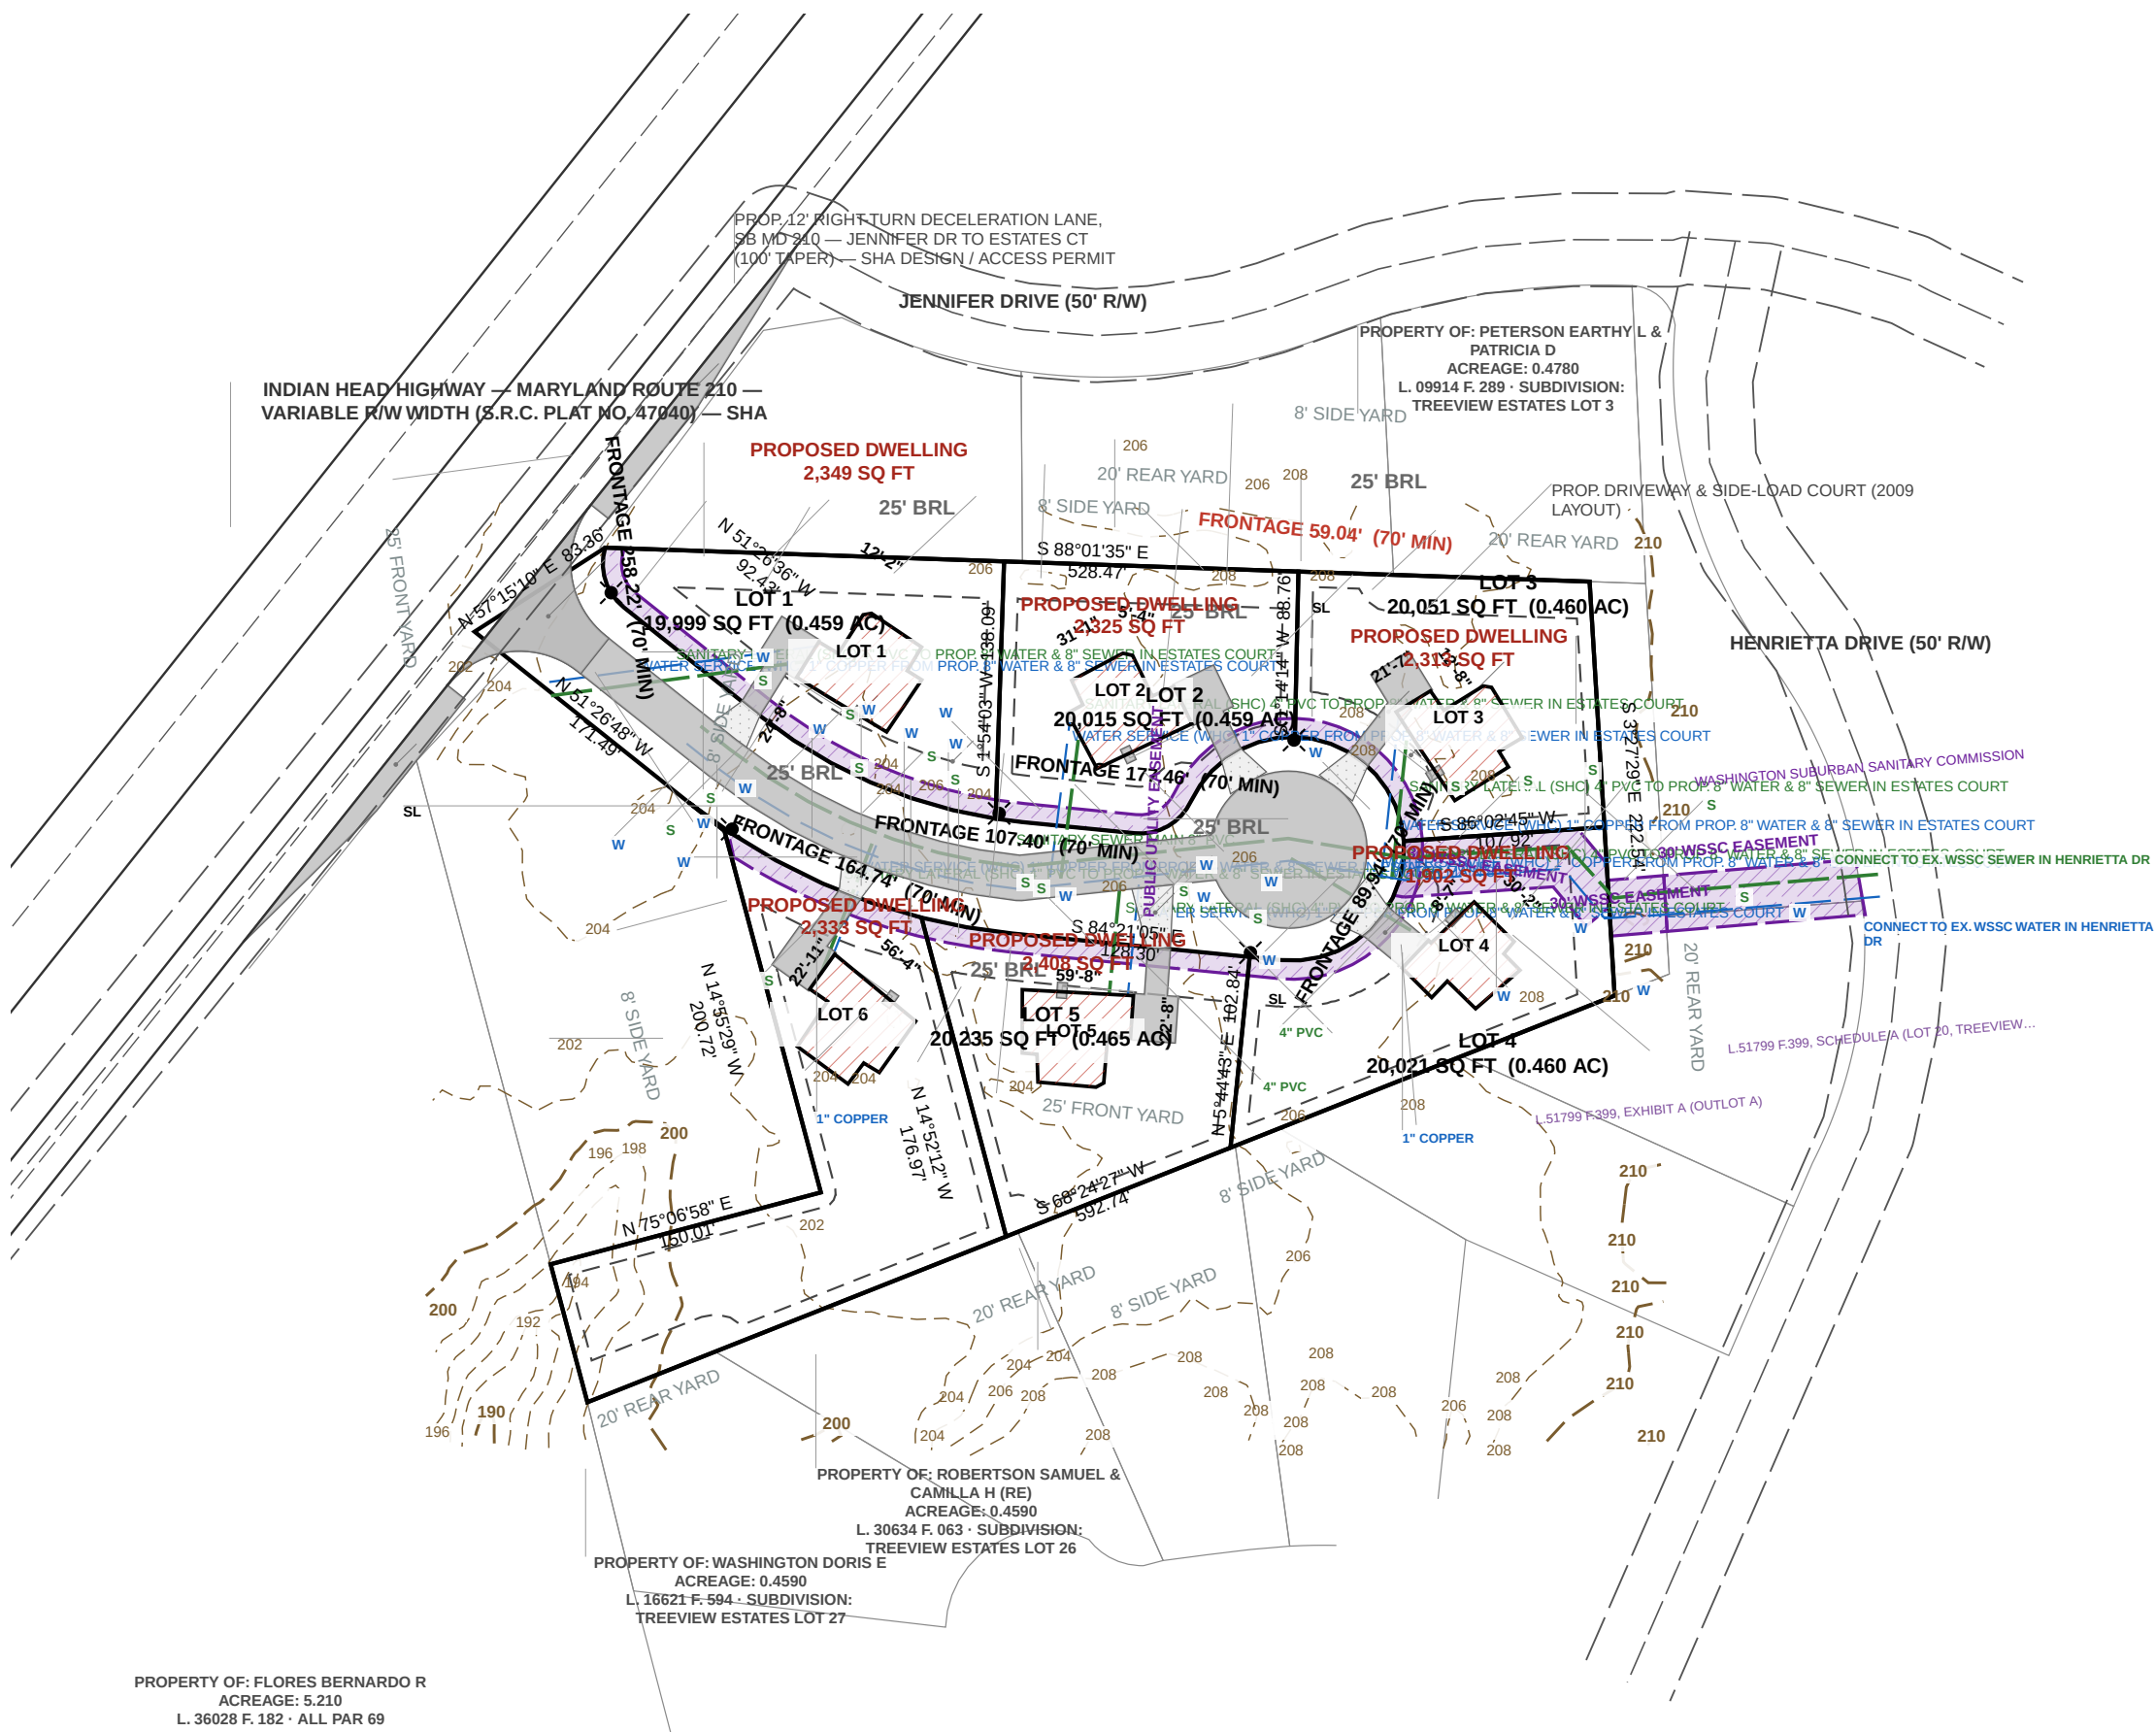


SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	.37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	.43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

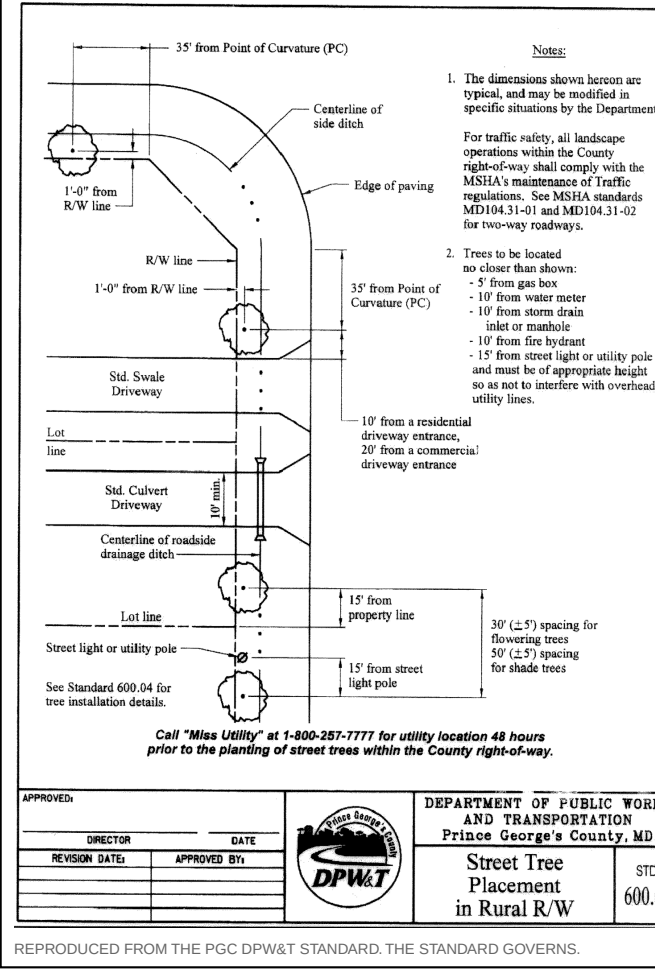

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

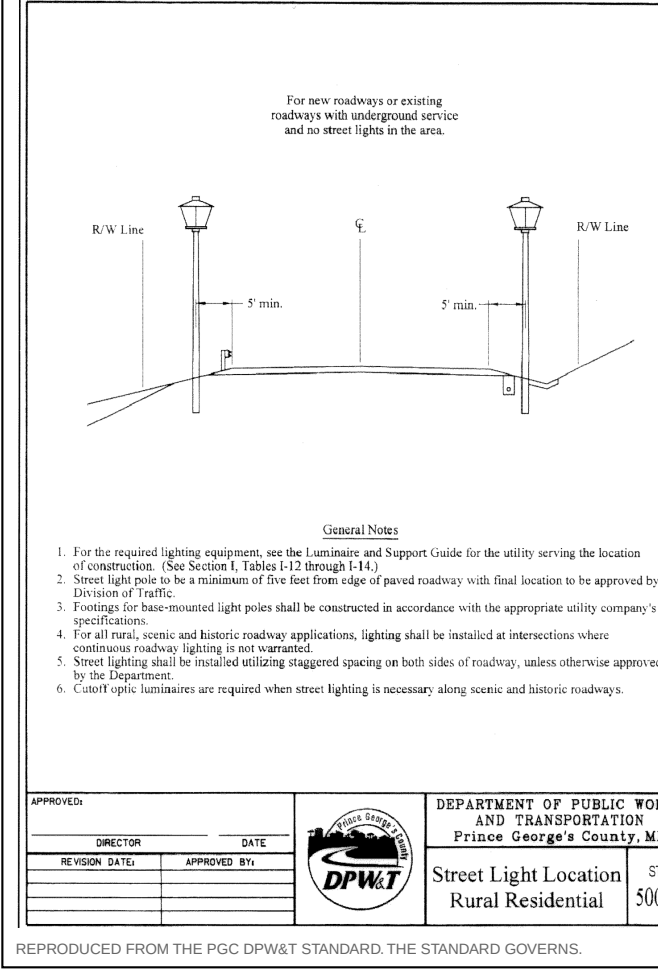

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

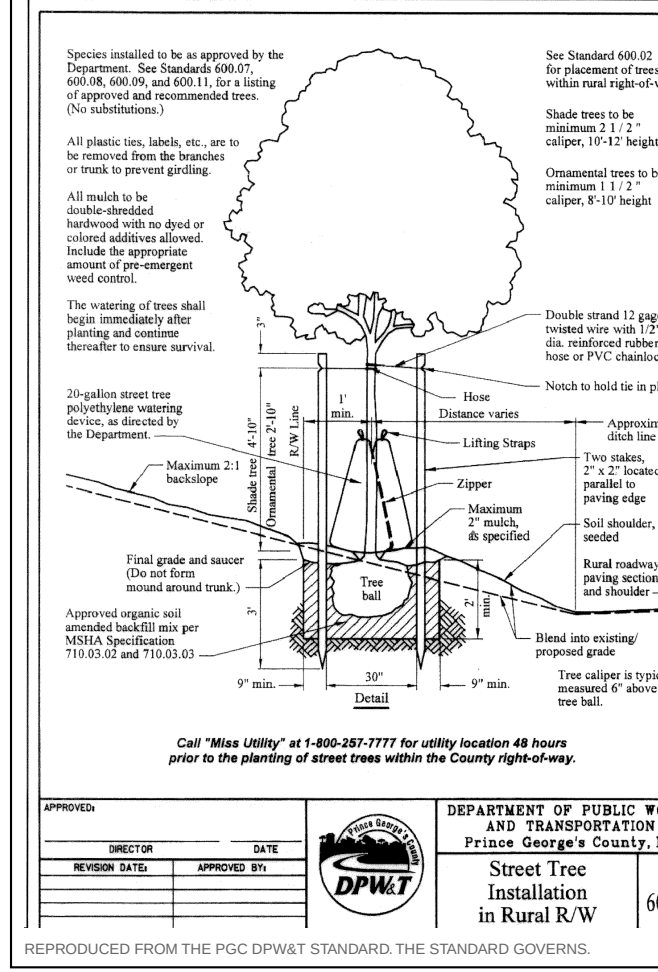



design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
SUBDIVISION
Prince George's County, Maryland
ZONE
RR
SHEET
C-700 — Sediment and Erosion Control Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLANT TYPE	SITE DEVELOPMENT
------------	------------------

SHEET	C-700 — Sediment and Erosion Control Plan
DISCIPLINE	Maryland Professional Engineer
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

NO	DATE
----	------

[illegible]

1	C-100	Existing Condition
---	-------	--------------------

- | | | |
|---|-------|---------------------------------------|
| 1 | C-100 | Existing Conditions and Boundary Plan |
| 2 | C-400 | Grading and Drainage Plan |
| 3 | C-500 | Utility Plan |
| 4 | C-700 | Sediment and Erosion Control Plan |
| 5 | L-100 | Landscape and Tree Canopy Plan |

ZONE

TAX / PARCEL ID	—	
GROSS TRACT AREA	166,902 SF	3,809 AC
LOT 1 AREA	19,999 SF	0.459 AC
LOT 2 AREA	20,021 SF	0.460 AC
LOT 3 AREA	20,051 SF	0.460 AC
LOT 4 AREA	20,021 SF	0.460 AC
LOT 5 AREA	20,238 SF	0.465 AC
LOT 6 AREA	29,538 SF	0.678 AC
NET AREA	128,817 SF	2,981 AC
LOT 1 FRONTAGE	70 MIN	258.22'
LOT 2 FRONTAGE	70 MIN	107.40'
LOT 3 FRONTAGE	70 MIN	59.04'
LOT 4 FRONTAGE	70 MIN	89.94'
LOT 5 FRONTAGE	70 MIN	177.46'
LOT 6 FRONTAGE	70 MIN	164.74'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	5'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	25%	10.5%
BUILDING FOOTPRINT	—	13,629 SF
DATUM		
HORIZONTAL	EP5G-2248	NAD83
VERTICAL	NAVD88 (feet)	

1. Gross tract area

- | | |
|-------------------------------------|---------------------------------------|
| 2. Area of dwelling | 13,629 SF |
| 3. Wooded area | NOT ESTABLISHED |
| 4. Floodplain area | NOT ESTABLISHED |
| 5. Net lot area | 129,857 SF |
| 6. TOTAL AREA DISTURBED | 56,177 SF (AT LEAST) |
| 7. SWM REQUIRED — Sec. 32-174(a)(3) | YES — DISTURBANCE
EXCEEDS 5,000 SF |

LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab · B basement · FF finished floor · SF subfloor · HT height · STY storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

CATCHMENT

LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.6%	0.77	1.13	0.36	332
LOT 3	20,051	17.3%	0.77	1.15	0.38	343
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376

Peak flows are summed lot catchments; Q in cfs. WQv is the required water-quality volume

1. Pre-construction meeting

2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

1. CONTRACTOR SHALL


- [illegible]

I HEREBY CERTIFY THAT THESE DOCUMENTS

ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.




_____ SIGNATURE	_____ DATE
_____ LICENSE NO.	_____ EXPIRATION DATE

2 REQUIRED NOTE(S) DO NOT FIT THIS SHEET: STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE. THEY ARE REQUIRED AND

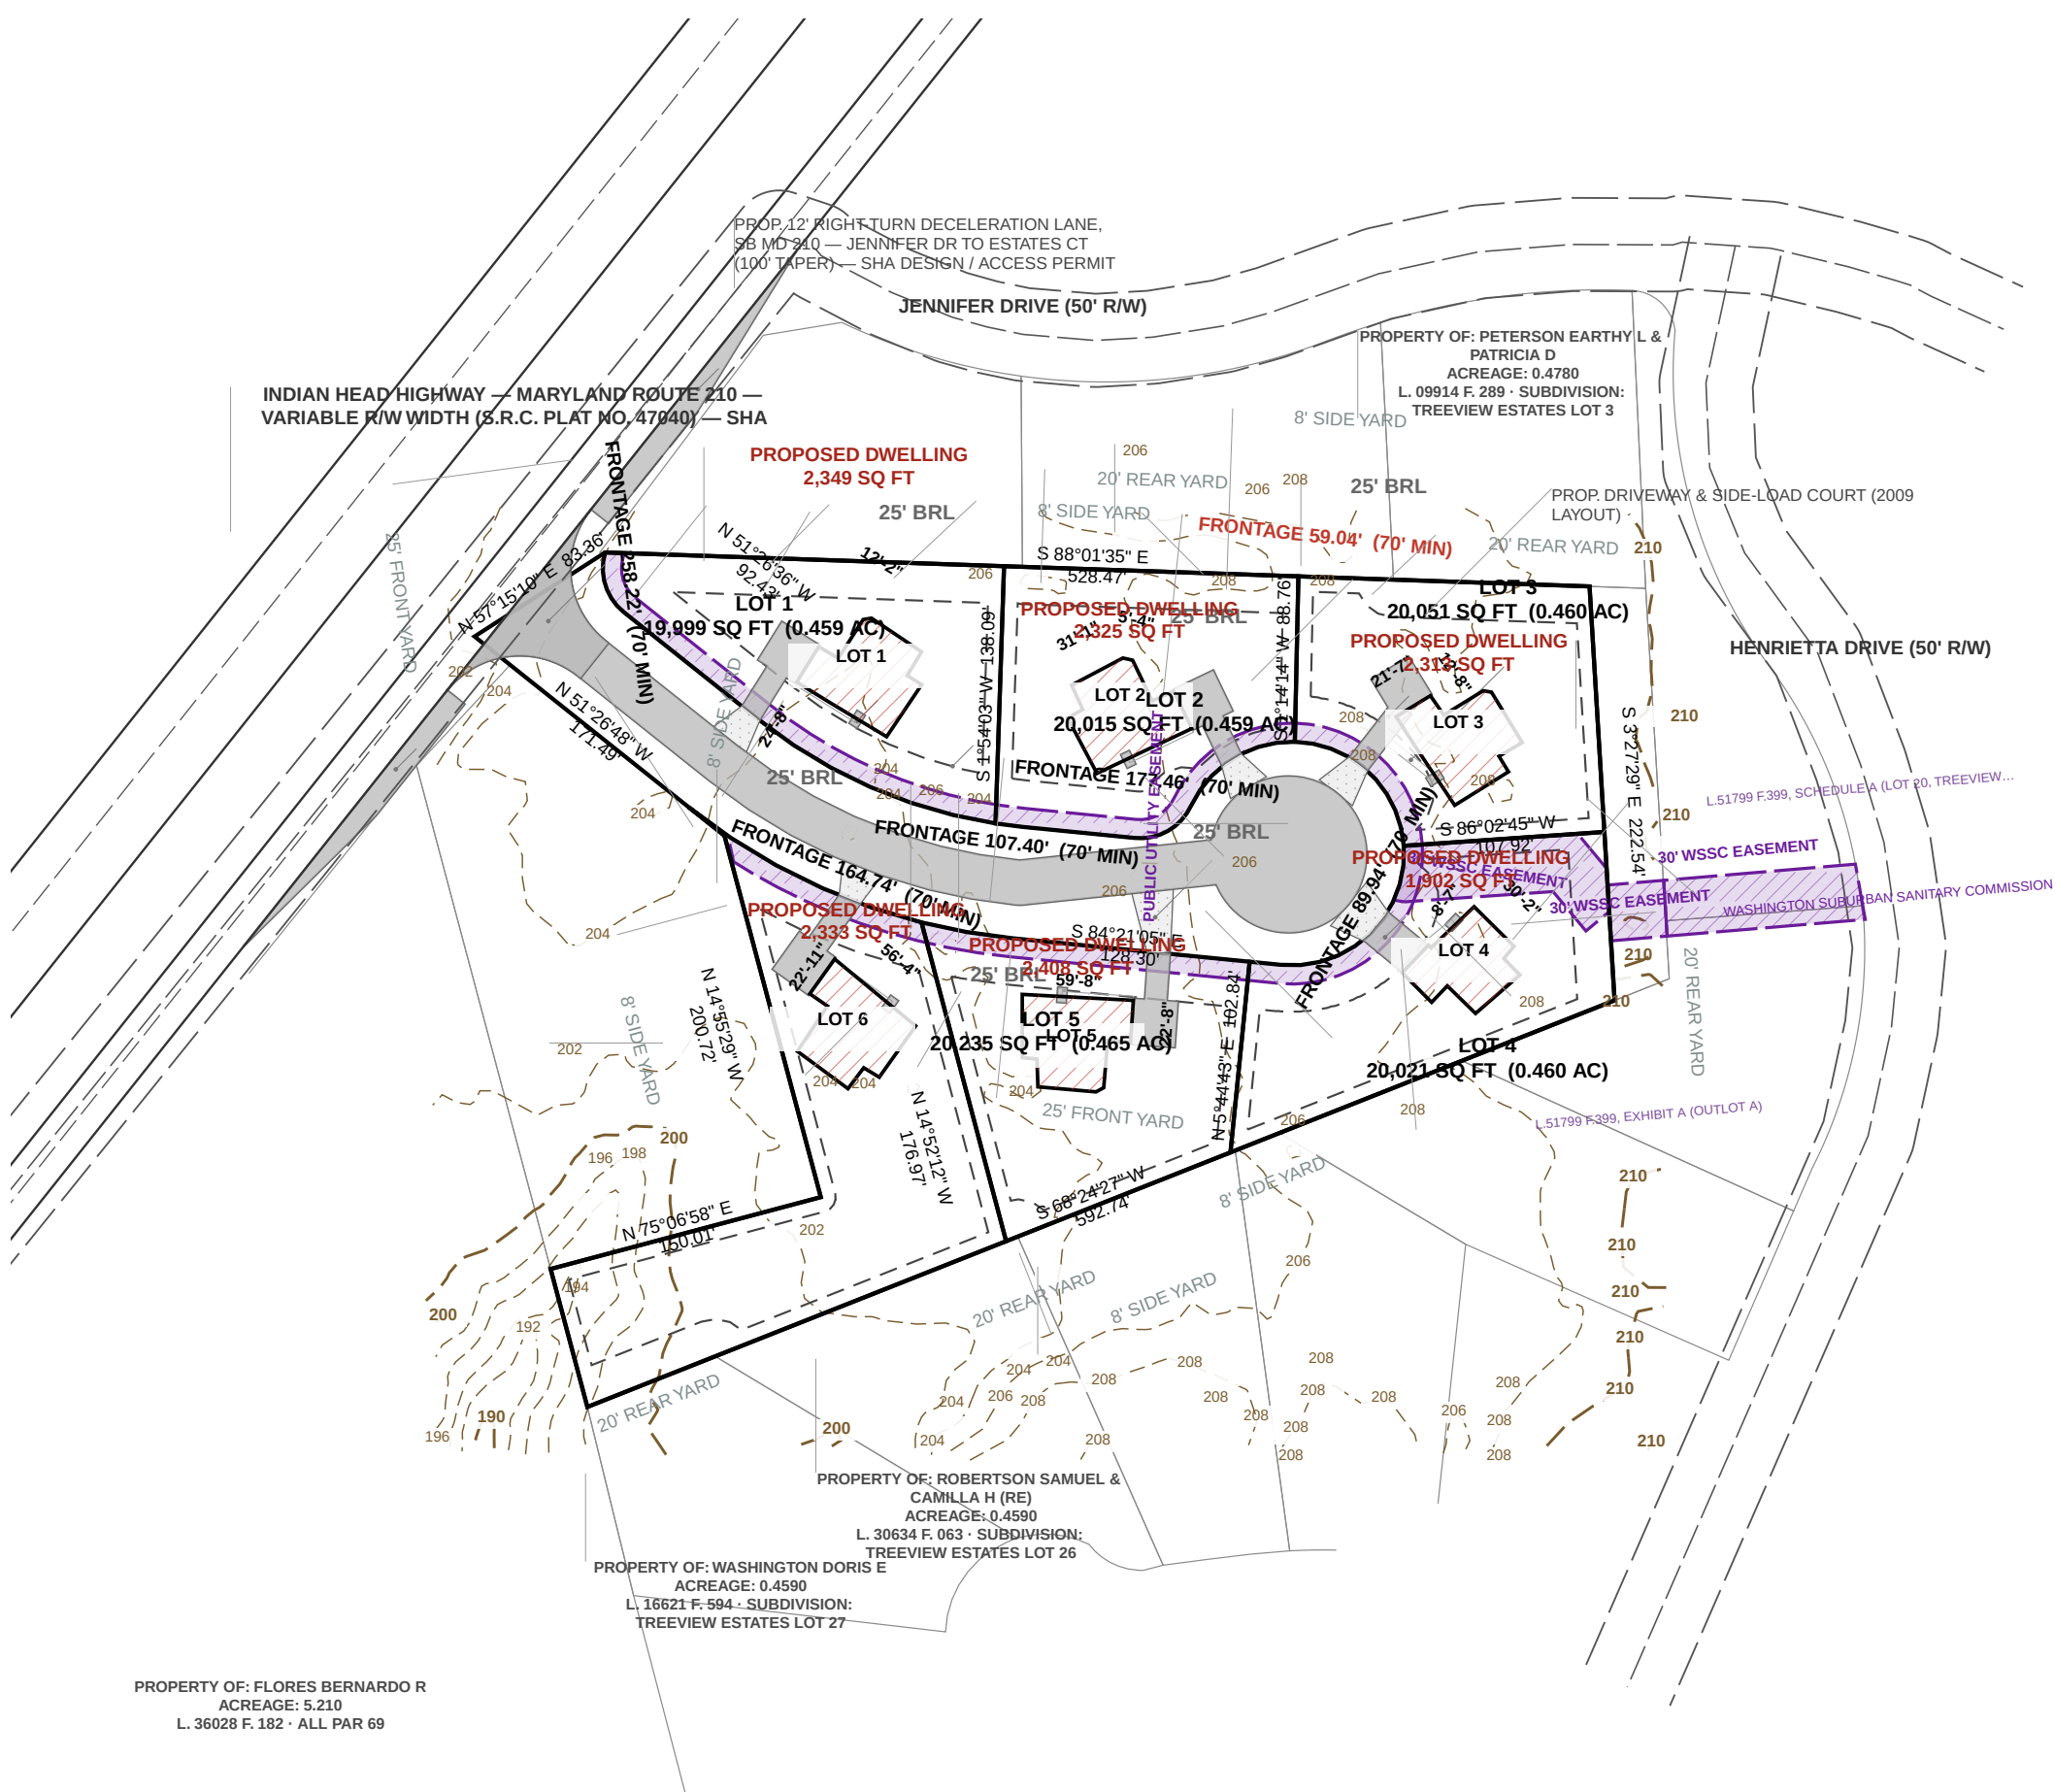

MAR UNIT	MAR UNIT NAME
----------	---------------

RAF UNIT	RAF UNIT TYPE	KFAC	HYDRA	R/D GRP	DRAINAGE CATEG.
AaB	Adelphia Soil loam, 2 to 5 percent slopes complex	37.2	No	D	Moderately well drained
AcA	Adelphia-Ascasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

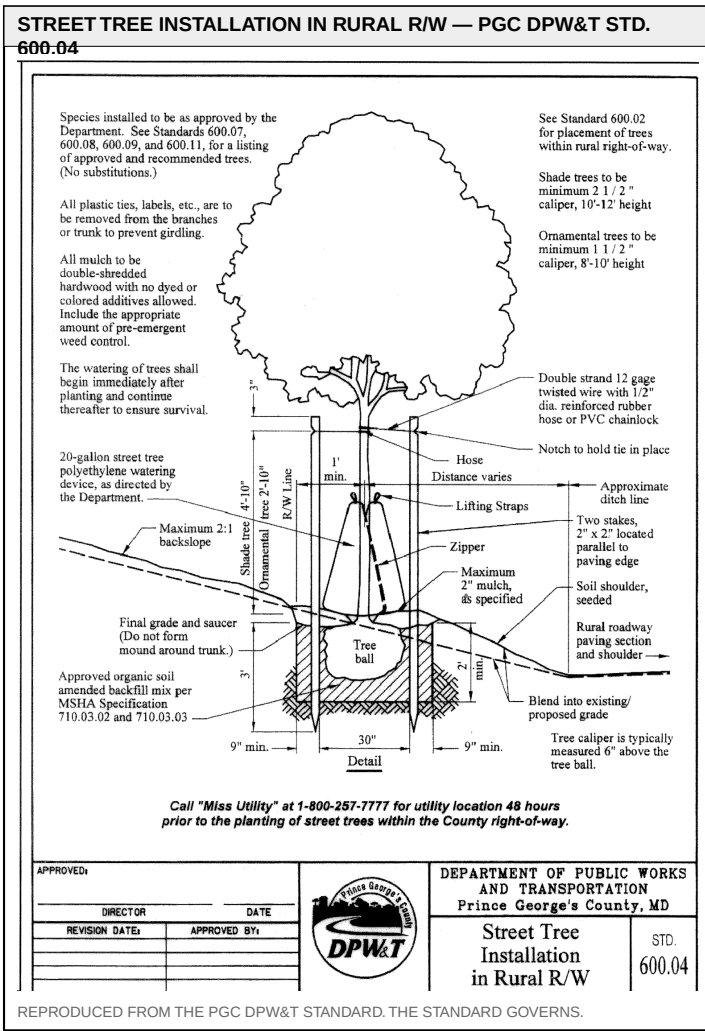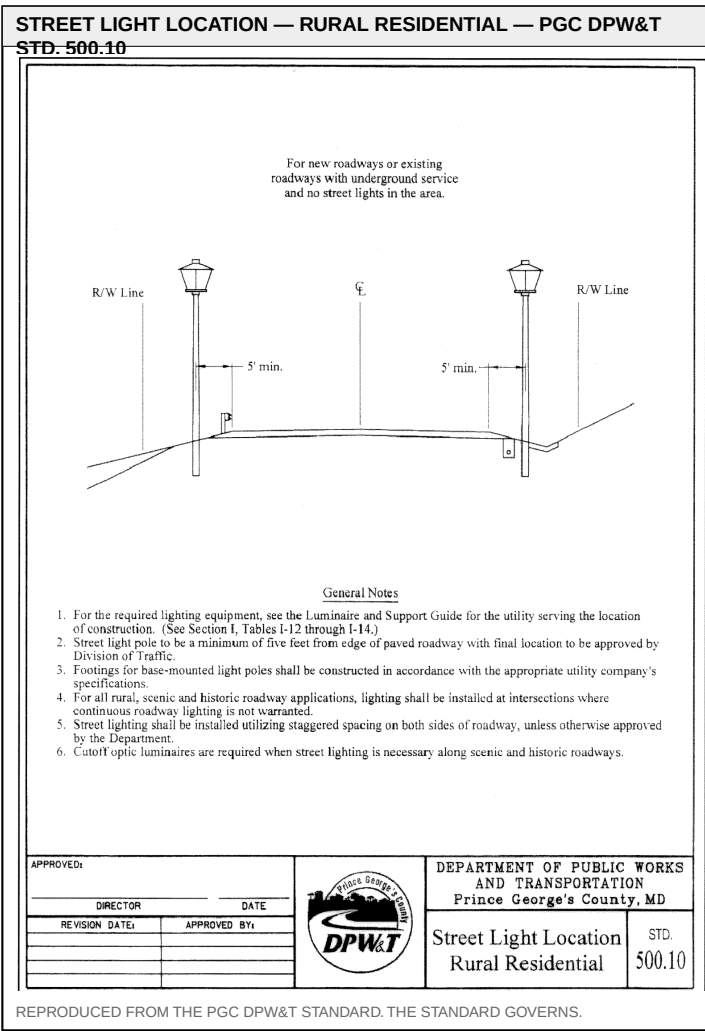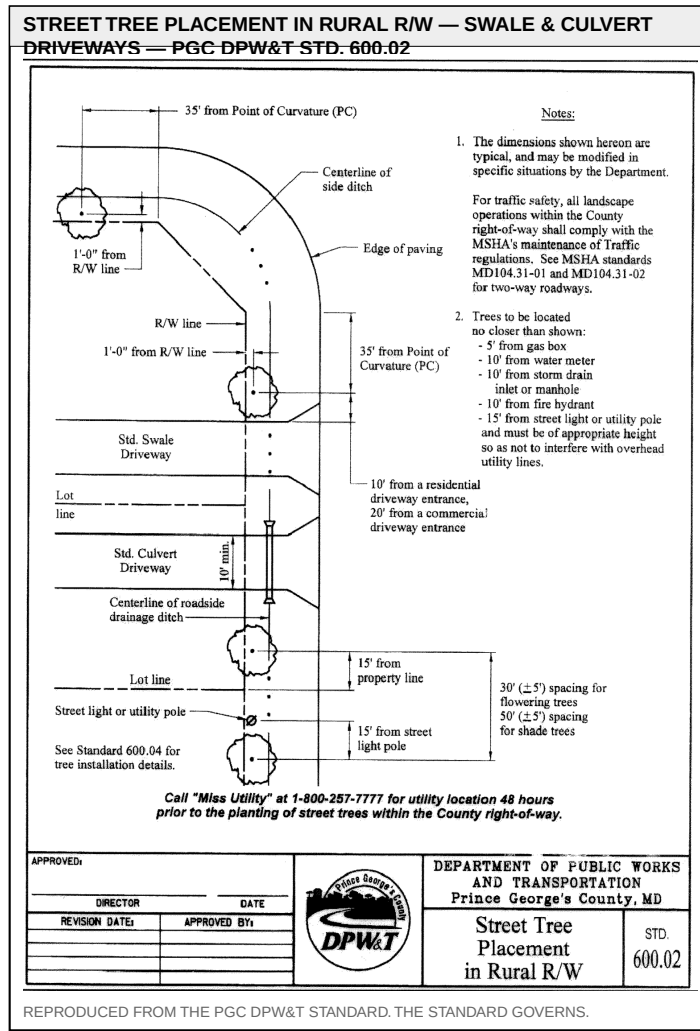



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
5 OF 5
COORDINATES
EPSG 2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.94'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG 2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 56,177 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab - B: basement - FF: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.2%	0.77	1.15	0.38	343
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,004

Peak flows are summed lot catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 1 DAY
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE; THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION; NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01 NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

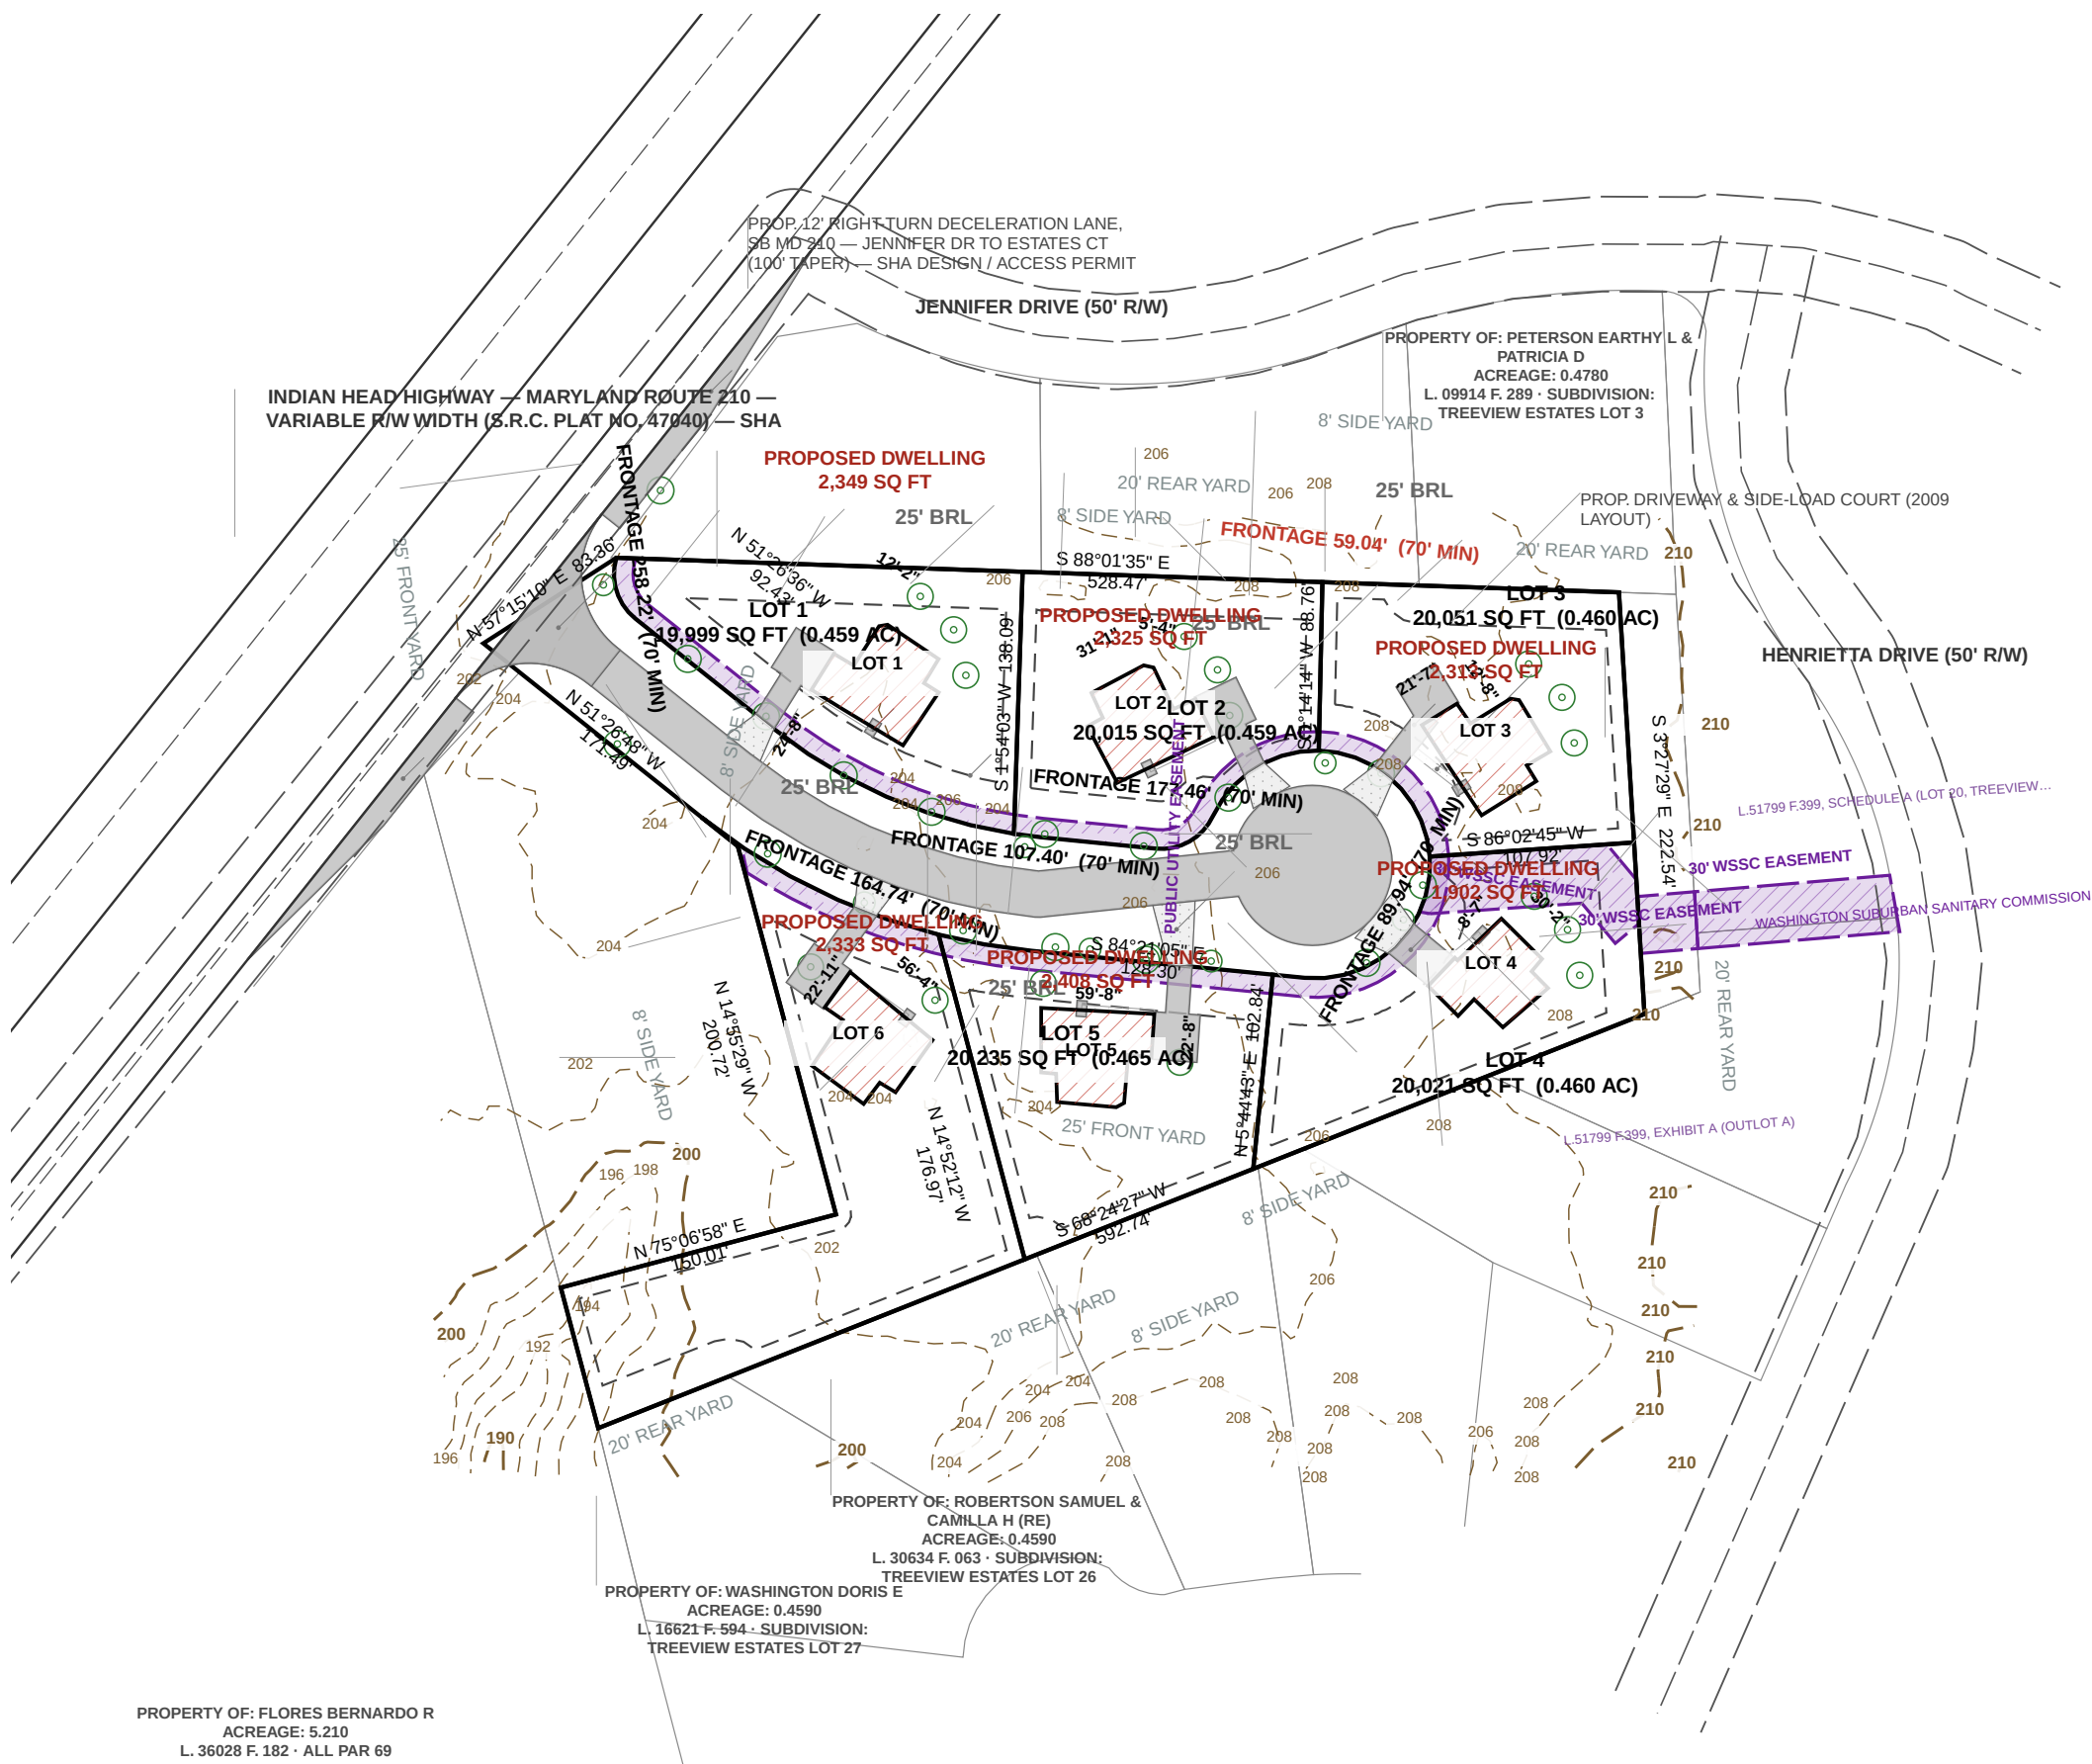

TREE CANOPY SCHEDULE

Sec. 25-128 Table 1 as amended by CB-021-2024 — 20% of NET tract area on RSP-95, met within 8' Per-lot planting per Landscape Manual Sec. 4.1(i)(1). Street trees in the right-of-way count toward canopy under Sec. 25-129.


LOT	NET AREA SF	CANOPY REQ 20% SF	SHADE PROV / REQ	ORN-EVON PROV / REQ	STREET TREES	10-YR CANOPY PROVIDED
LOT 1	19,999	4,000	3 / 3	0 / 2 SHORT	1	NOT ESTABLISHED
LOT 2	20,015	4,003	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 3	20,051	4,010	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 4	20,021	4,004	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 5	20,235	4,047	2 / 4 SHORT	0 / 3 SHORT	3	NOT ESTABLISHED
LOT 6	29,536	5,907	2 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
TOTAL	129,857	25,971	16 / 23	0 / 17	24	

TEN-YEAR CANOPY IS CREDITED PER SPECIES FROM THE PRINCE GEORGE'S COUNTY LANDSCAPE MANUAL; NO SPECIES HAS BEEN SELECTED ON THIS SET, SO THE CANOPY PROVIDED IS NOT ESTABLISHED AND THE SCHEDULE IS NOT YET BALANCED; EXISTING TREES PRESERVED ALSO COUNT.


NO TREE IS PLANTED WITHIN A STORM DRAIN EASEMENT; THE 60 FT 5455 EASEMENT CARRIES THE 42 IN RCP MAN AND THE 10 FT REAR EASEMENT CARRIES THE DRAINAGE SWALE; BOTH ARE SHOWN ON THIS SHEET AND BOTH ARE EXCLUDED FROM PLANTABLE AREA.

A VARIANCE OF THE CANOPY REQUIREMENT IS AVAILABLE UNDER SEC. 25-130. PER LOT PLANTING IS SHORT ON EVERY LOT AS DRAWN; LANDSCAPE MANUAL, SEC. 4.1(i)(3) REQUIRES 4 MAJOR SHADE AND 3 ORNAMENTAL OR EVERGREEN TREES ON A LOT OF 20,000 SF OR MORE, AND 3 AND 2 ON A LOT OF 15,000 TO 19,999 SF; NO ORNAMENTAL OR EVERGREEN TREES ARE DRAWN; AT LEAST ONE SHADE TREE MUST STAND ON THE SOUTH OR WEST SIDE WITHIN 30 FT OF THE DWELLING, AND AT LEAST ONE REQUIRED TREE IN THE FRONT YARD; SPECIES AND FINAL LOCATIONS BY THE LANDSCAPE ARCHITECT. THE CANOPY REQUIREMENT MUST BE MET ON-SITE UNLESS A VARIANCE IS APPROVED, AND WHERE A GRADING PERMIT IS THE ONLY APPLICATION THE CANOPY NOTES BELONG ON THE GRADING PLAN — ENVIRONMENTAL/TECHNICAL, MANUAL PART D, SEC. 3.5.

STREET TREE PLACEMENT IN RURAL R/W — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

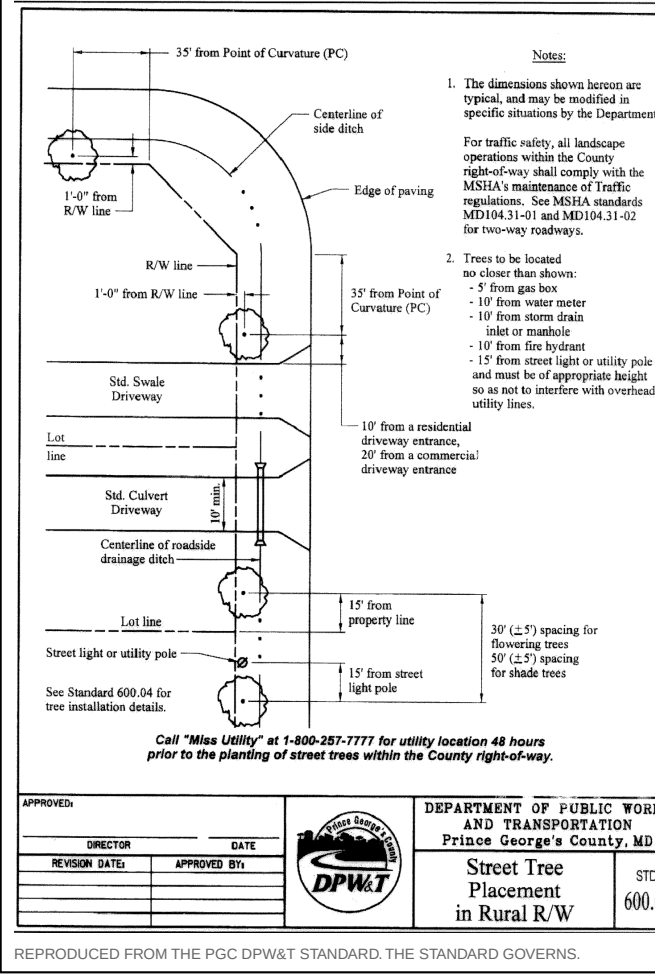

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 500.10

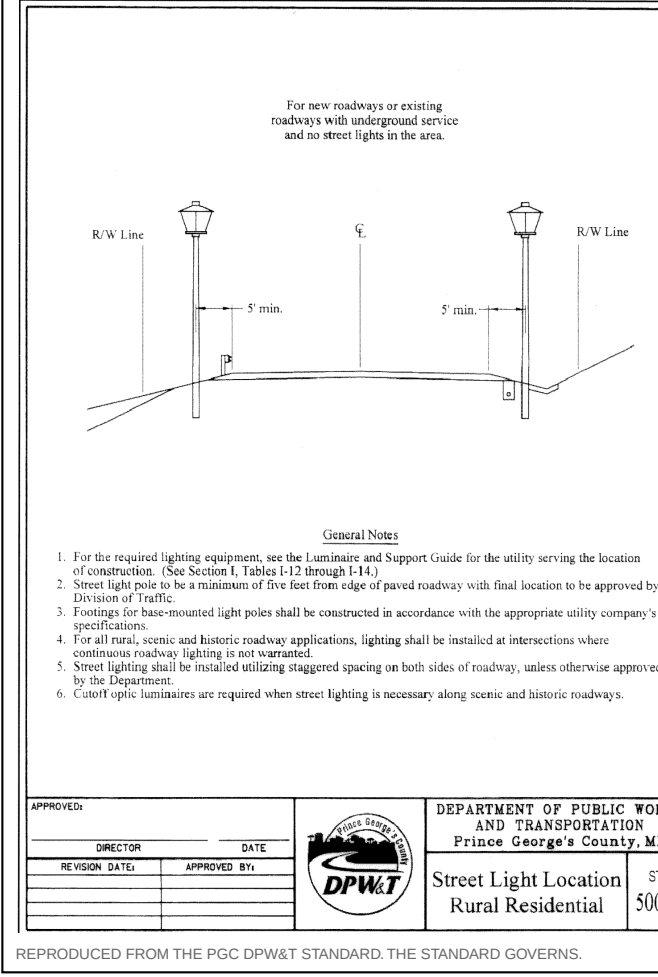

STREET TREE INSTALLATION IN RURAL R/W — PGC DPW&T STD. 600.04

