

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 10'
STATUS
PRELIMINARY
SHEET NO.
1 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION		
1. Pre-construction meeting		1 DAY
2. Obtain necessary permits		2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation		1 DAY
4. Construct stabilized construction entrance and perimeter sediment control		2 DAYS
5. Rough grade, construct dwelling, utilities and driveway		12 MONTHS
6. Fine grade and stabilize all disturbed areas		1 DAY
7. Remove sediment control devices when written permission has been granted		1 DAY
8. Final cleanup		1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS		

GENERAL NOTES		
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.		
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32.106.		
3. PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.		
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.		
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.		

LEGEND	
—	PROPERTY BOUNDARY
- - - - -	BRL — BUILDING RESTRICTION LINE
—	PROPOSED STRUCTURE
—	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- - - - -	STREET CENTRELINE
—	PROPOSED PAVEMENT — DRIVEWAY / WALK
- - - - -	EASEMENT



PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SECONDARY CONTROL, GRADING, SOIL & DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —

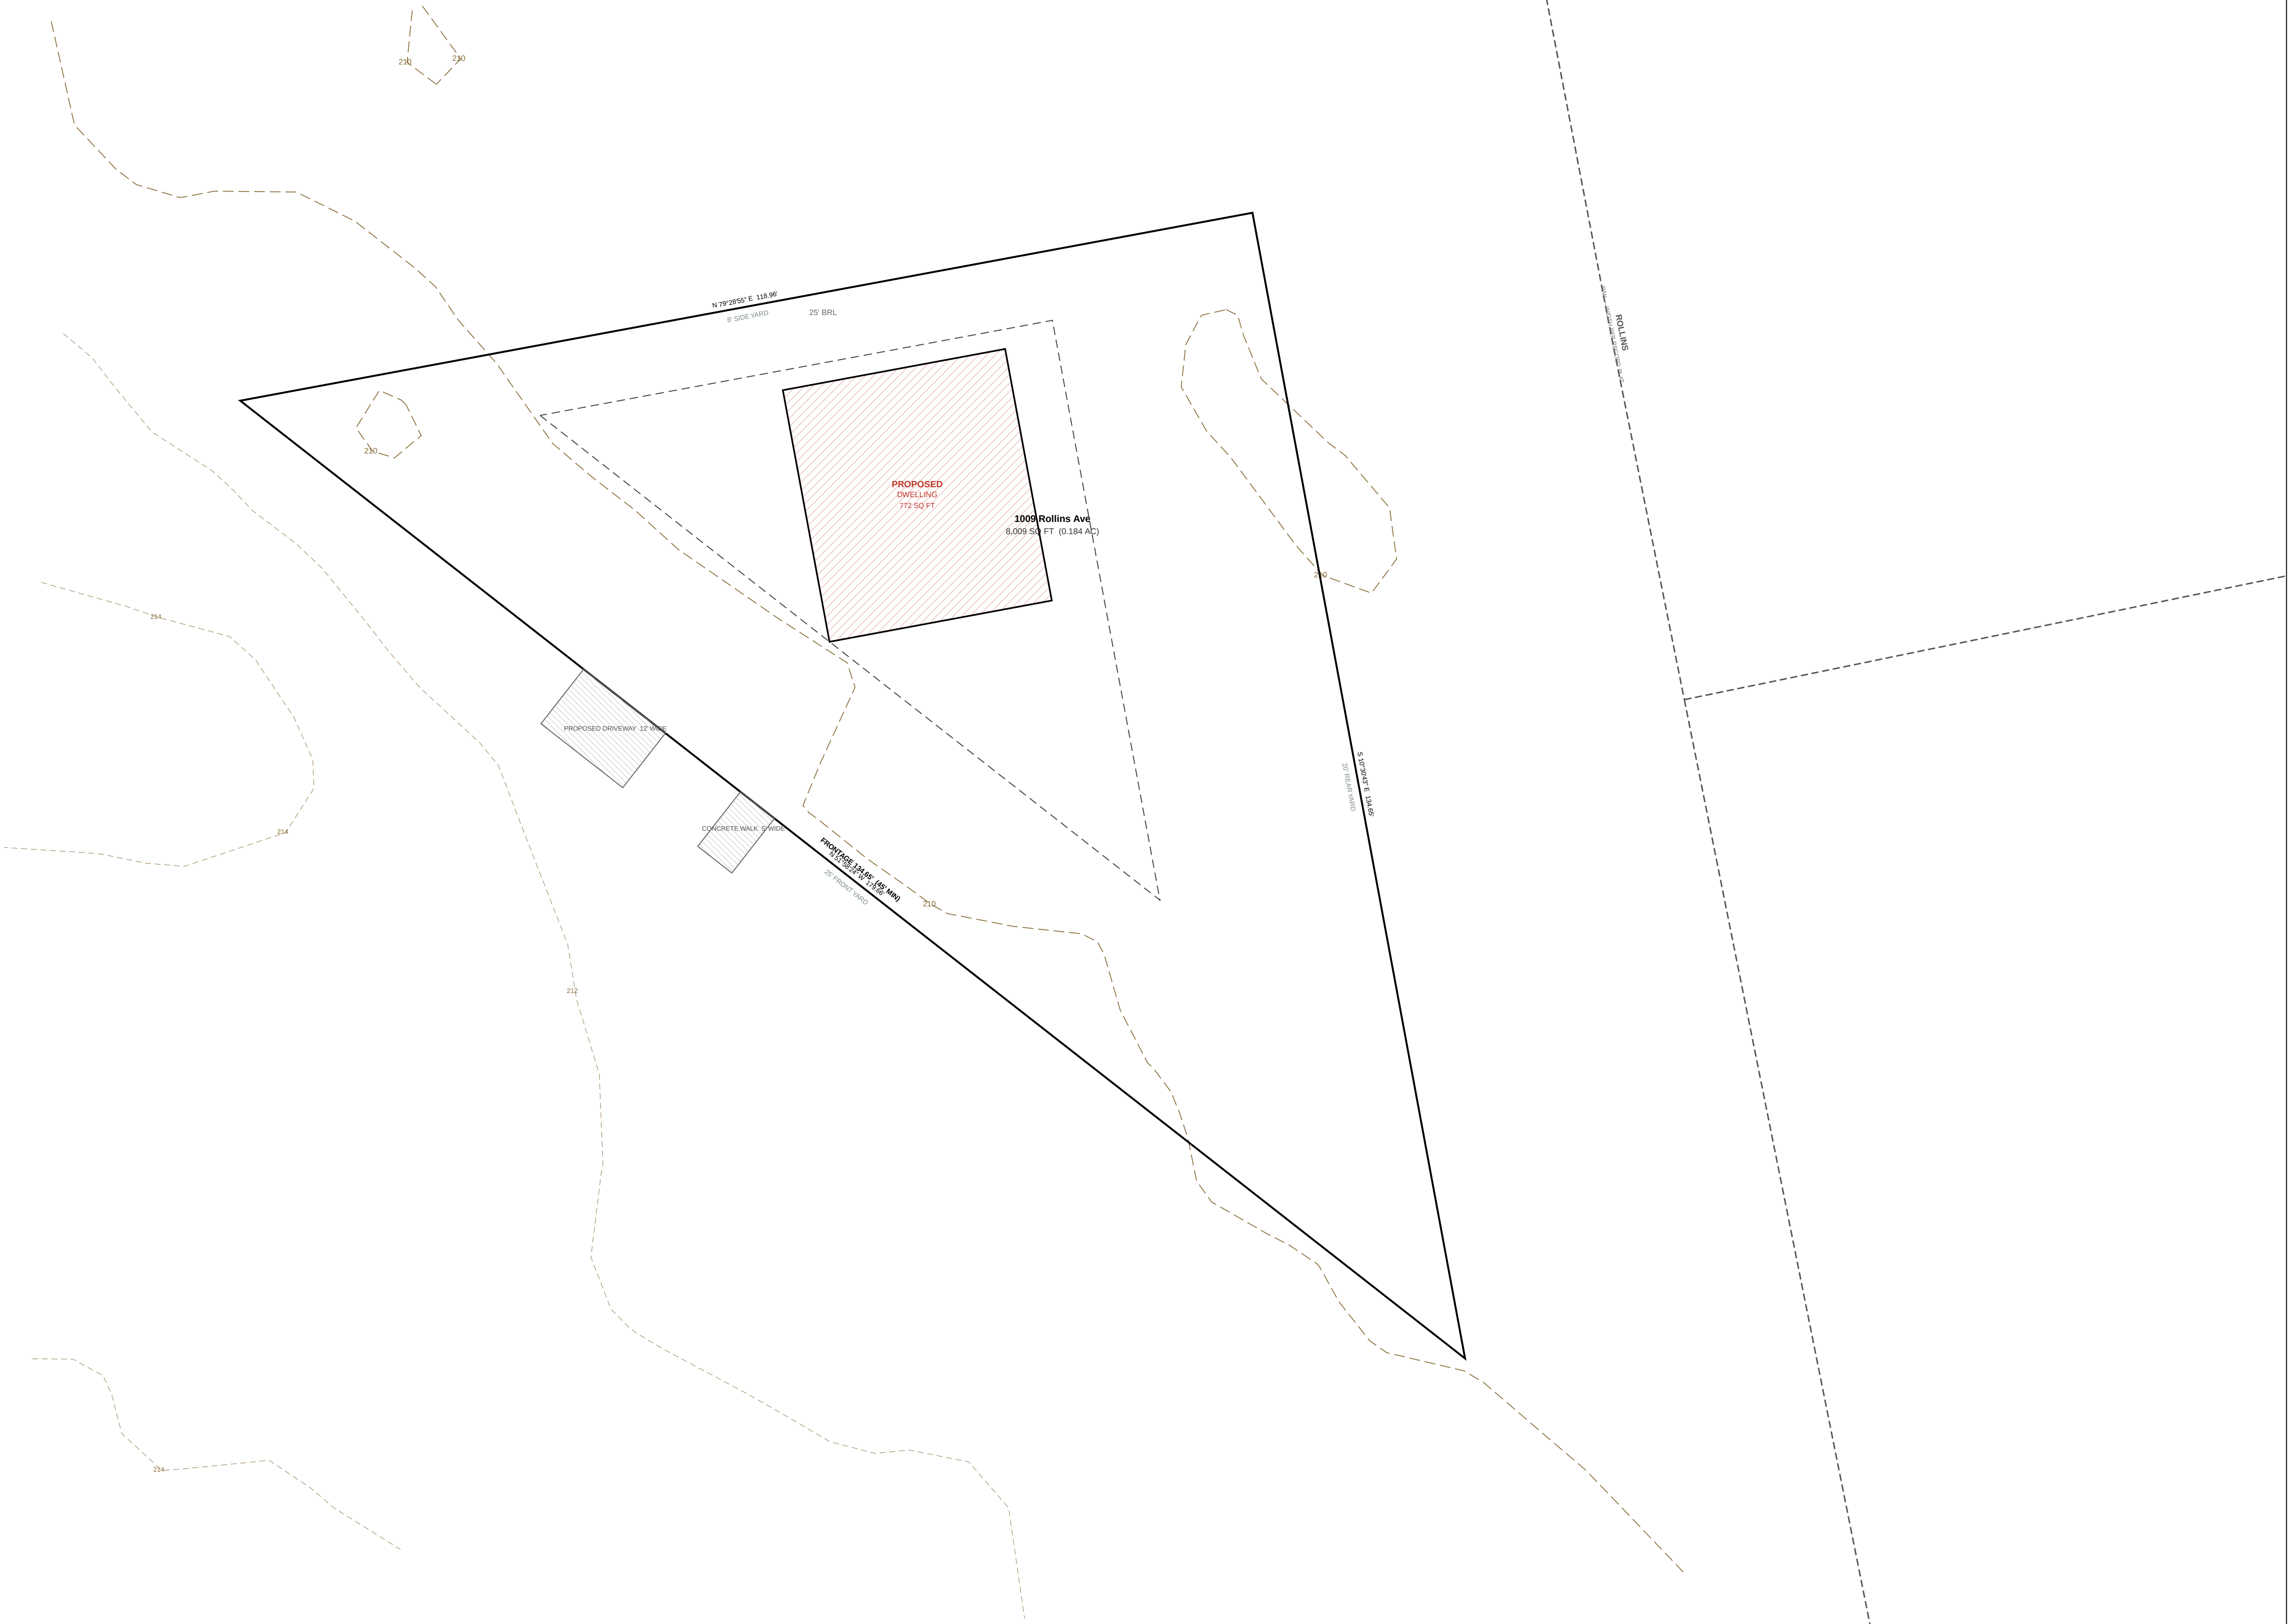

KEALEE

design, build, deliver

PROJECT

1009 Rollins Ave

ADDRESS

1009 Rollins Ave

JURISDICTION

prince georges md

ZONE

RSF-65

SHEET

C-200 — Overall Site and Zoning Plan

SCALE

1" = 10'

STATUS

PRELIMINARY

SHEET NO.

2 OF 5

COORDINATES

EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA

ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS

1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

LEGEND

- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SECONDARY CONTROL, GRADING, SOIL & DRAINAGE



SIGNATURE DATE

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS

— NONE —

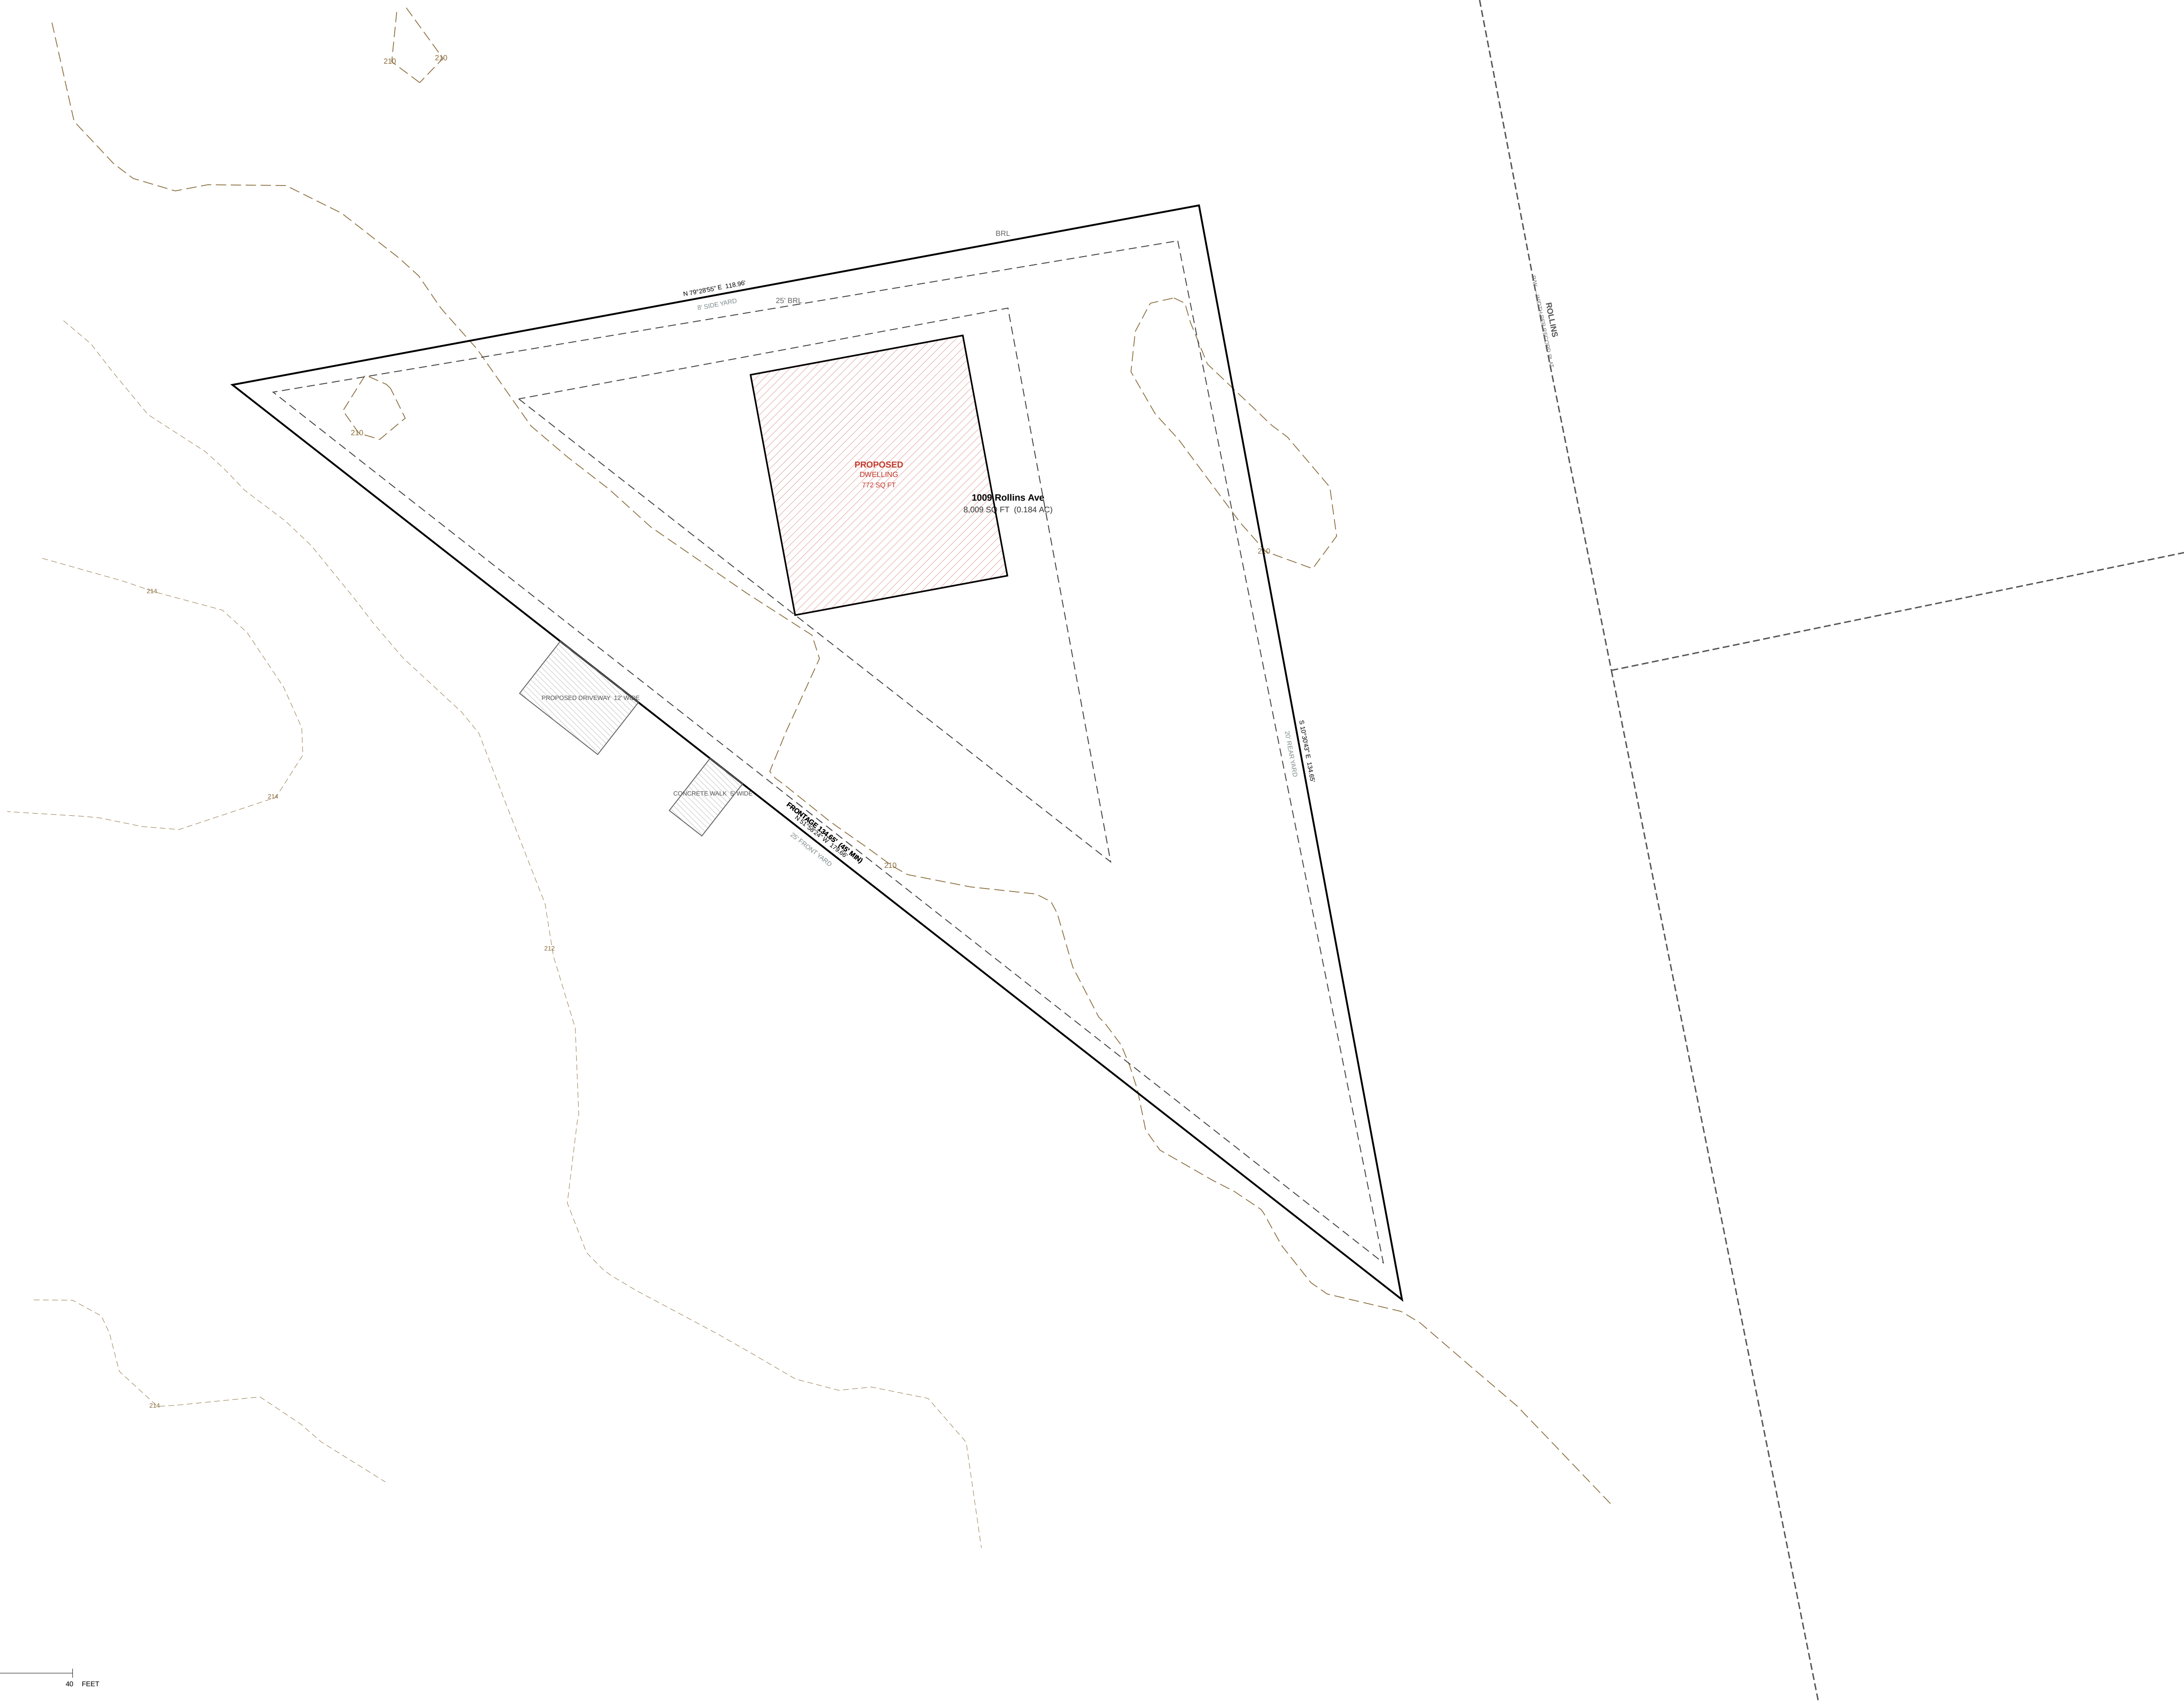

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave

ADDRESS
1009 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-400 — Grading and Drainage Plan

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
3 OF 5

COORDINATES
EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA			
ZONE	RSF-65		
TAX / PARCEL ID	1009 Rollins Ave		
GROSS LOT AREA	8,009 SF	0.184 AC	
LOT FRONTAGE	45' MIN	134.65'	
SETBACKS	REQUIRED	PROVIDED	
FRONT YARD	25'	25'	
SIDE YARD	8'	8'	
REAR YARD	20'	20'	
COVERAGE	MAX	PROPOSED	
LOT COVERAGE	35%	9.6%	
BUILDING FOOTPRINT	—	772 SF	
DATUM			
HORIZONTAL	EPSG:2248	NAD83	
VERTICAL	NAVD83 (feet)		

SITE ANALYSIS	
1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER POC CODE SEC. 22-106.
 - PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

LEGEND	
—	PROPERTY BOUNDARY
- - - - -	BRL — BUILDING RESTRICTION LINE
—	PROPOSED STRUCTURE
—	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- - - - -	STREET CENTRELINE
—	PROPOSED PAVEMENT — DRIVEWAY / WALK
- - - - -	EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SECONDARY CONTROL, GRADING, SOLID & DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

GRADING CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE REQUIREMENTS OF SUBTITLE 22, DIVISION 2 OF THE CODE OF PRINCE GEORGE'S COUNTY WATER RESOURCES PROTECTION AND DRAINAGE CODE AND THAT I OR MY STAFF HAVE INSPECTED THIS SITE AND THAT DRAINAGE FLOWS FROM UPHILL PROPERTIES ONTO THIS SITE, AND FROM THIS SITE ONTO DOWNHILL PROPERTIES, HAVE BEEN ADDRESSED IN SUBSTANTIAL ACCORDANCE WITH APPLICABLE CODES, SIGNED, SEALED AND DATED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF MARYLAND.

Prince George's County DPE, Site Rough Grading Design Review Checklist, Item A-10

STABILIZATION COMPLIANCE PREAMBLE

Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.02 by January 9, 2023, regardless of when an erosion and sediment control plan was approved.

COMAR 26.17.02.06(C)(3), Grandbattering of approval plans



STANDARD STABILIZATION NOTE

Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter ditches, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1), and b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

2021 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (revised by COMAR 26.17.02.06(C)(3))

REVISIONS

— NONE —

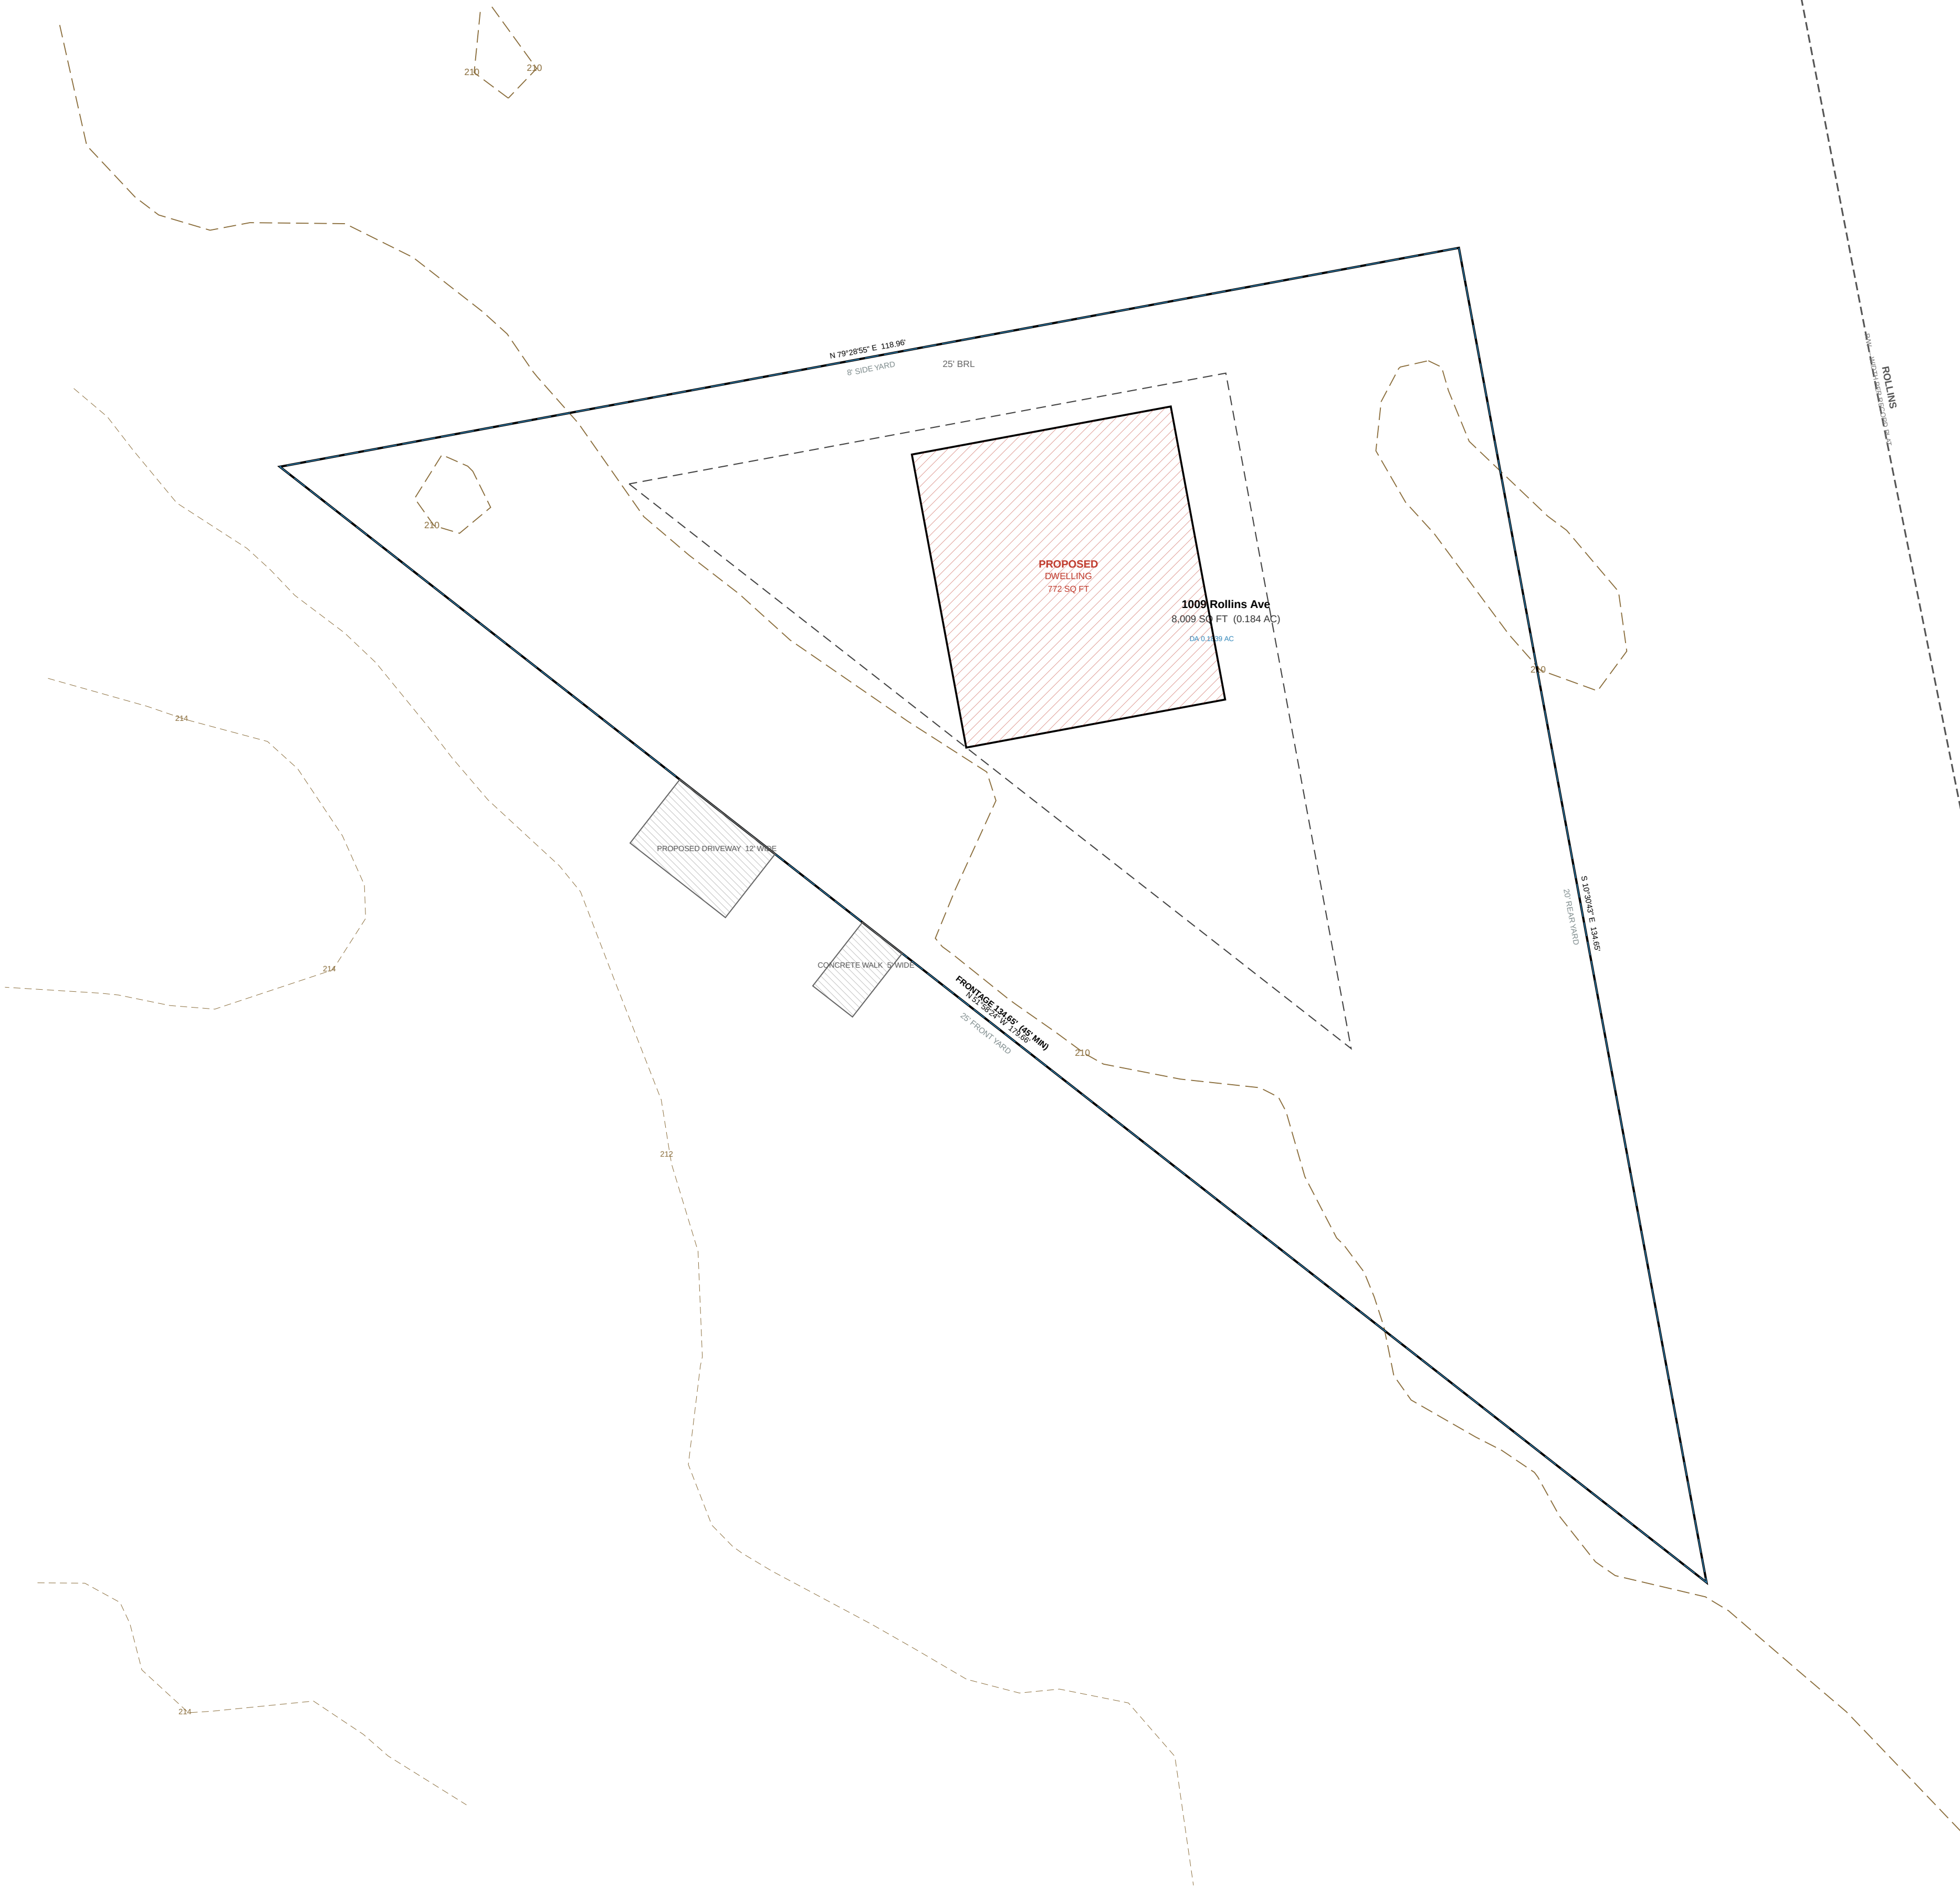

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-500 — Utility Plan
SCALE
1" = 10'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248 NAD83	
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade; construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted by the inspector	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES		
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.		
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32.106.		
3. PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.		
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.		
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.		

LEGEND		
—	PROPERTY BOUNDARY	
- - - - -	BRL — BUILDING RESTRICTION LINE	
—	PROPOSED STRUCTURE	
—	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83	
- - - - -	STREET CENTRELINE	
—	PROPOSED PAVEMENT — DRIVEWAY / WALK	
- - - - -	EASEMENT	

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SECONDARY CONTROL, GRADING, SOIL & DRAINAGE



SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS

— NONE —

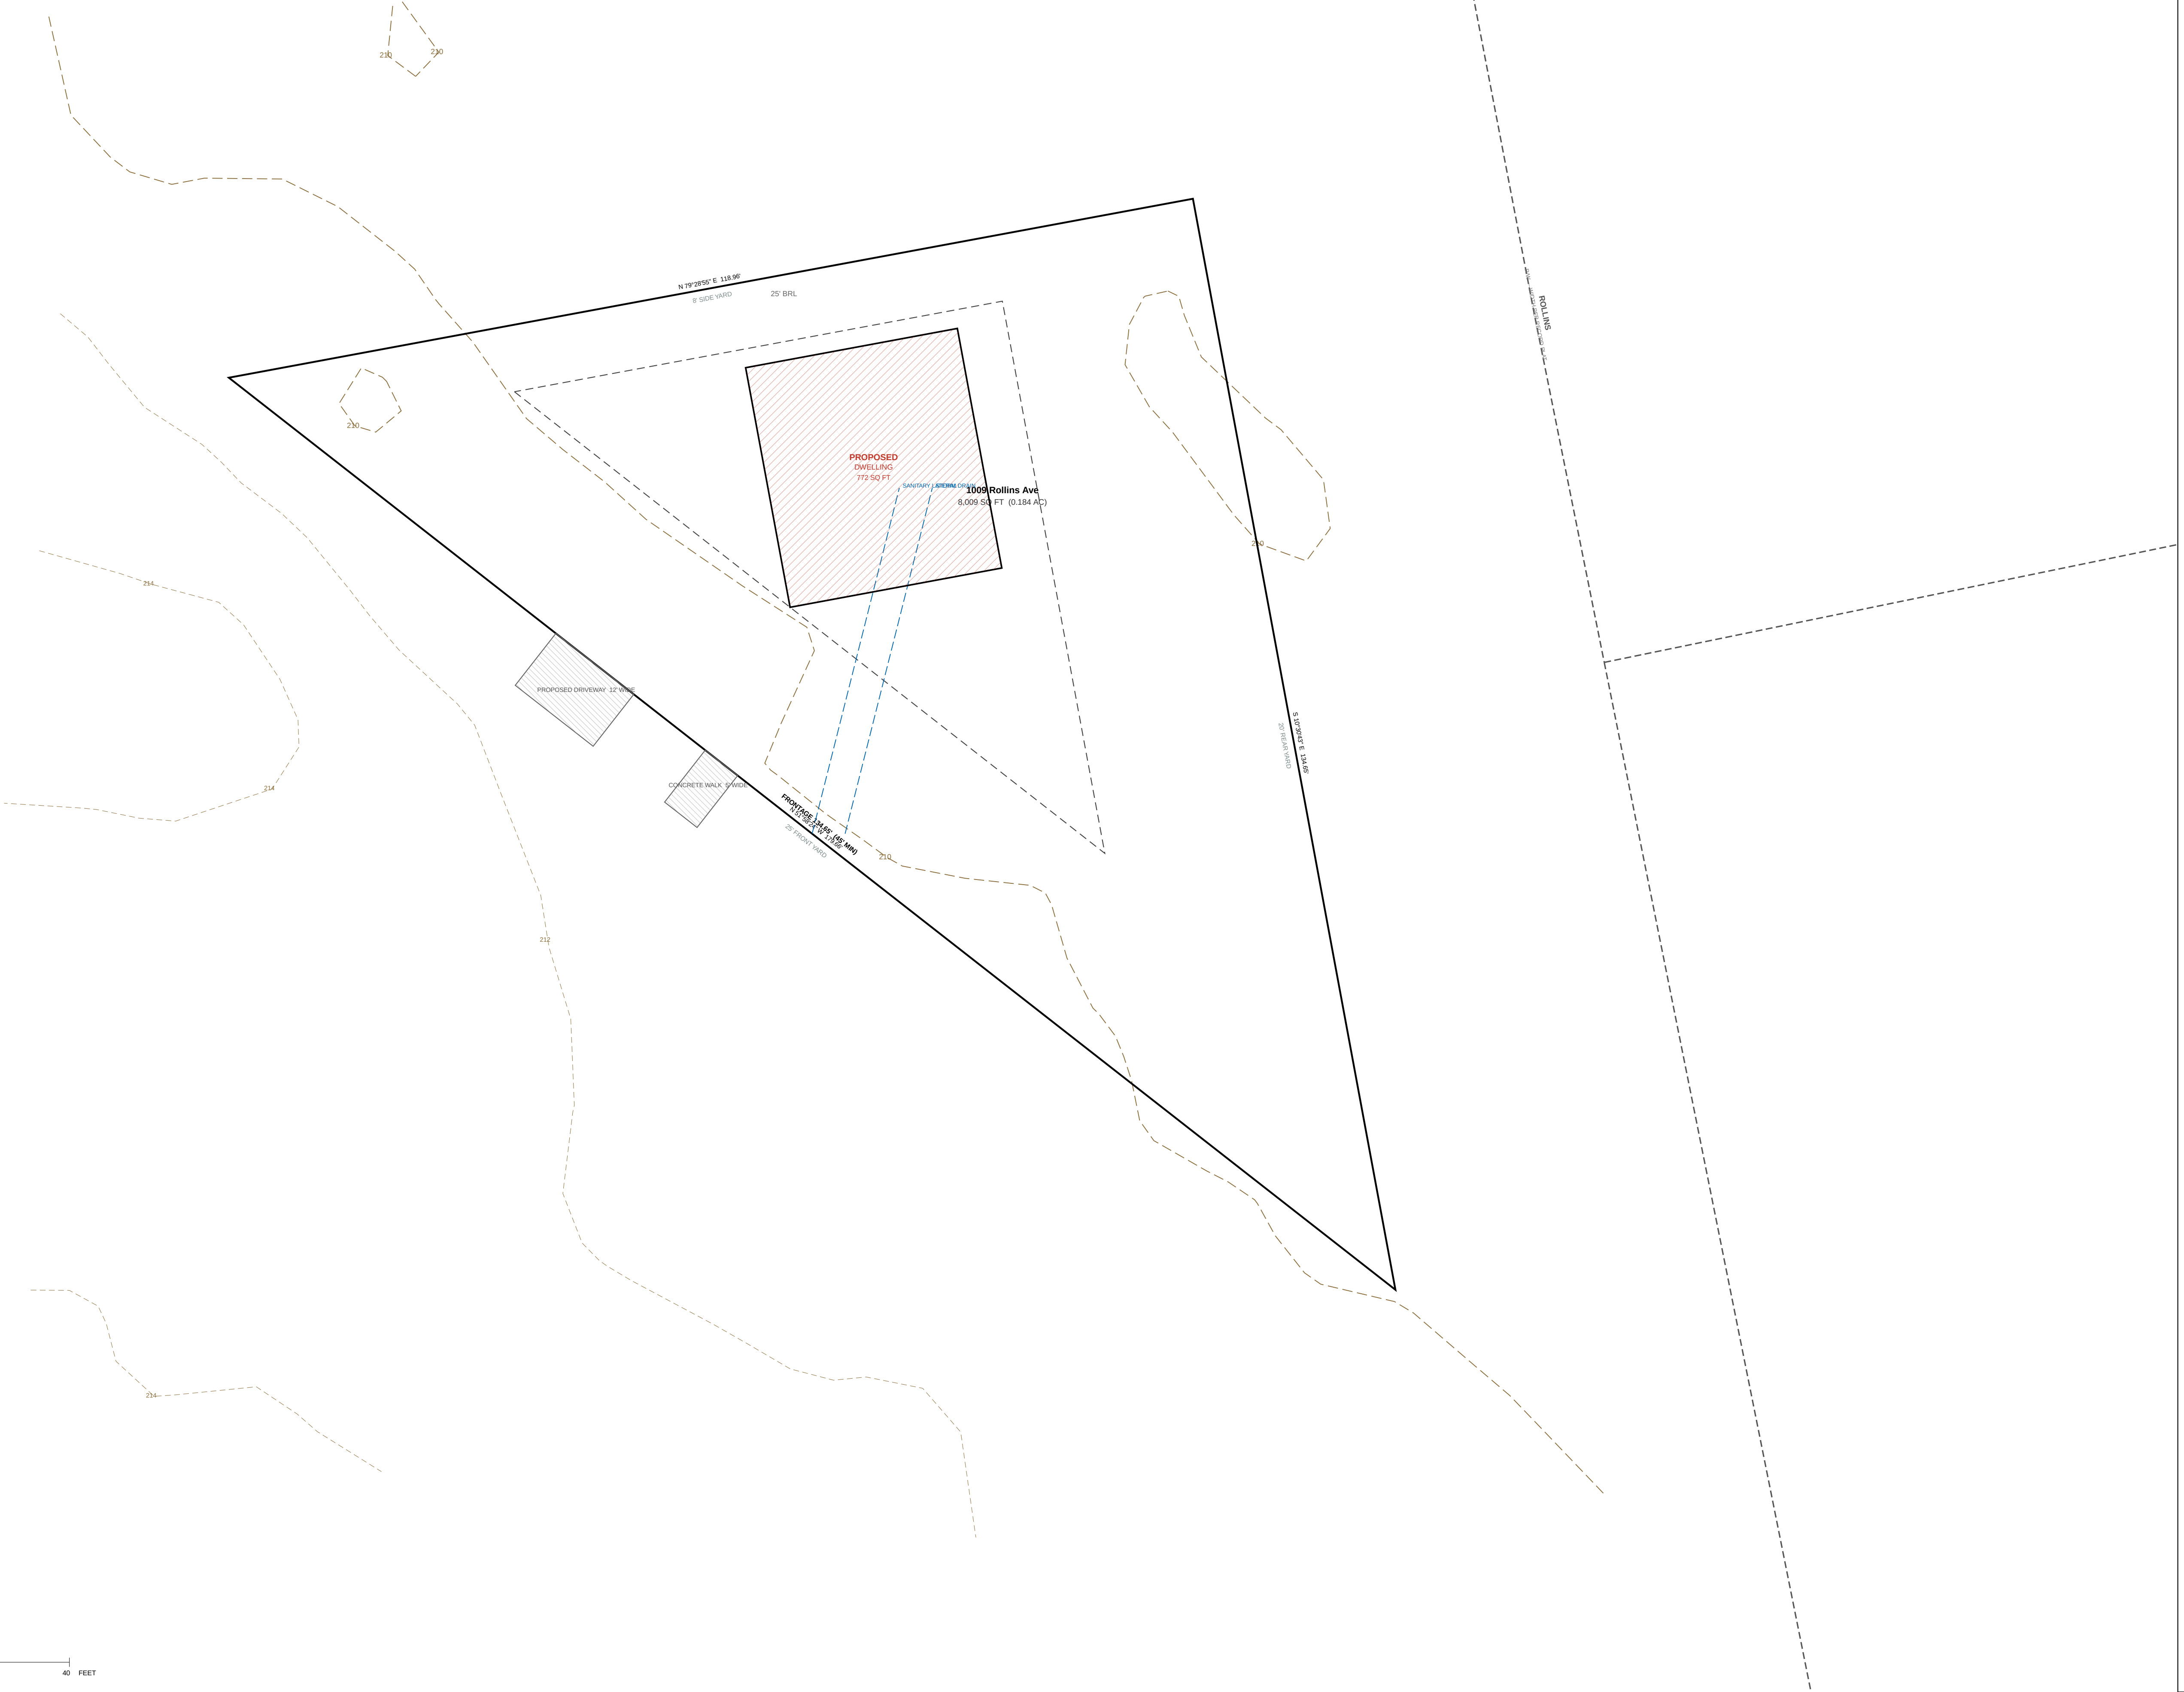

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 10'
STATUS
PRELIMINARY
SHEET NO.
5 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION		
1. Pre-construction meeting		1 DAY
2. Obtain necessary permits		2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation		1 DAY
4. Construct stabilized construction entrance and perimeter sediment control		2 DAYS
5. Rough grade, construct dwelling, utilities and driveway		12 MONTHS
6. Fine grade and stabilize all disturbed areas		1 DAY
7. Remove sediment control devices when written permission has been granted		1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS		

GENERAL NOTES		
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.		
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.		
3. PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.		
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.		
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.		

LEGEND	
—	PROPERTY BOUNDARY
- - - - -	BRL — BUILDING RESTRICTION LINE
—	PROPOSED STRUCTURE
—	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- - - - -	STREET CENTRELINE
—	PROPOSED PAVEMENT — DRIVEWAY / WALK
- - - - -	EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SECONDARY CONTROL, GRADING, SOIL & DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS
— NONE —

