

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave

ADDRESS
1009 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-000 — Cover Sheet, Approvals and General Notes

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
1 OF 11

COORDINATES
EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION		
1. Preconstruction meeting		1 DAY
2. Obtain necessary permits		2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation		1 DAY
4. Construct stabilized construction entrance and perimeter sediment control		2 DAYS
5. Rough grade, construct dwelling, utilities and driveway		12 MONTHS
6. Fine grade and stabilize all disturbed areas		1 DAY
7. Remove sediment control devices when written permission has been granted		1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS		

GENERAL NOTES		
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.		
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32-106.		
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.		
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.		
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.		

PLAT OF RECORD		
Porter Subdivision, Plat Book PM 231 p.50		
NOTES OF RECORD		
1. BASIS OF RECORDING: Maryland State Plane Coordinate System (NAD 83).		
2. BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.		
3. A transcription is not a field survey. Monumentation is not verified here.		

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this platting.

LEGEND		
-----	PROPERTY BOUNDARY	
-----	BRL — BUILDING RESTRICTION LINE	
-----	PROPOSED STRUCTURE	
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83	
-----	STREET CENTRELINE	
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK	
-----	EASEMENT	



PRINCE GEORGES'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

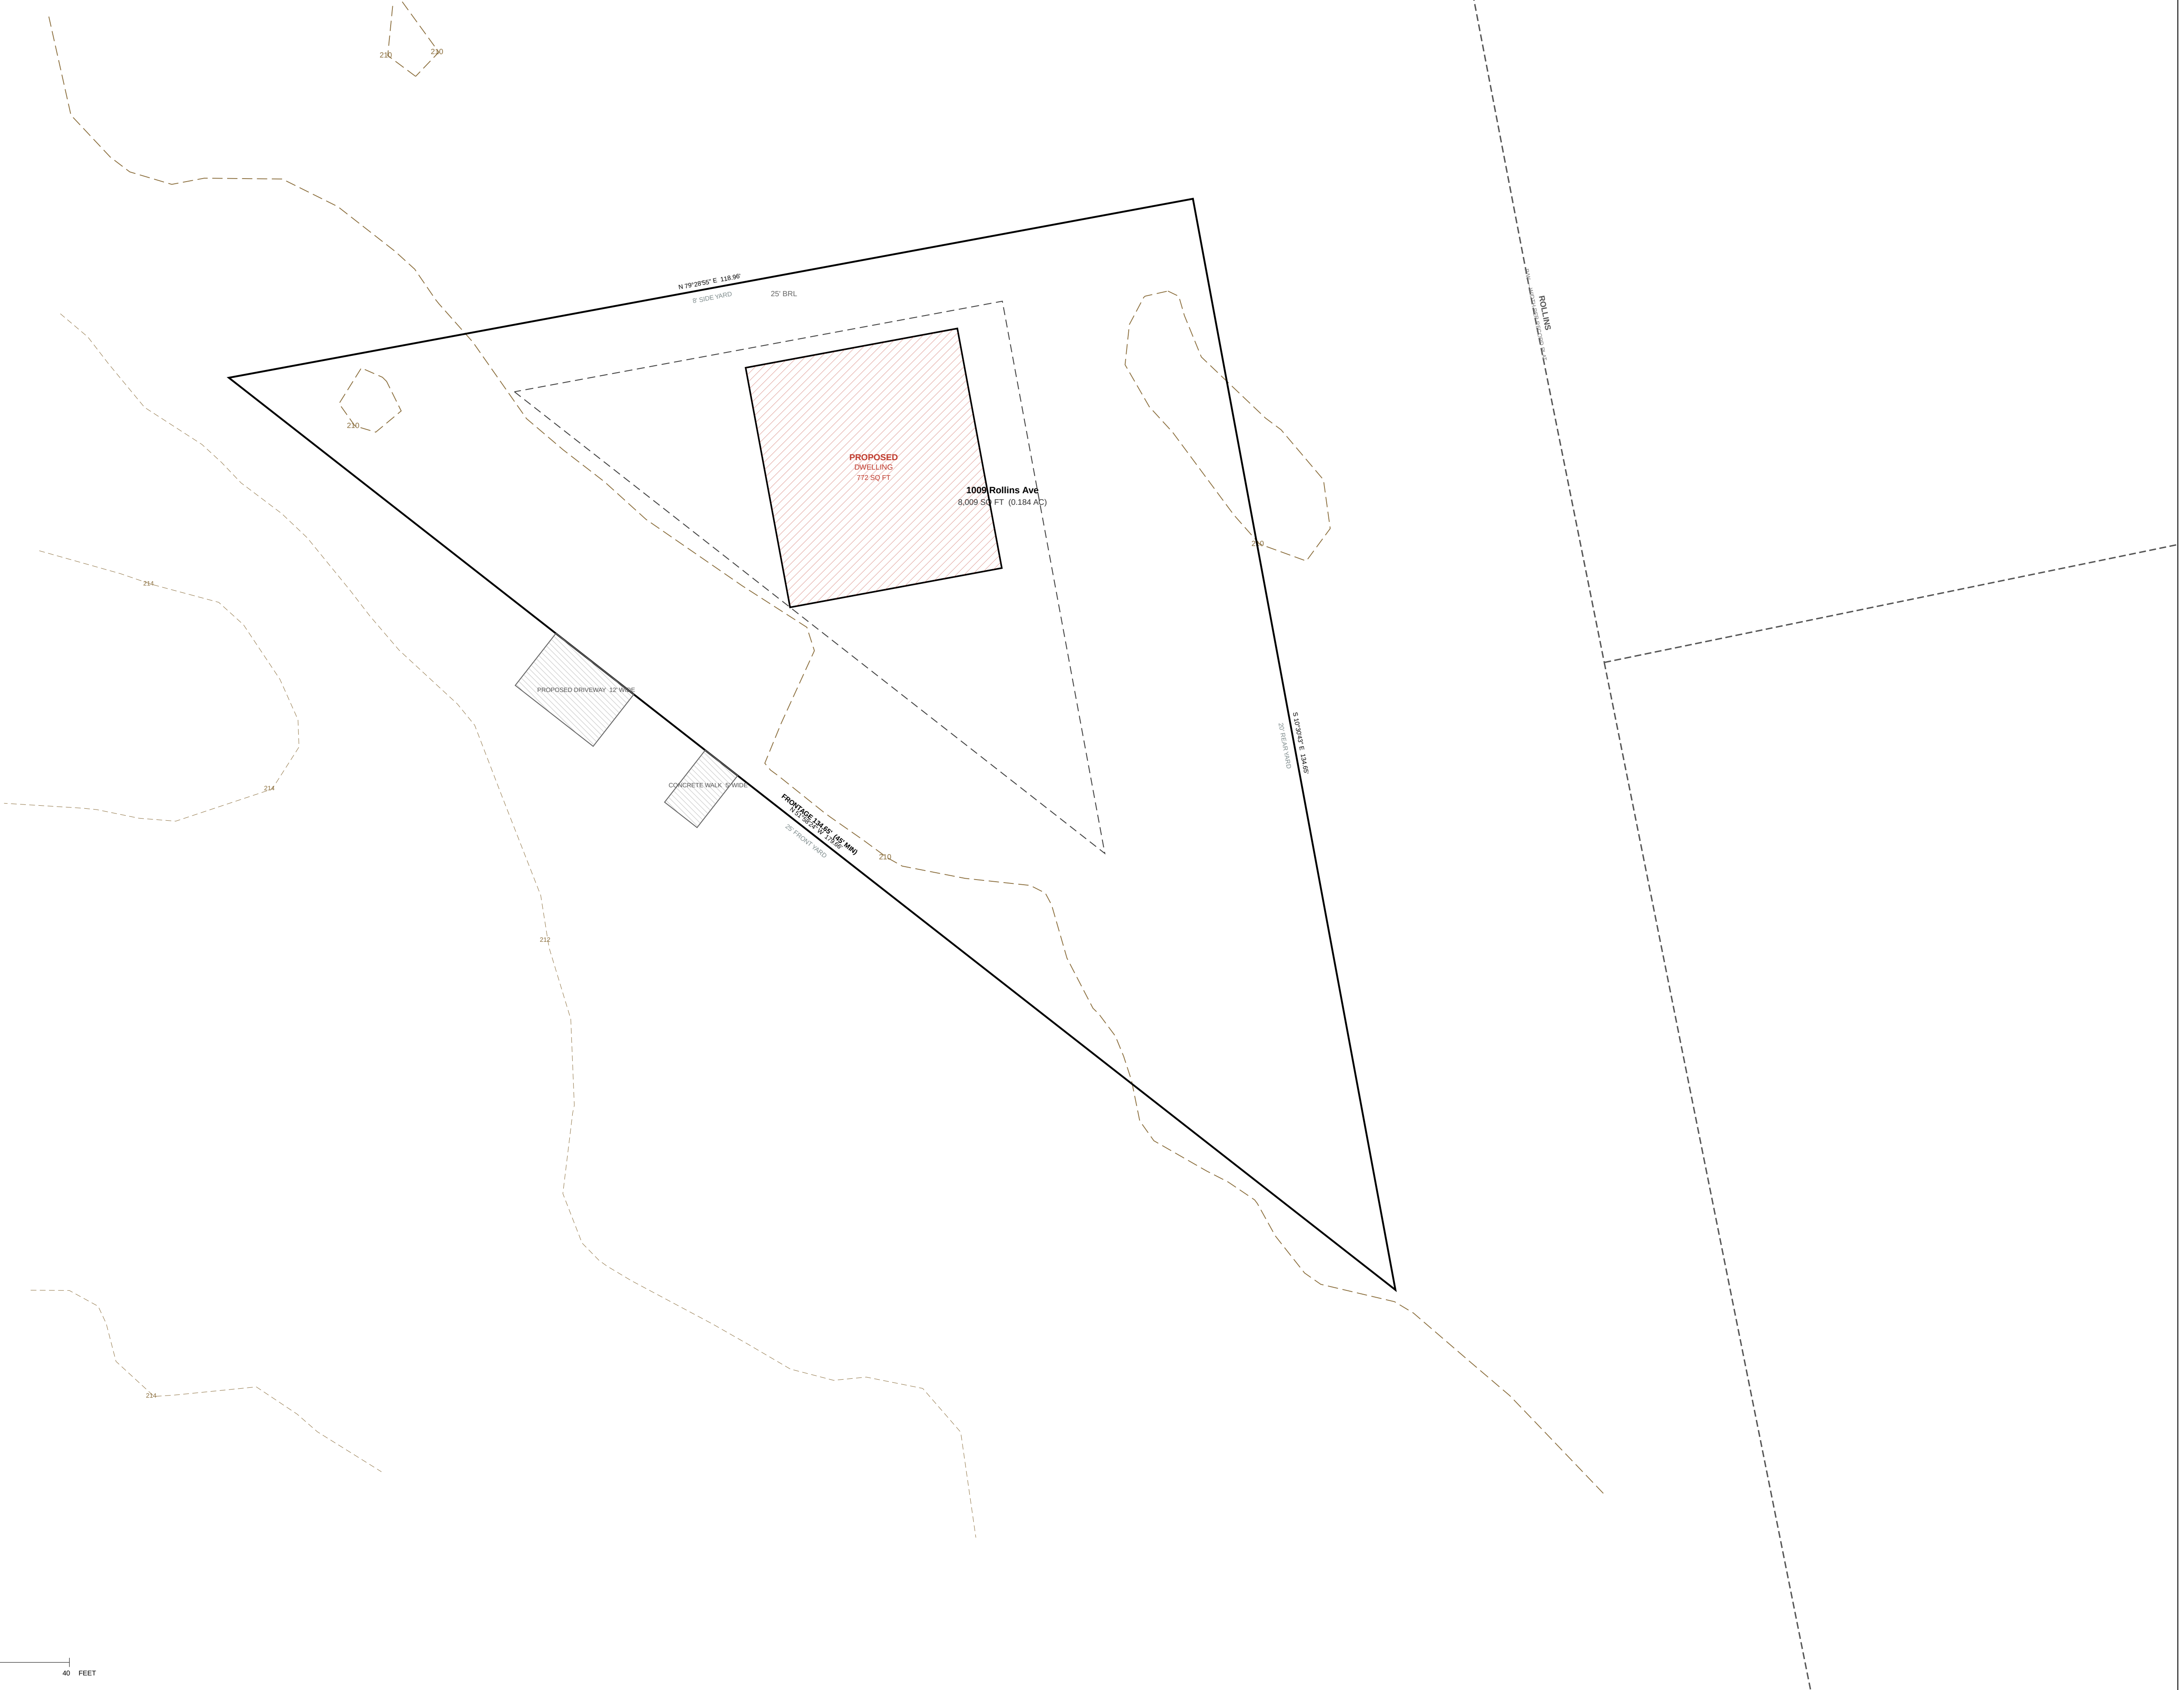

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave

ADDRESS
1009 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-100 — Existing Conditions and Boundary Plan

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
2 OF 11

COORDINATES
EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION		
1. Preconstruction meeting		1 DAY
2. Obtain necessary permits		2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation		1 DAY
4. Construct stabilized construction entrance and perimeter sediment control		2 DAYS
5. Rough grade, construct dwelling, utilities and driveway		12 MONTHS
6. Fine grade and stabilize all disturbed areas		1 DAY
7. Remove sediment control devices when written permission has been granted		1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS		

GENERAL NOTES		
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.		
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32.106.		
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.		
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.		
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.		

PLAT OF RECORD		
Porter Subdivision, Plat Book PM 231 p.50		
NOTES OF RECORD		
1. BASIS OF RECORDING: Maryland State Plane Coordinate System (NAD 83).		
2. BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.		
3. A transcription is not a field survey. Monumentation is not verified here.		

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this platting.

LEGEND		
-----	PROPERTY BOUNDARY	
-----	BRL — BUILDING RESTRICTION LINE	
-----	PROPOSED STRUCTURE	
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83	
-----	STREET CENTRELINE	
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK	
-----	EASEMENT	


PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

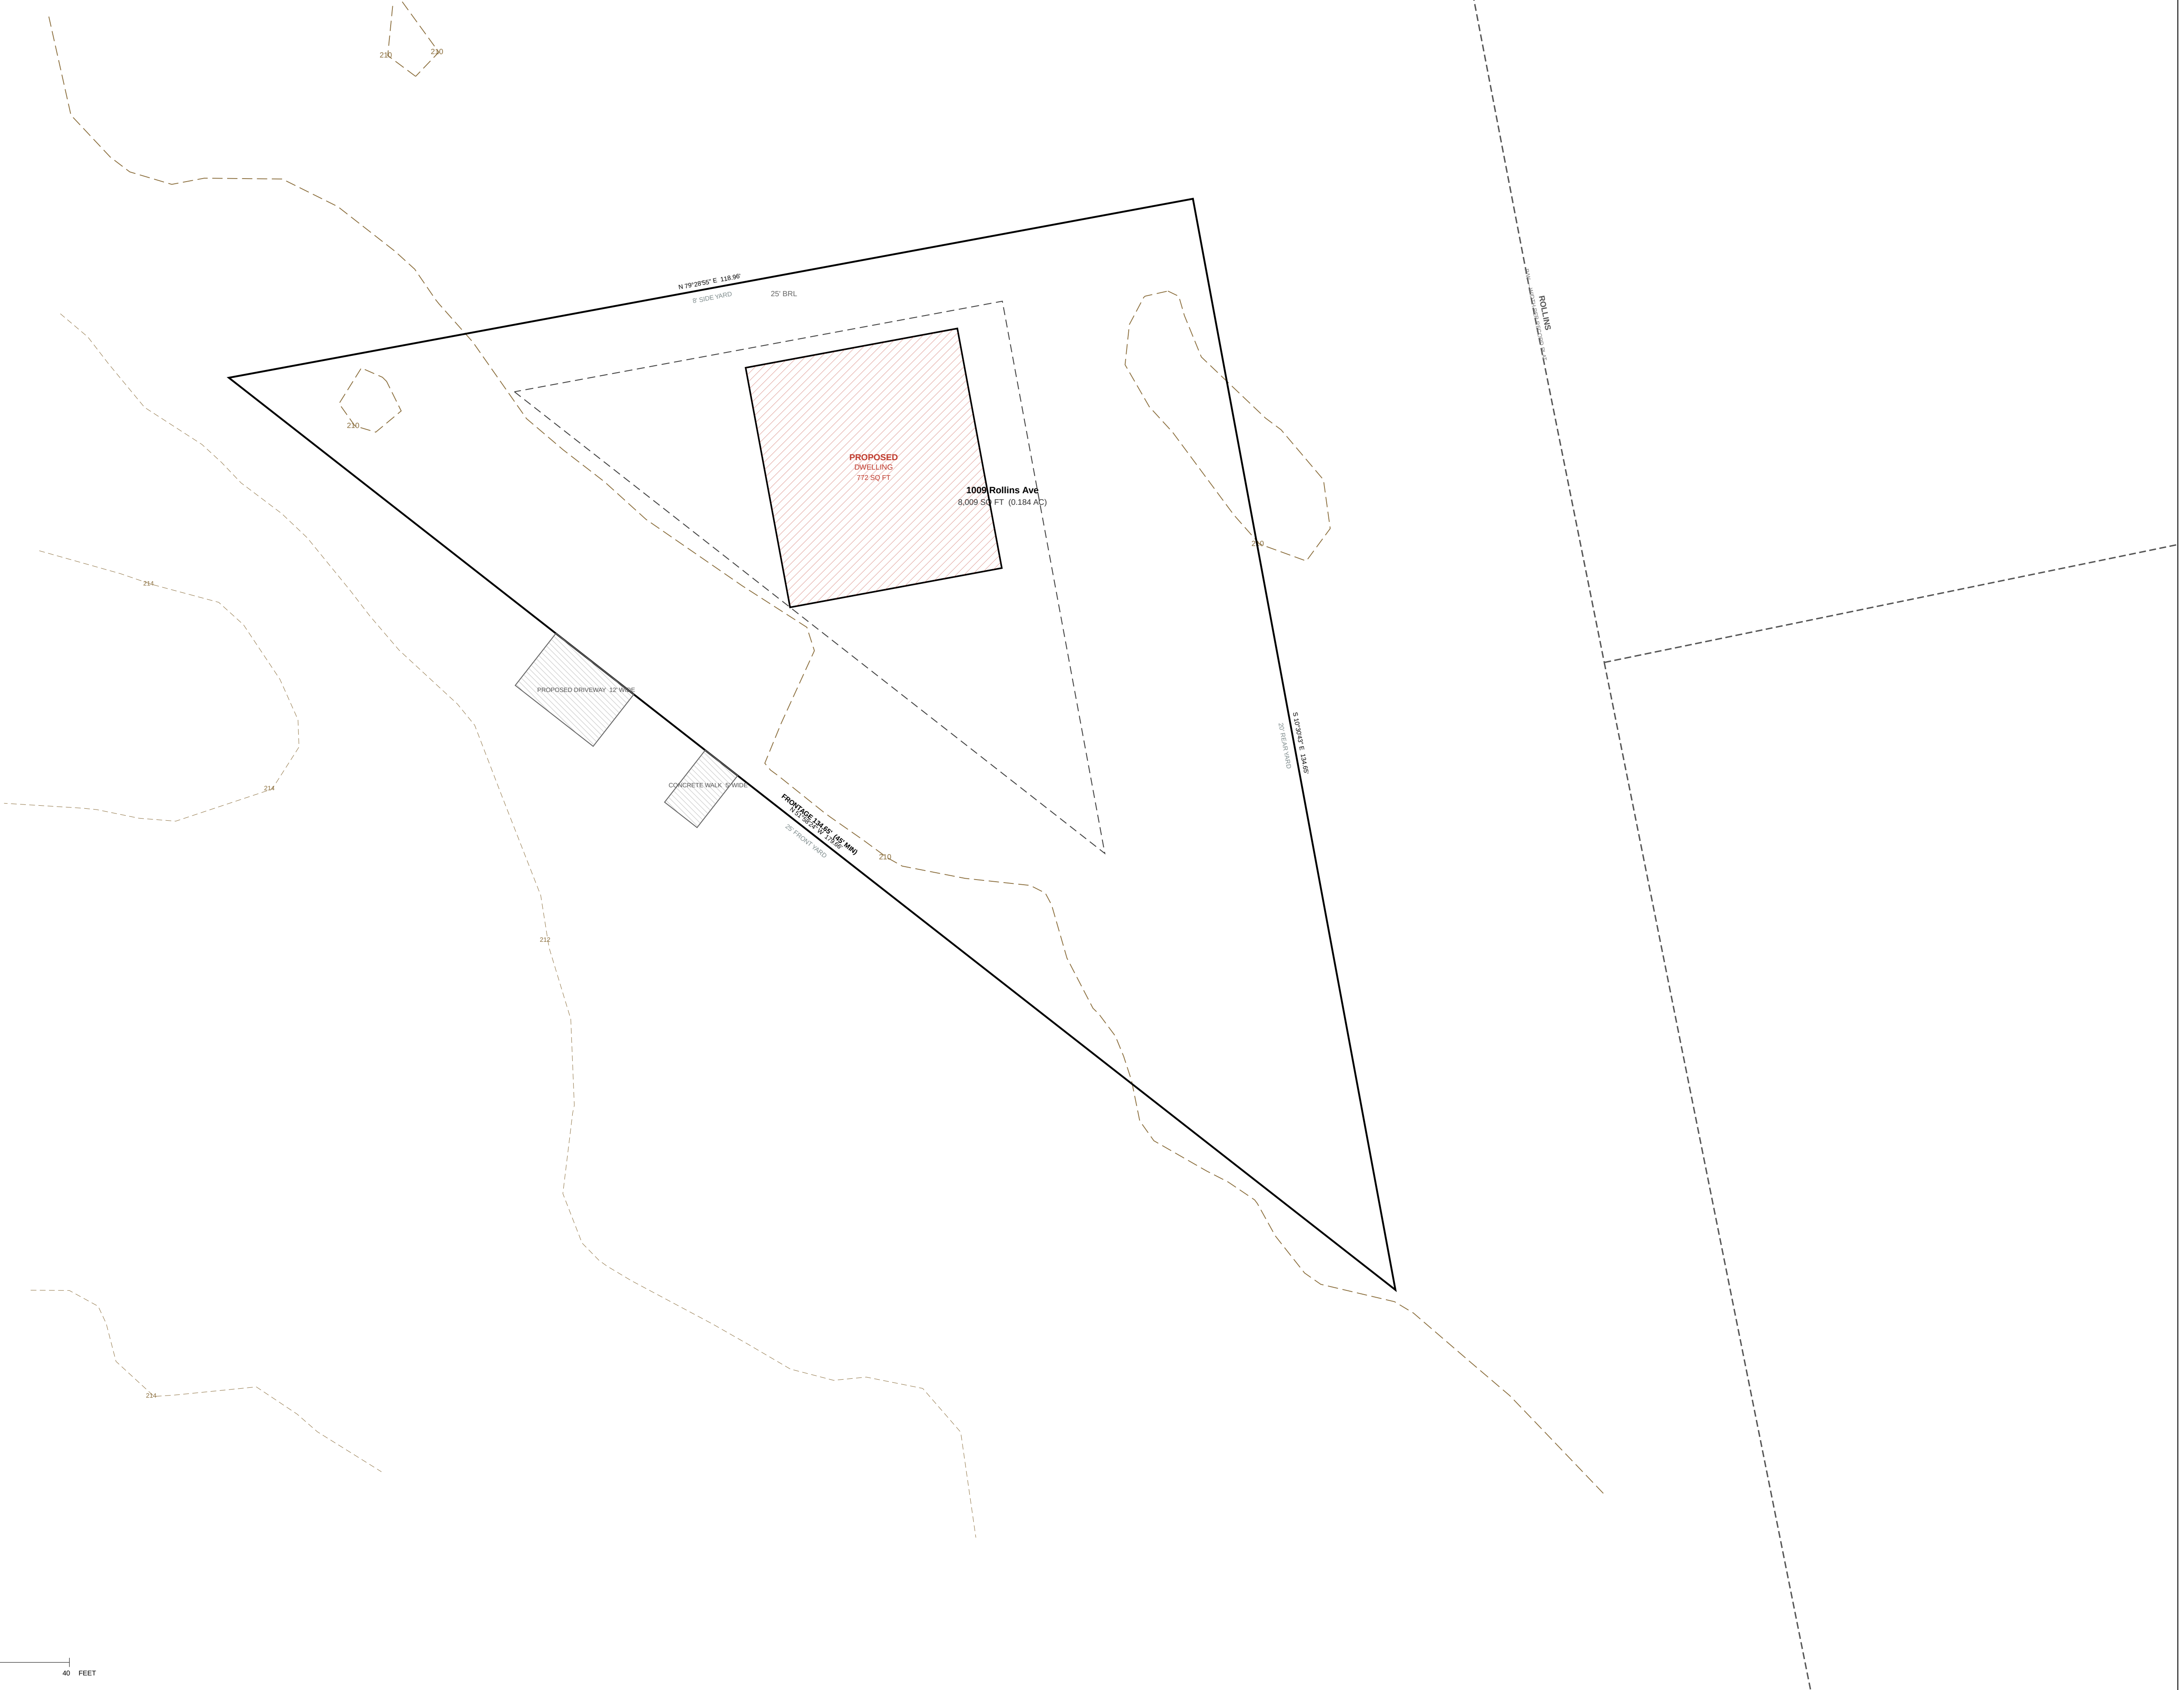

KEALEE

design, build, deliver

PROJECT

1009 Rollins Ave

ADDRESS

1009 Rollins Ave

JURISDICTION

prince georges md

ZONE

RSF-65

SHEET

C-200 — Overall Site and Zoning Plan

SCALE

1" = 10'

STATUS

PRELIMINARY

SHEET NO.

3 OF 11

COORDINATES

EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION		
1. Pre-construction meeting		1 DAY
2. Obtain necessary permits		2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation		1 DAY
4. Construct stabilized construction entrance and perimeter sediment control		2 DAYS
5. Rough grade, construct dwelling, utilities and driveway		12 MONTHS
6. Fine grade and stabilize all disturbed areas		1 DAY
7. Remove sediment control devices when written permission has been granted		1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS		

GENERAL NOTES		
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.		
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.		
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.		
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.		
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.		

PLAT OF RECORD		
Porter Subdivision, Plat Book PM 231 p.50		
NOTES OF RECORD		
1. BASIS OF RECORDING: Maryland State Plane Coordinate System (NAD 83).		
2. BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.		
3. A transcription is not a field survey. Monumentation is not verified here.		

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation set to this platting.

LEGEND	
-----	PROPERTY BOUNDARY
----- BRL	BRL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT



PRINCE GEORGES'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

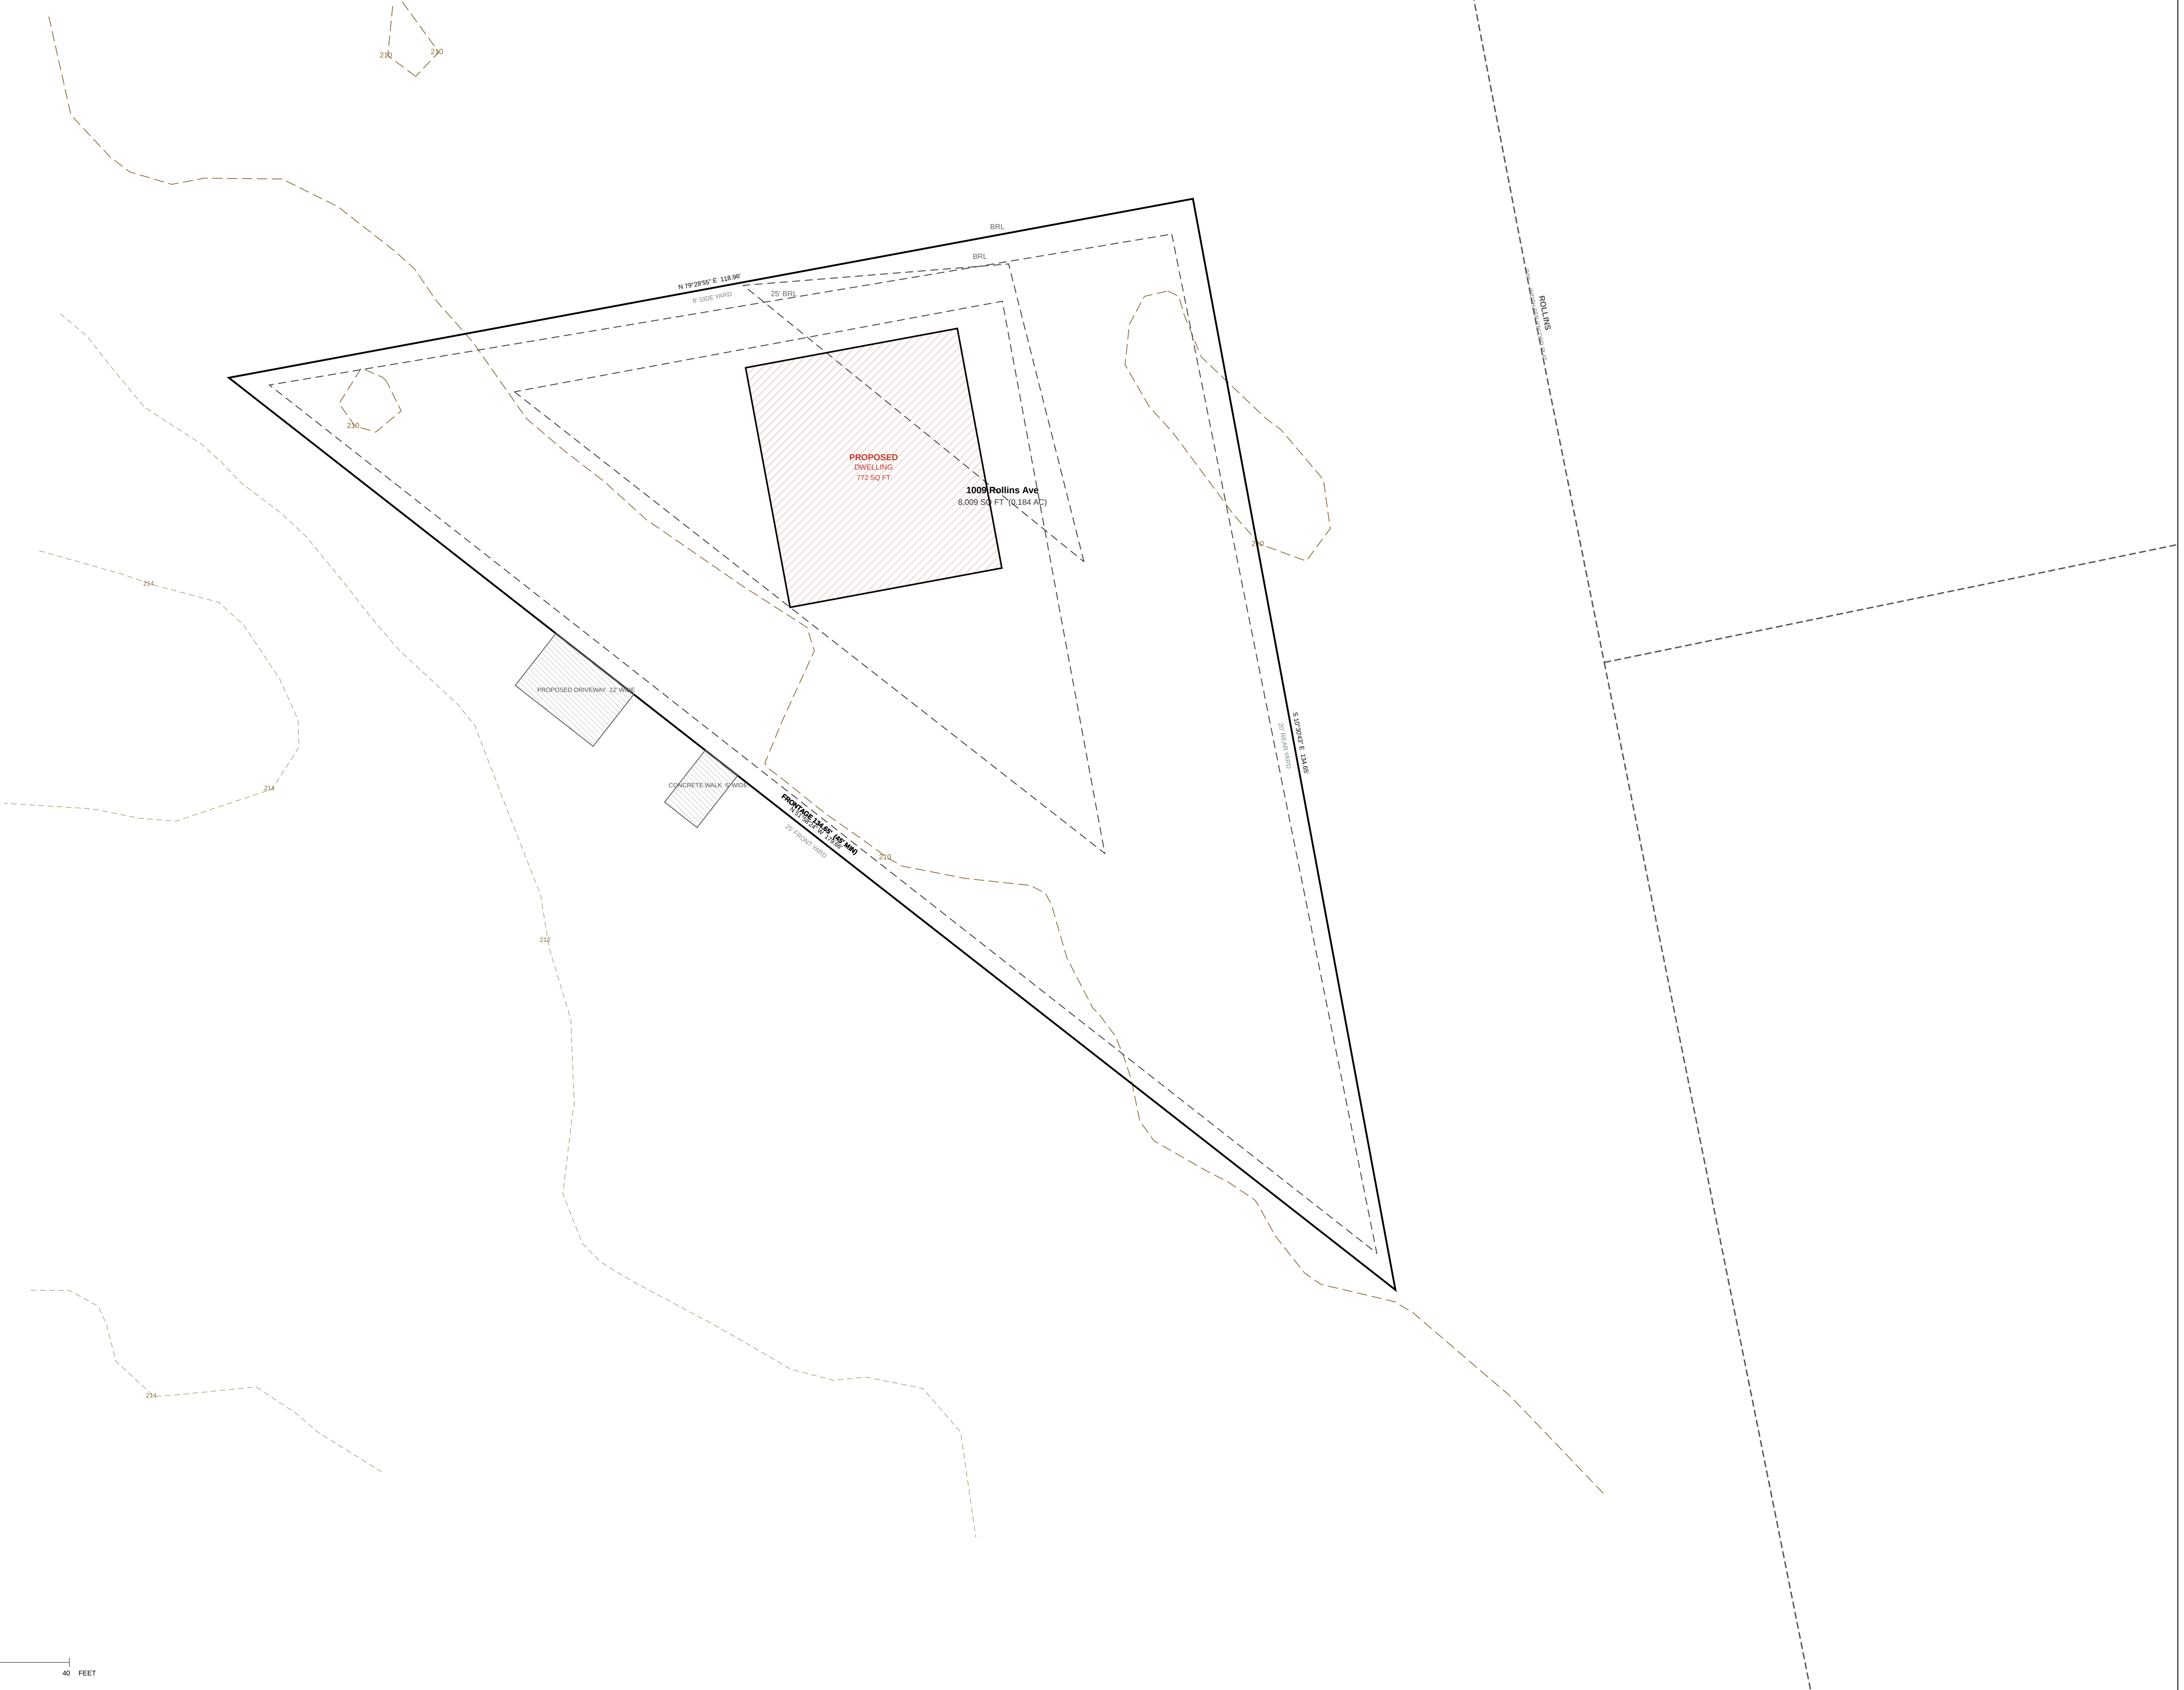

KEALEE

design, build, deliver

PROJECT

1009 Rollins Ave

ADDRESS

1009 Rollins Ave

JURISDICTION

prince georges md

ZONE

RSF-65

SHEET

C-300 — Demolition Plan

SCALE

1" = 10'

STATUS

PRELIMINARY

SHEET NO.

4 OF 11

COORDINATES

EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32.106.
 - PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD**
Porter Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD**
- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this plan.

- LEGEND**
- PROPERTY BOUNDARY
 - BRL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT



PRINCE GEORGES'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

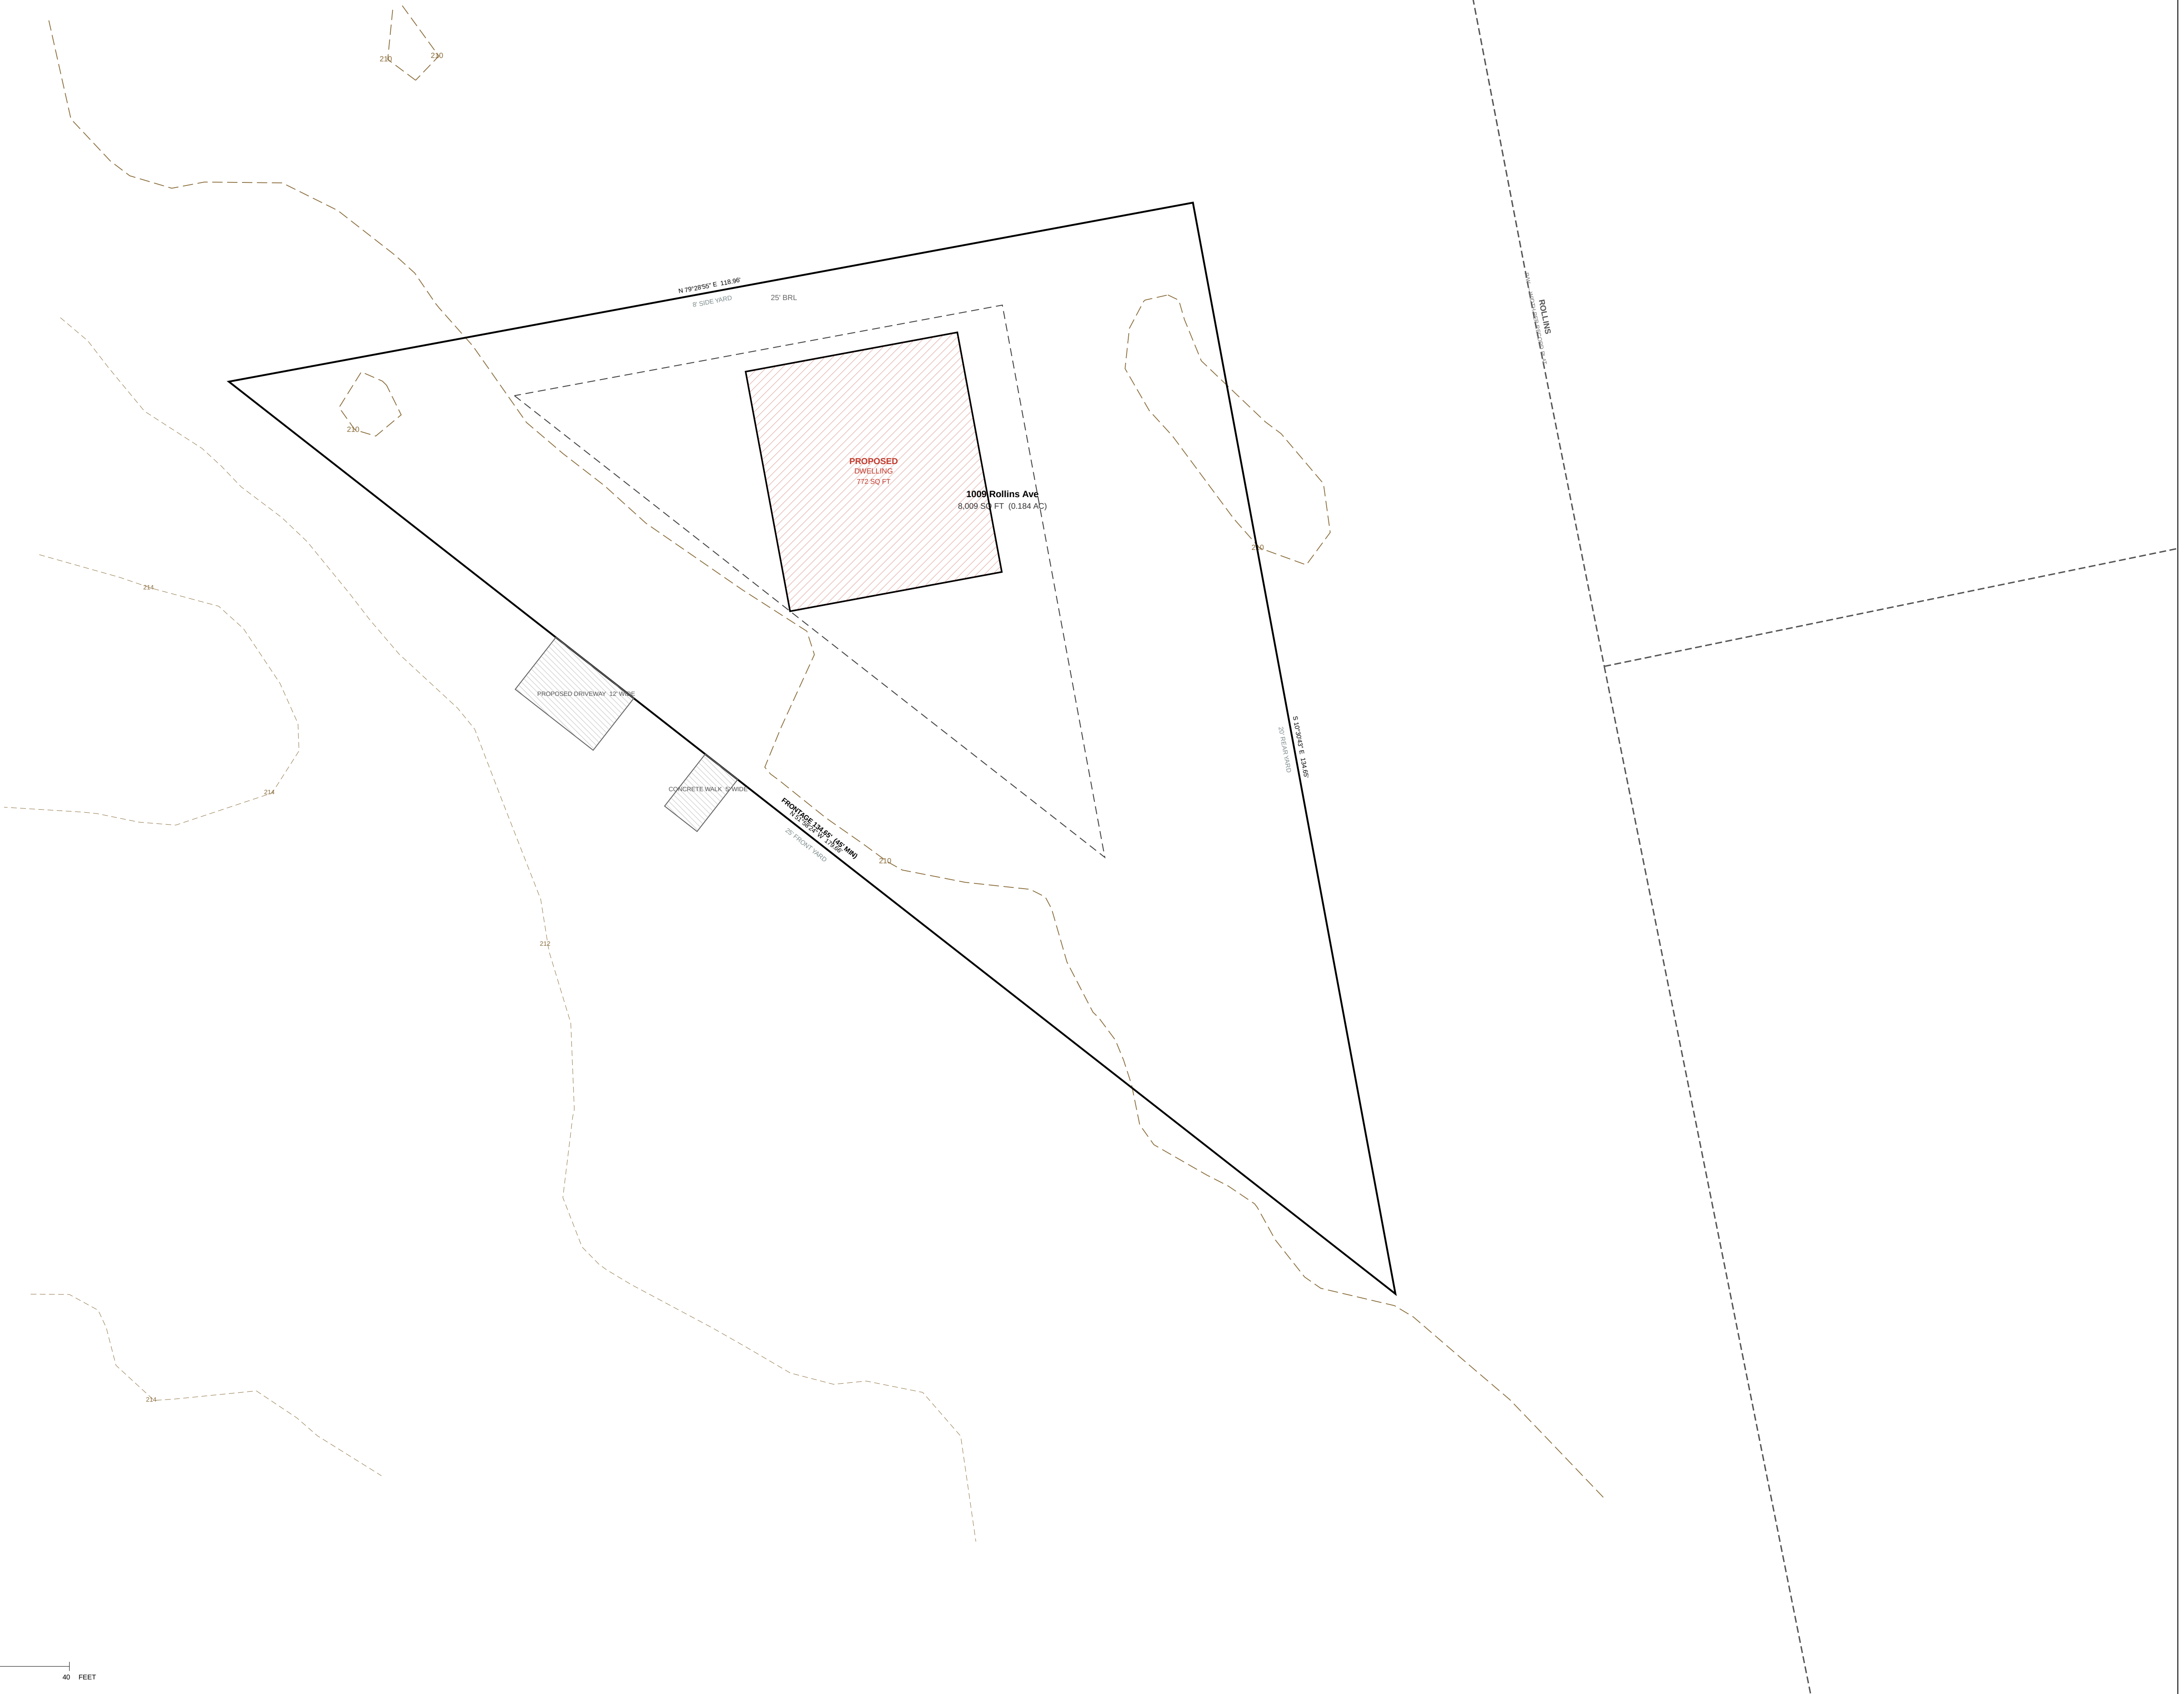

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 10'
STATUS
PRELIMINARY
SHEET NO.
5 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32.106.
- PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD

Porter Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument; not in this drawing.

LEGEND

- PROPERTY BOUNDARY
- BRL --- BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR --- PGATLAS 2 FT (2023), NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT --- DRIVEWAY / WALK
- EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

GRADING CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE REQUIREMENTS OF SUBTITLE 32, DIVISION 2 OF THE CODE OF PRINCE GEORGE'S COUNTY WATER RESOURCES PROTECTION AND GRADING CODE AND THAT I OR MY STAFF HAVE INSPECTED THIS SITE AND THAT DRAINAGE FLOWS FROM UPHILL PROPERTIES ONTO THIS SITE, AND FROM THIS SITE ONTO DOWNHILL PROPERTIES, HAVE BEEN ADDRESSED IN SUBSTANTIAL ACCORDANCE WITH APPLICABLE CODES, SIGNED, SEALED AND DATED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF MARYLAND.

STABILIZATION COMPLIANCE PREAMBLE

Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.01 by January 9, 2013, regardless of when an erosion and sediment control plan was approved. COMAR 26.17.01.05(c)(3), Grandfathering of approved plans




STANDARD STABILIZATION NOTE

Following initial soil disturbance or redistribution, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter ditches, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1); and b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

2013 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01.05A)(3)

REVISIONS

— NONE —

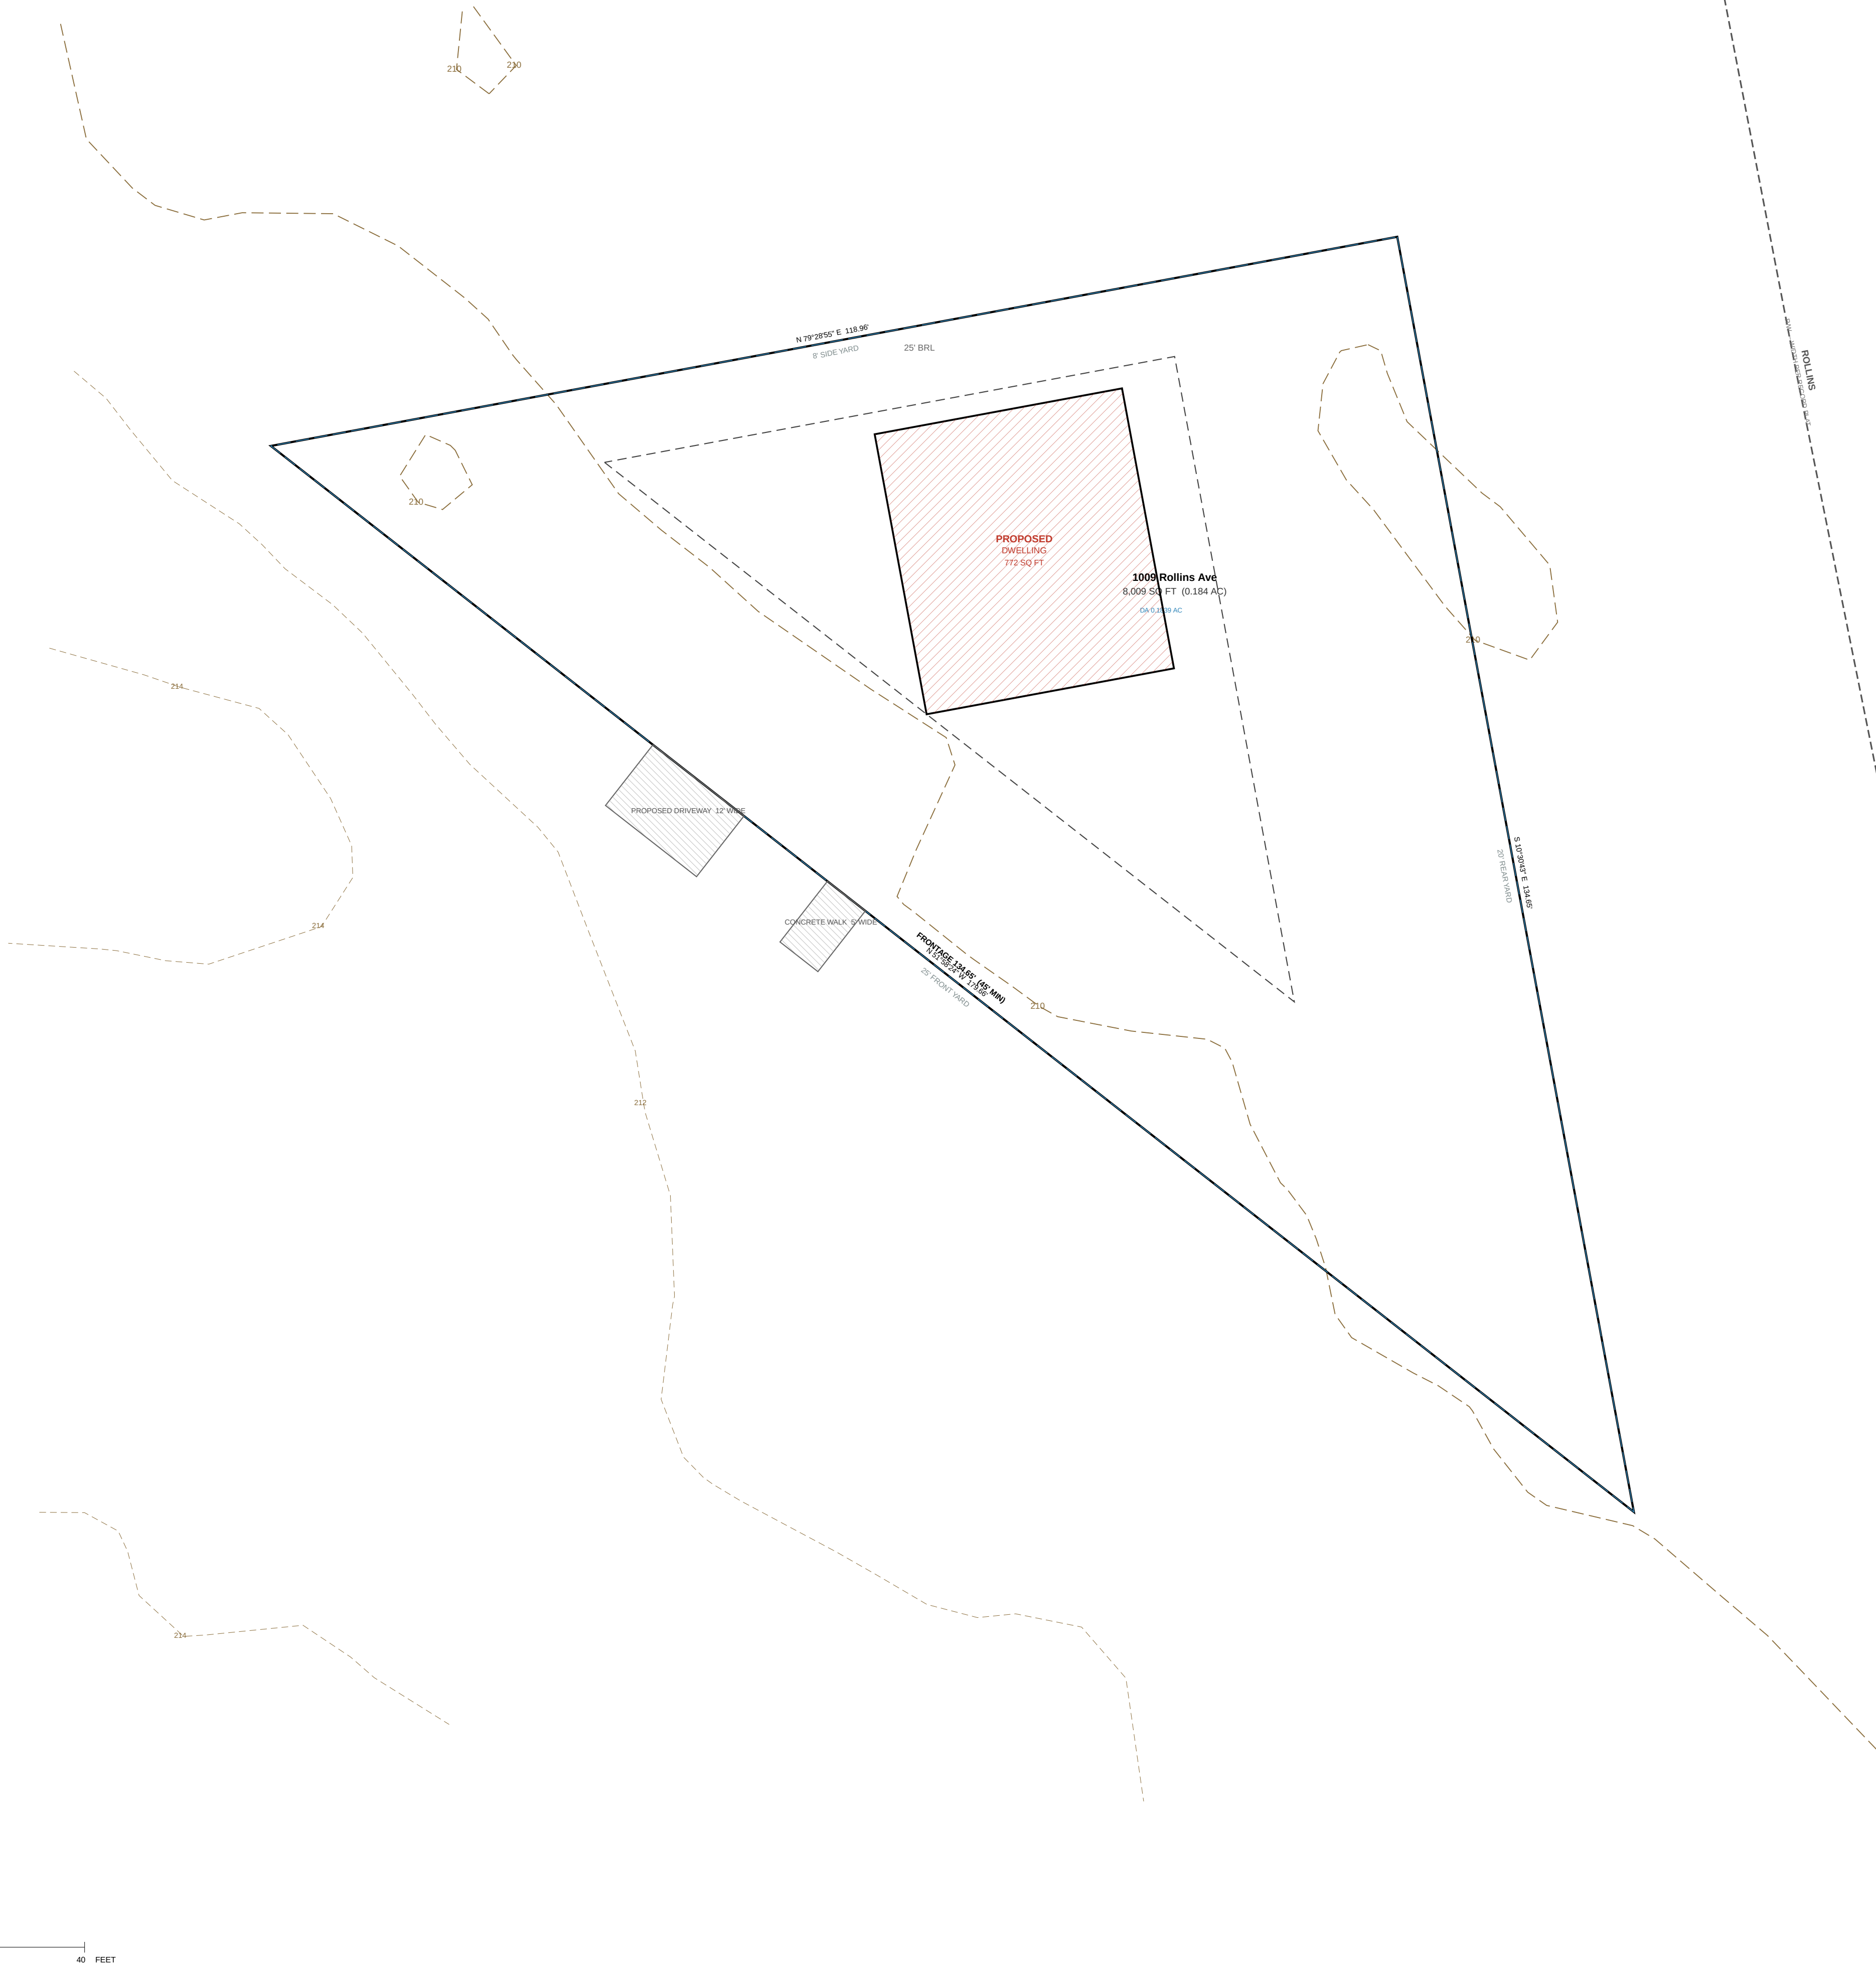

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-500 — Utility Plan
SCALE
1" = 10'
STATUS
PRELIMINARY
SHEET NO.
6 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32.106.
 - PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD

Porter Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASES OF RECORDS: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this platting.

LEGEND

- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT

PRINCE GEORGES'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE DATE

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS

— NONE —

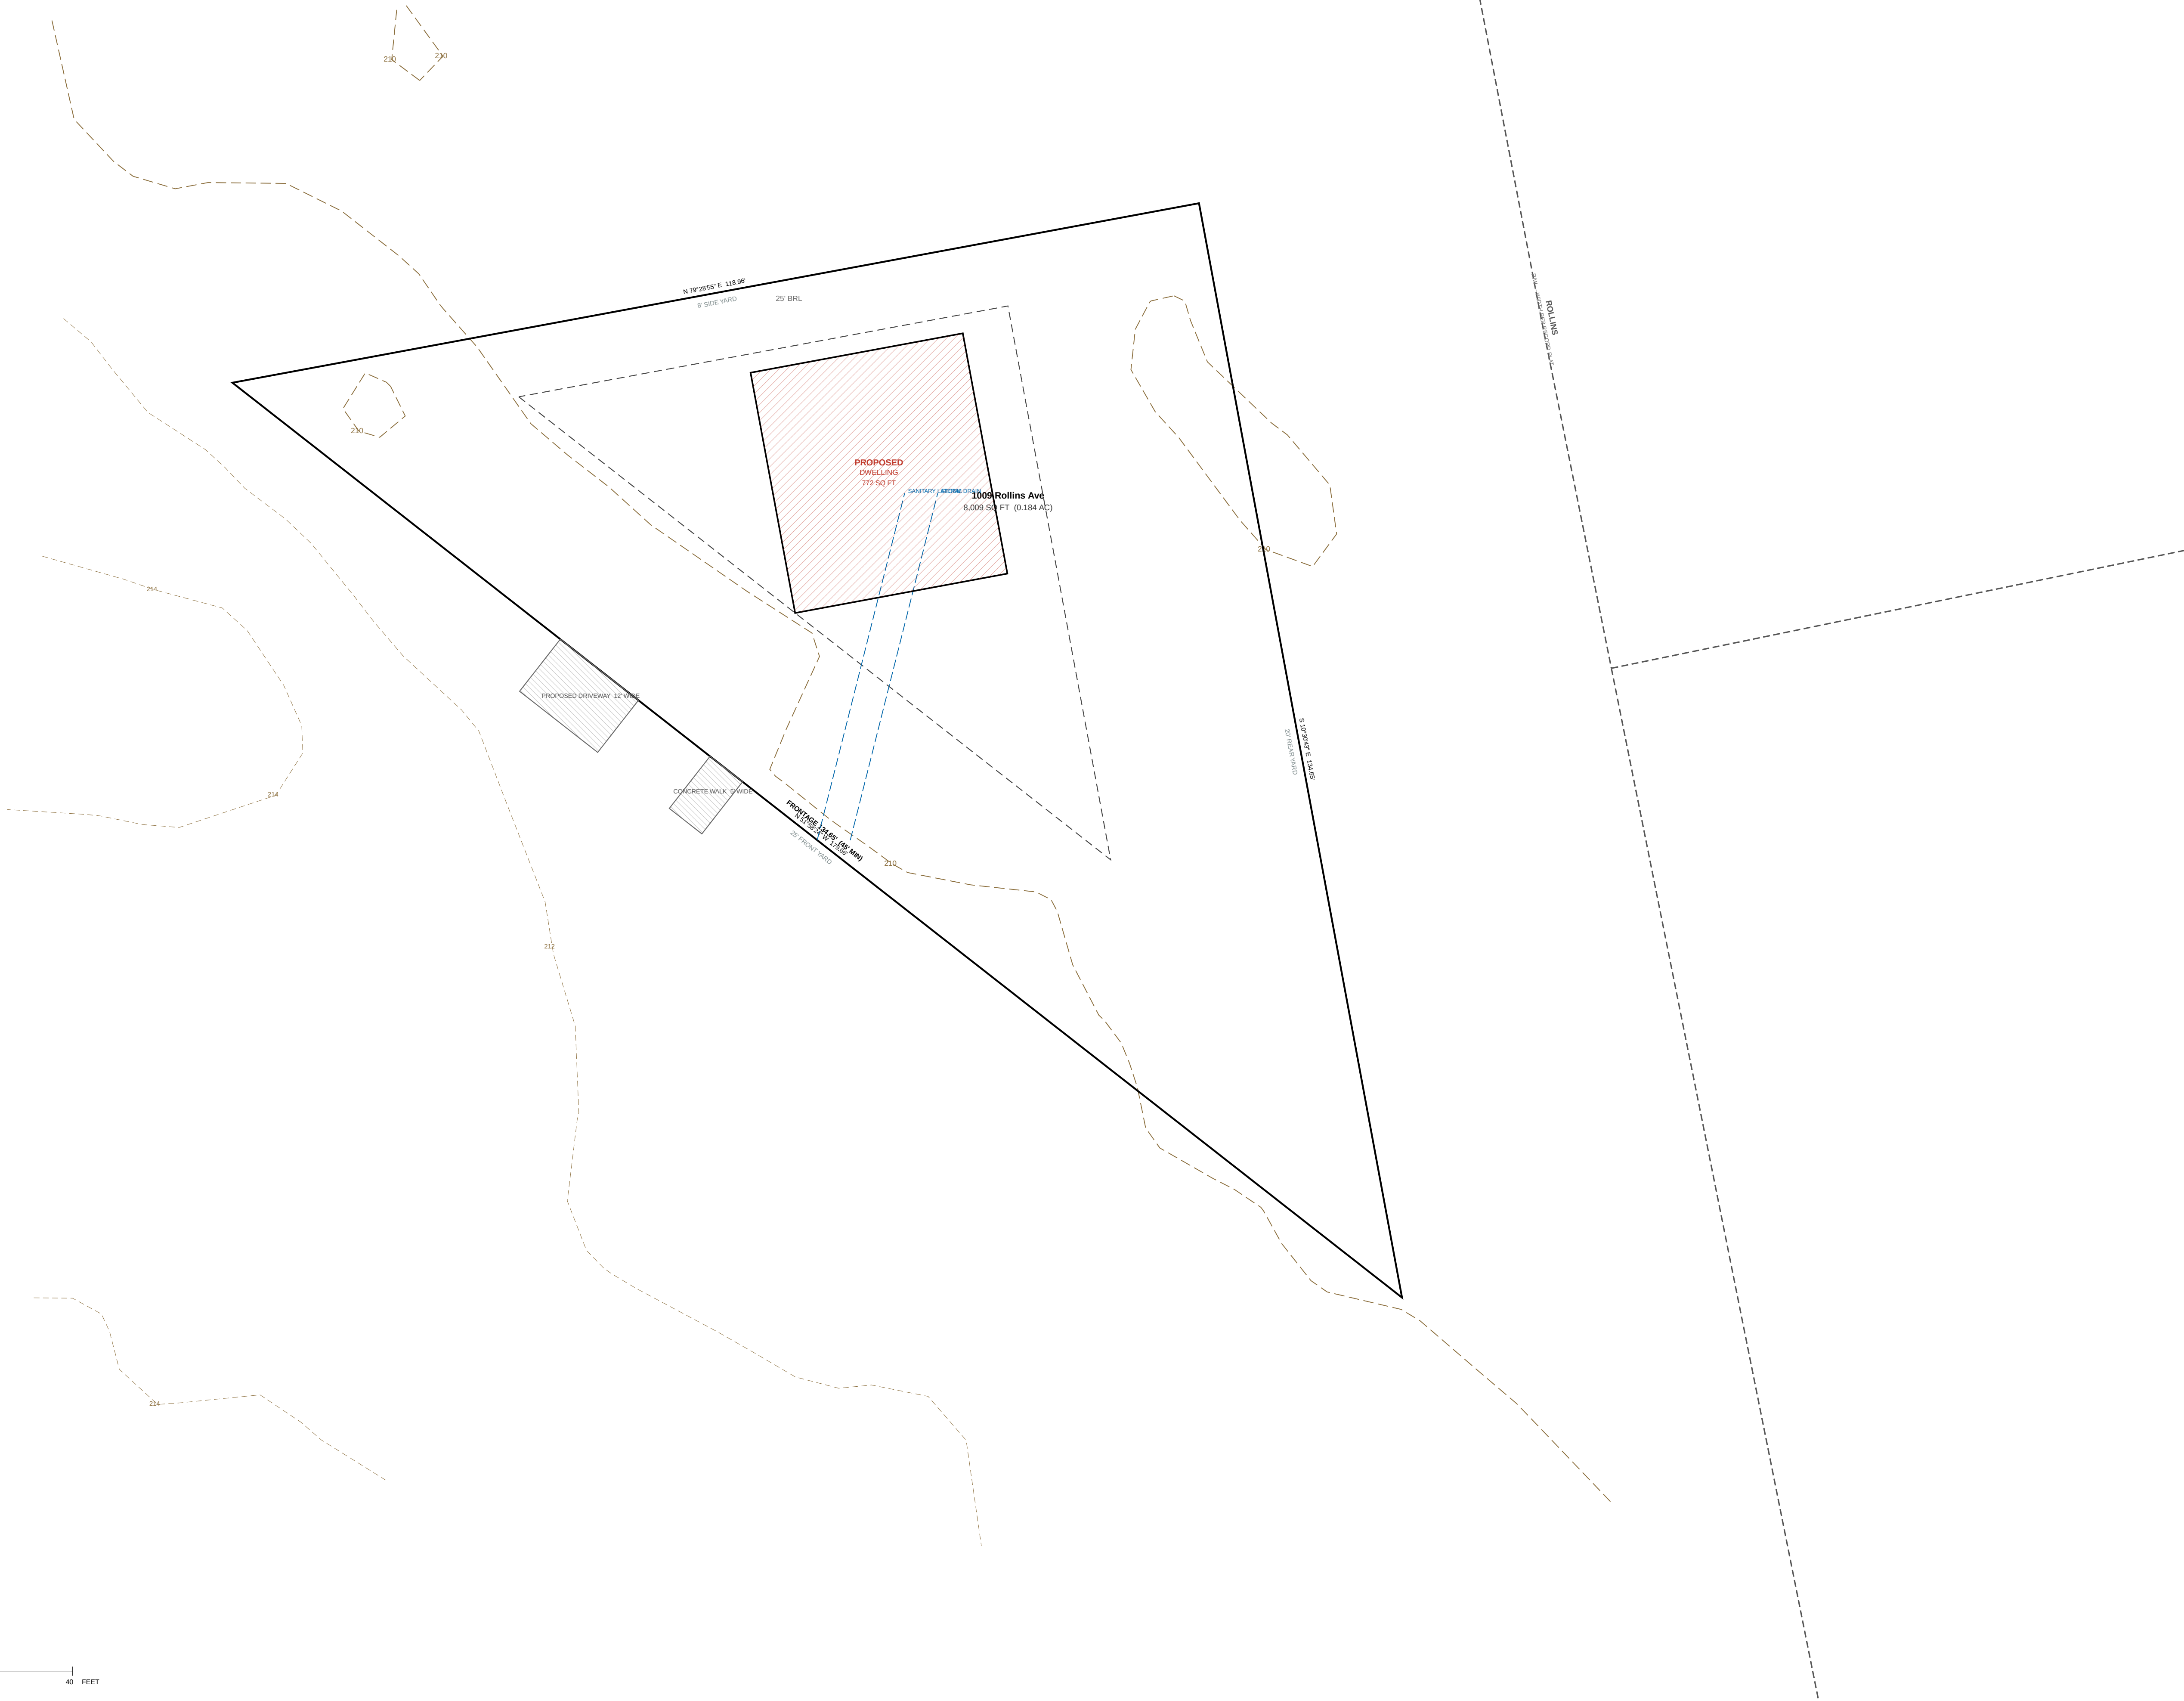

GRAPHIC SCALE — 1" = 10'

0 10 20 30 40 FEET

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave

ADDRESS
1009 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-600 — Stormwater Management Plan

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
7 OF 11

COORDINATES
EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Preconstruction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32.106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

PLAT OF RECORD	
Porter Subdivision, Plat Book PM 231 p.50	
NOTES OF RECORD	
1. BASIS OF RECORDING: Maryland State Plane Coordinate System (NAD 83).	
2. BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.	
3. A transcription is not a field survey. Monumentation is not verified here.	

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this plan.

LEGEND	
-----	PROPERTY BOUNDARY
-----	BRL — BUILDING RESTRICTION LINE
-----	PROPOSED STRUCTURE
-----	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
-----	STREET CENTRELINE
-----	PROPOSED PAVEMENT — DRIVEWAY / WALK
-----	EASEMENT



PRINCE GEORGES'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

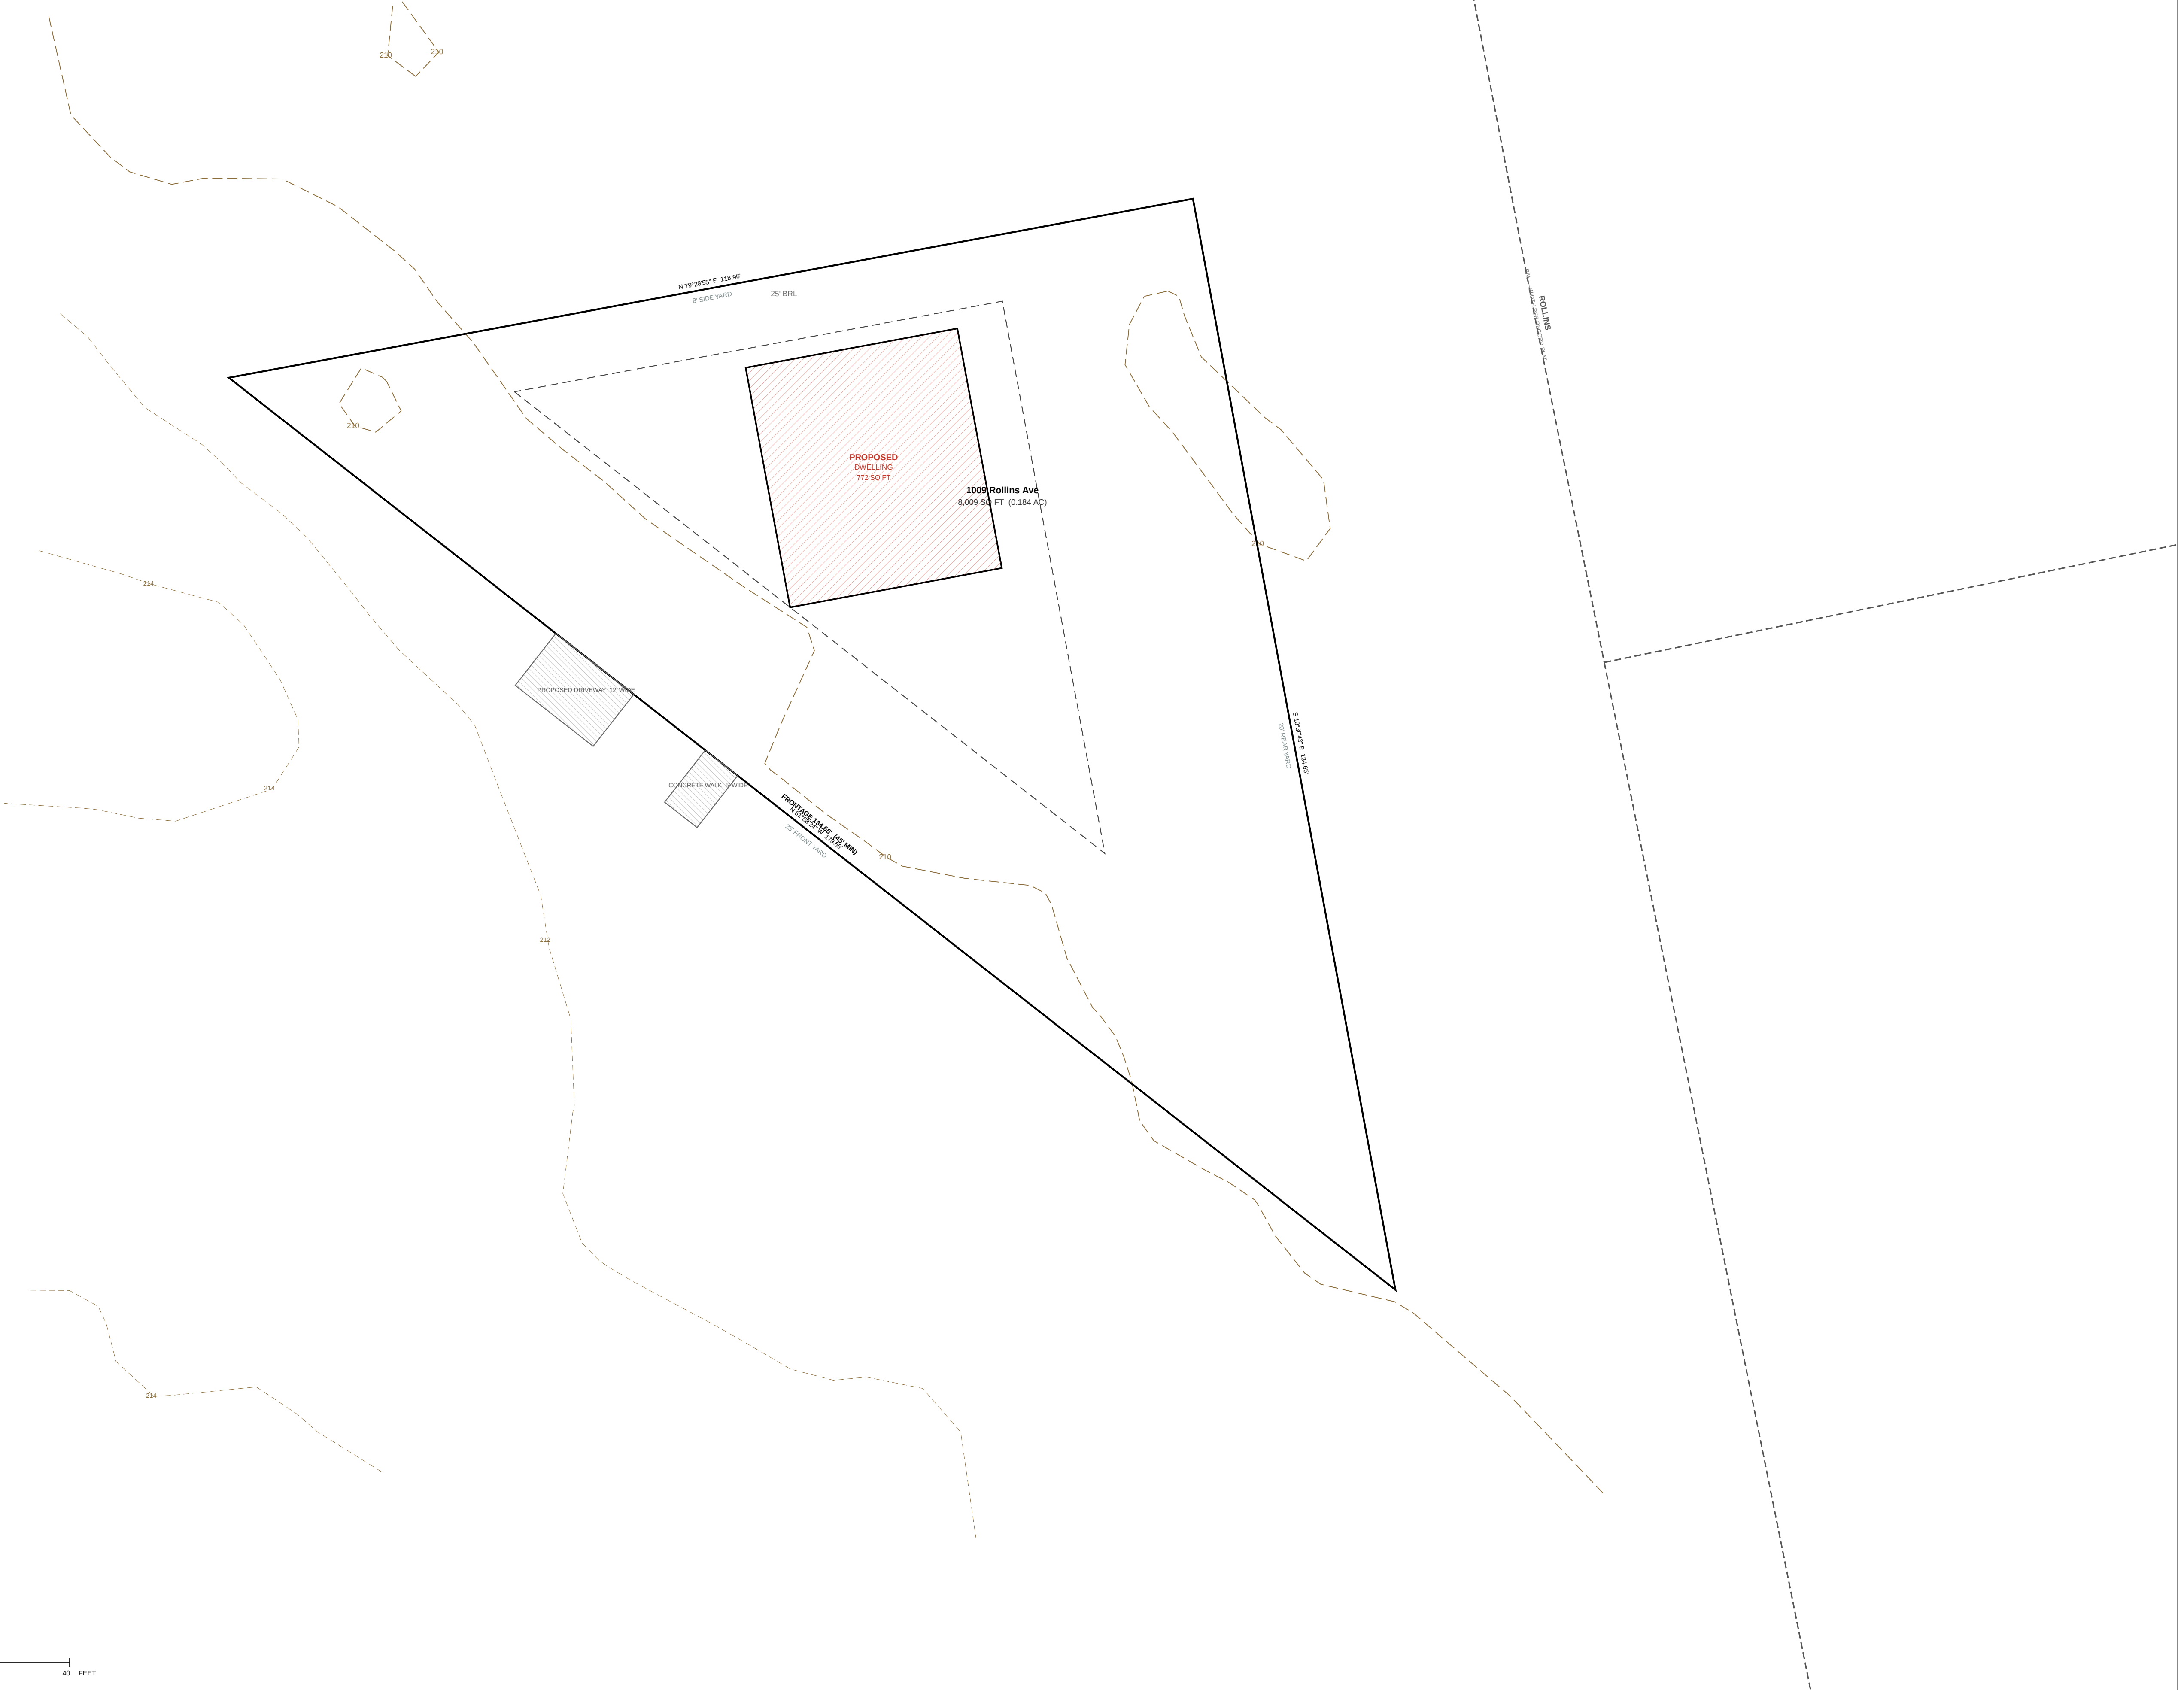

KEALEE

design, build, deliver

PROJECT

1009 Rollins Ave

ADDRESS

1009 Rollins Ave

JURISDICTION

prince georges md

ZONE

RSF-65

SHEET

C-700 — Sediment and Erosion Control Plan

SCALE

1" = 10'

STATUS

PRELIMINARY

SHEET NO.

8 OF 11

COORDINATES

EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS	
1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

- GENERAL NOTES**
- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
 - ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 22.106.
 - PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.
 - ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
 - BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

- PLAT OF RECORD**
- Porter Subdivision, Plat Book PM 231 p.50
- NOTES OF RECORD**
- BASES OF RECORDS: Maryland State Plane Coordinate System (NAD 83).
 - BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.
 - A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this plan.

- LEGEND**
- PROPERTY BOUNDARY
 - BRL — BUILDING RESTRICTION LINE
 - PROPOSED STRUCTURE
 - EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - STREET CENTRELINE
 - PROPOSED PAVEMENT — DRIVEWAY / WALK
 - EASEMENT

PRINCE GEORGES COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

STABILIZATION COMPLIANCE PREAMBLE

Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.01 by January 9, 2013, regardless of when an erosion and sediment control plan was approved.

COMAR 26.17.01.03(2), Governing body of approved plans.



STANDARD STABILIZATION NOTE


Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 1:1 vertical (3:1 and 5:1 and 5:1); seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

2013 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01.03A(2)).

REVISIONS

— NONE —

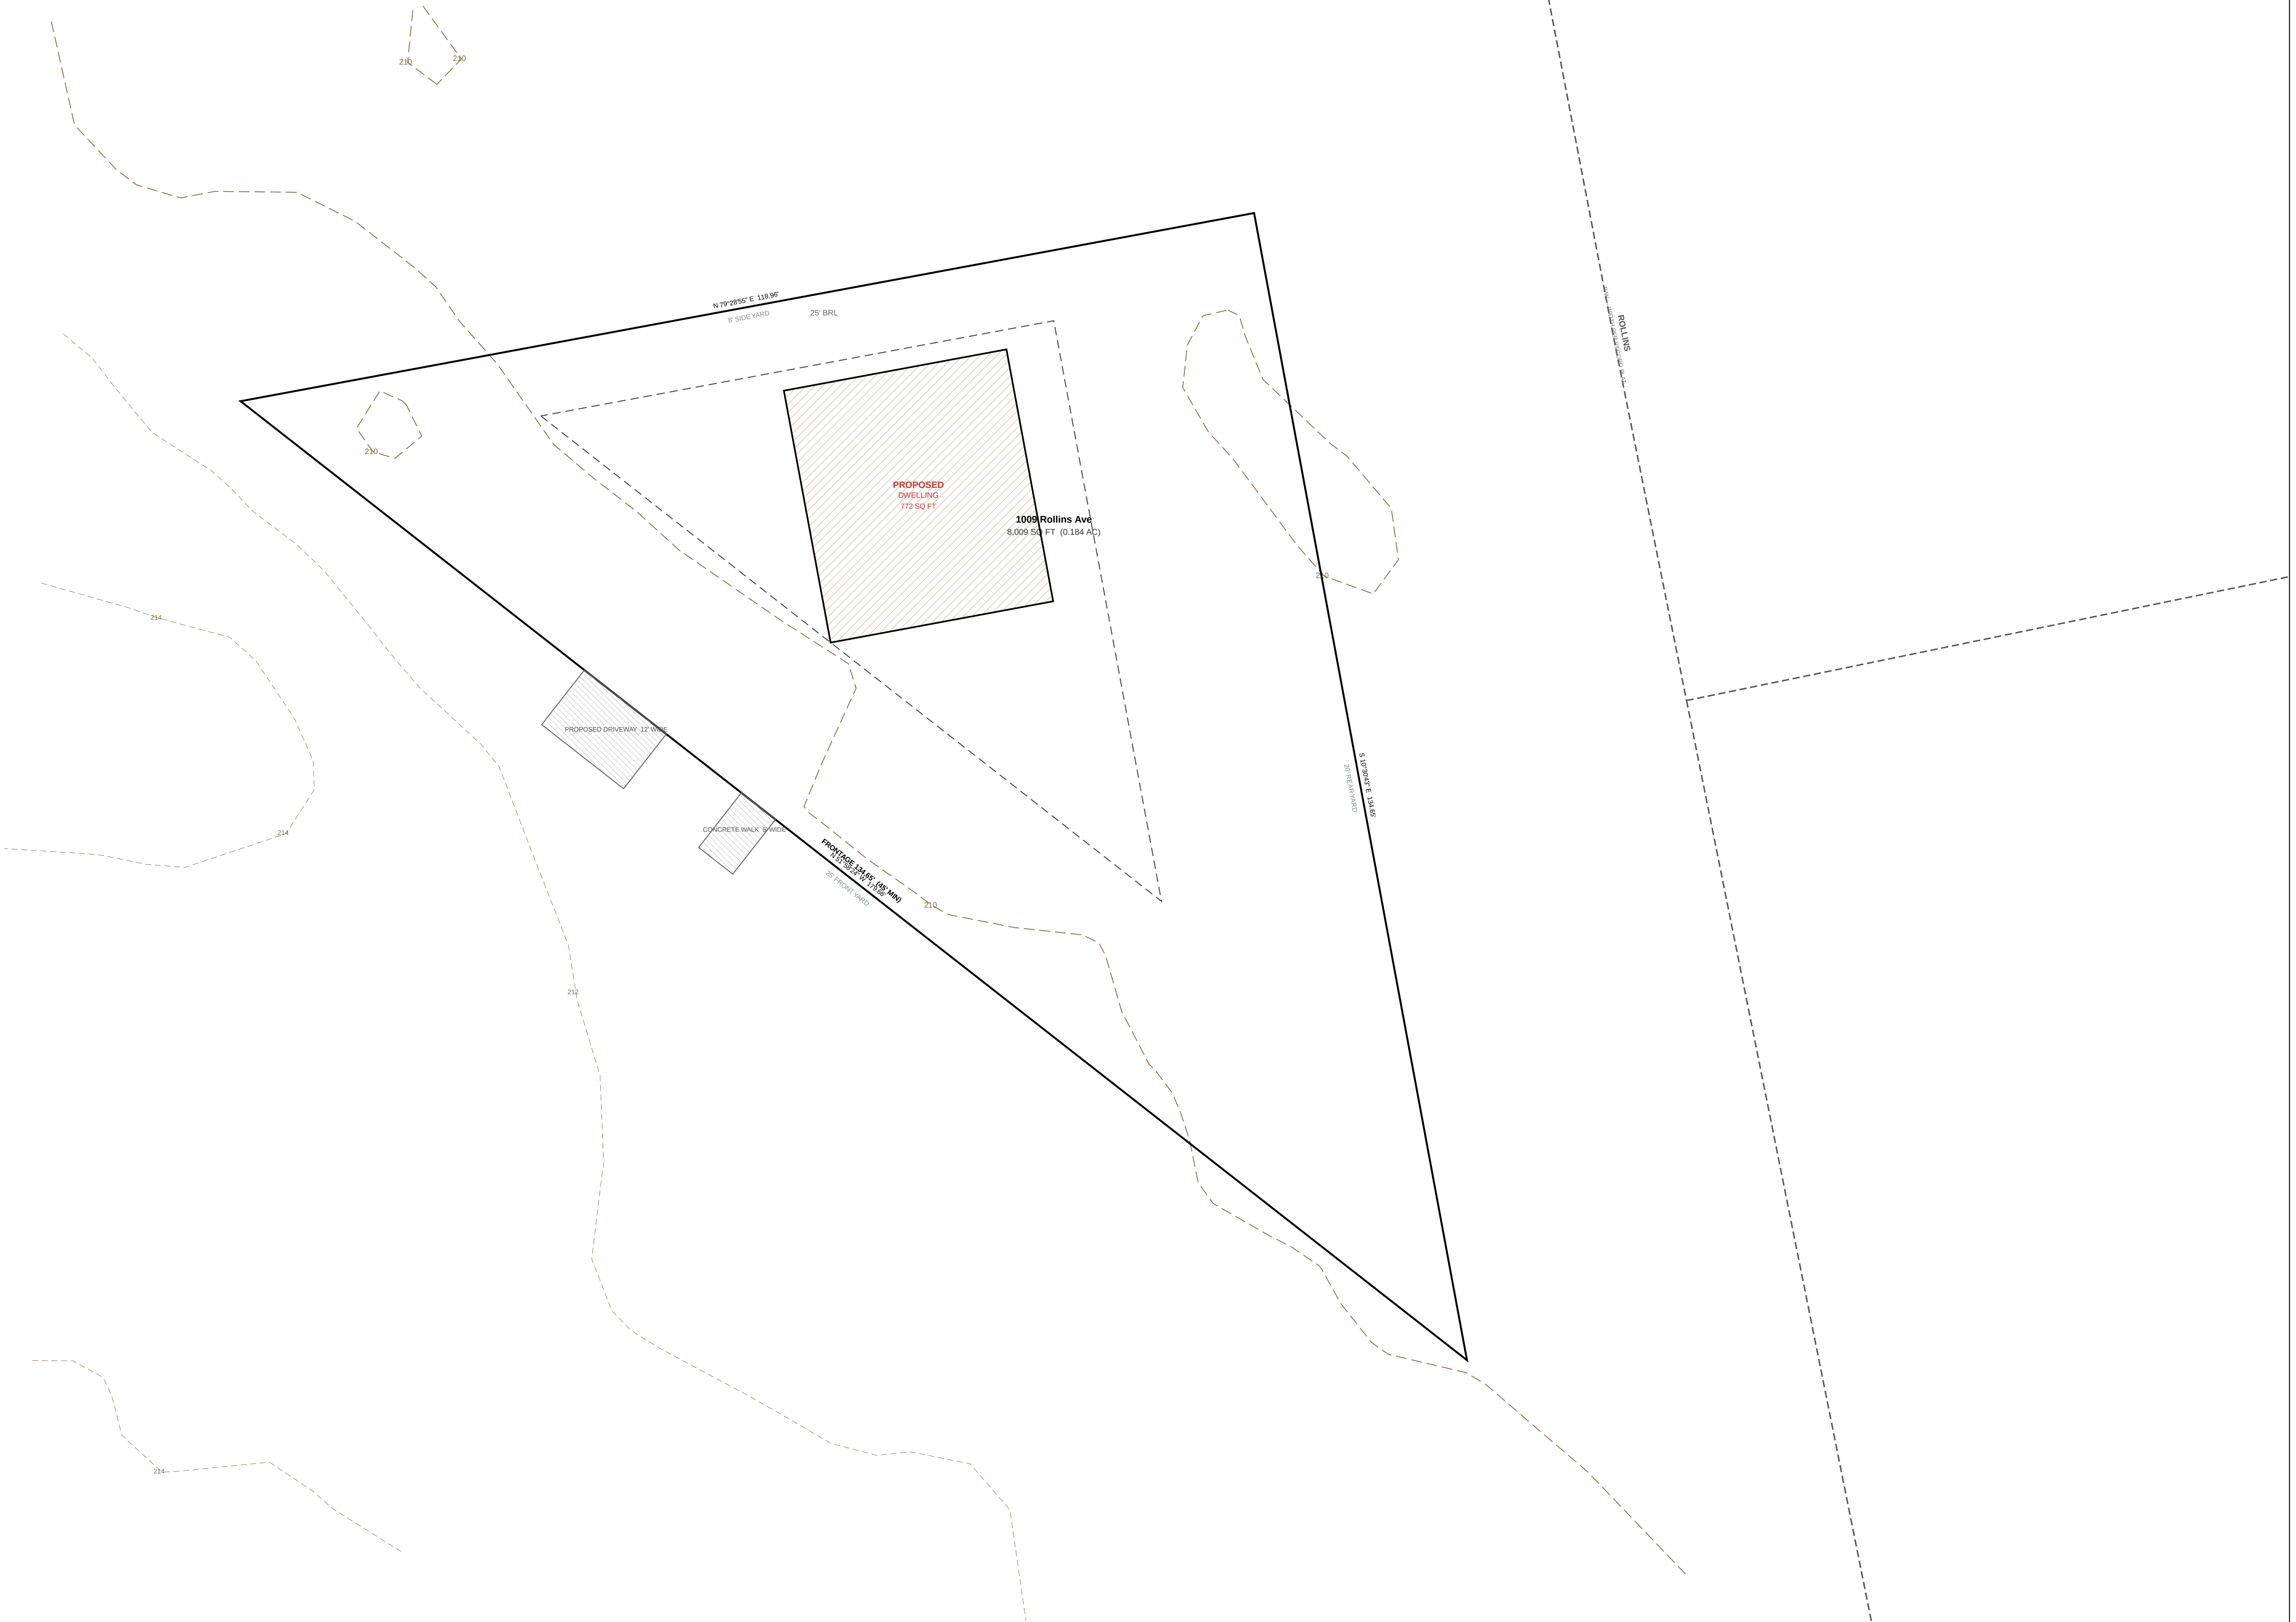

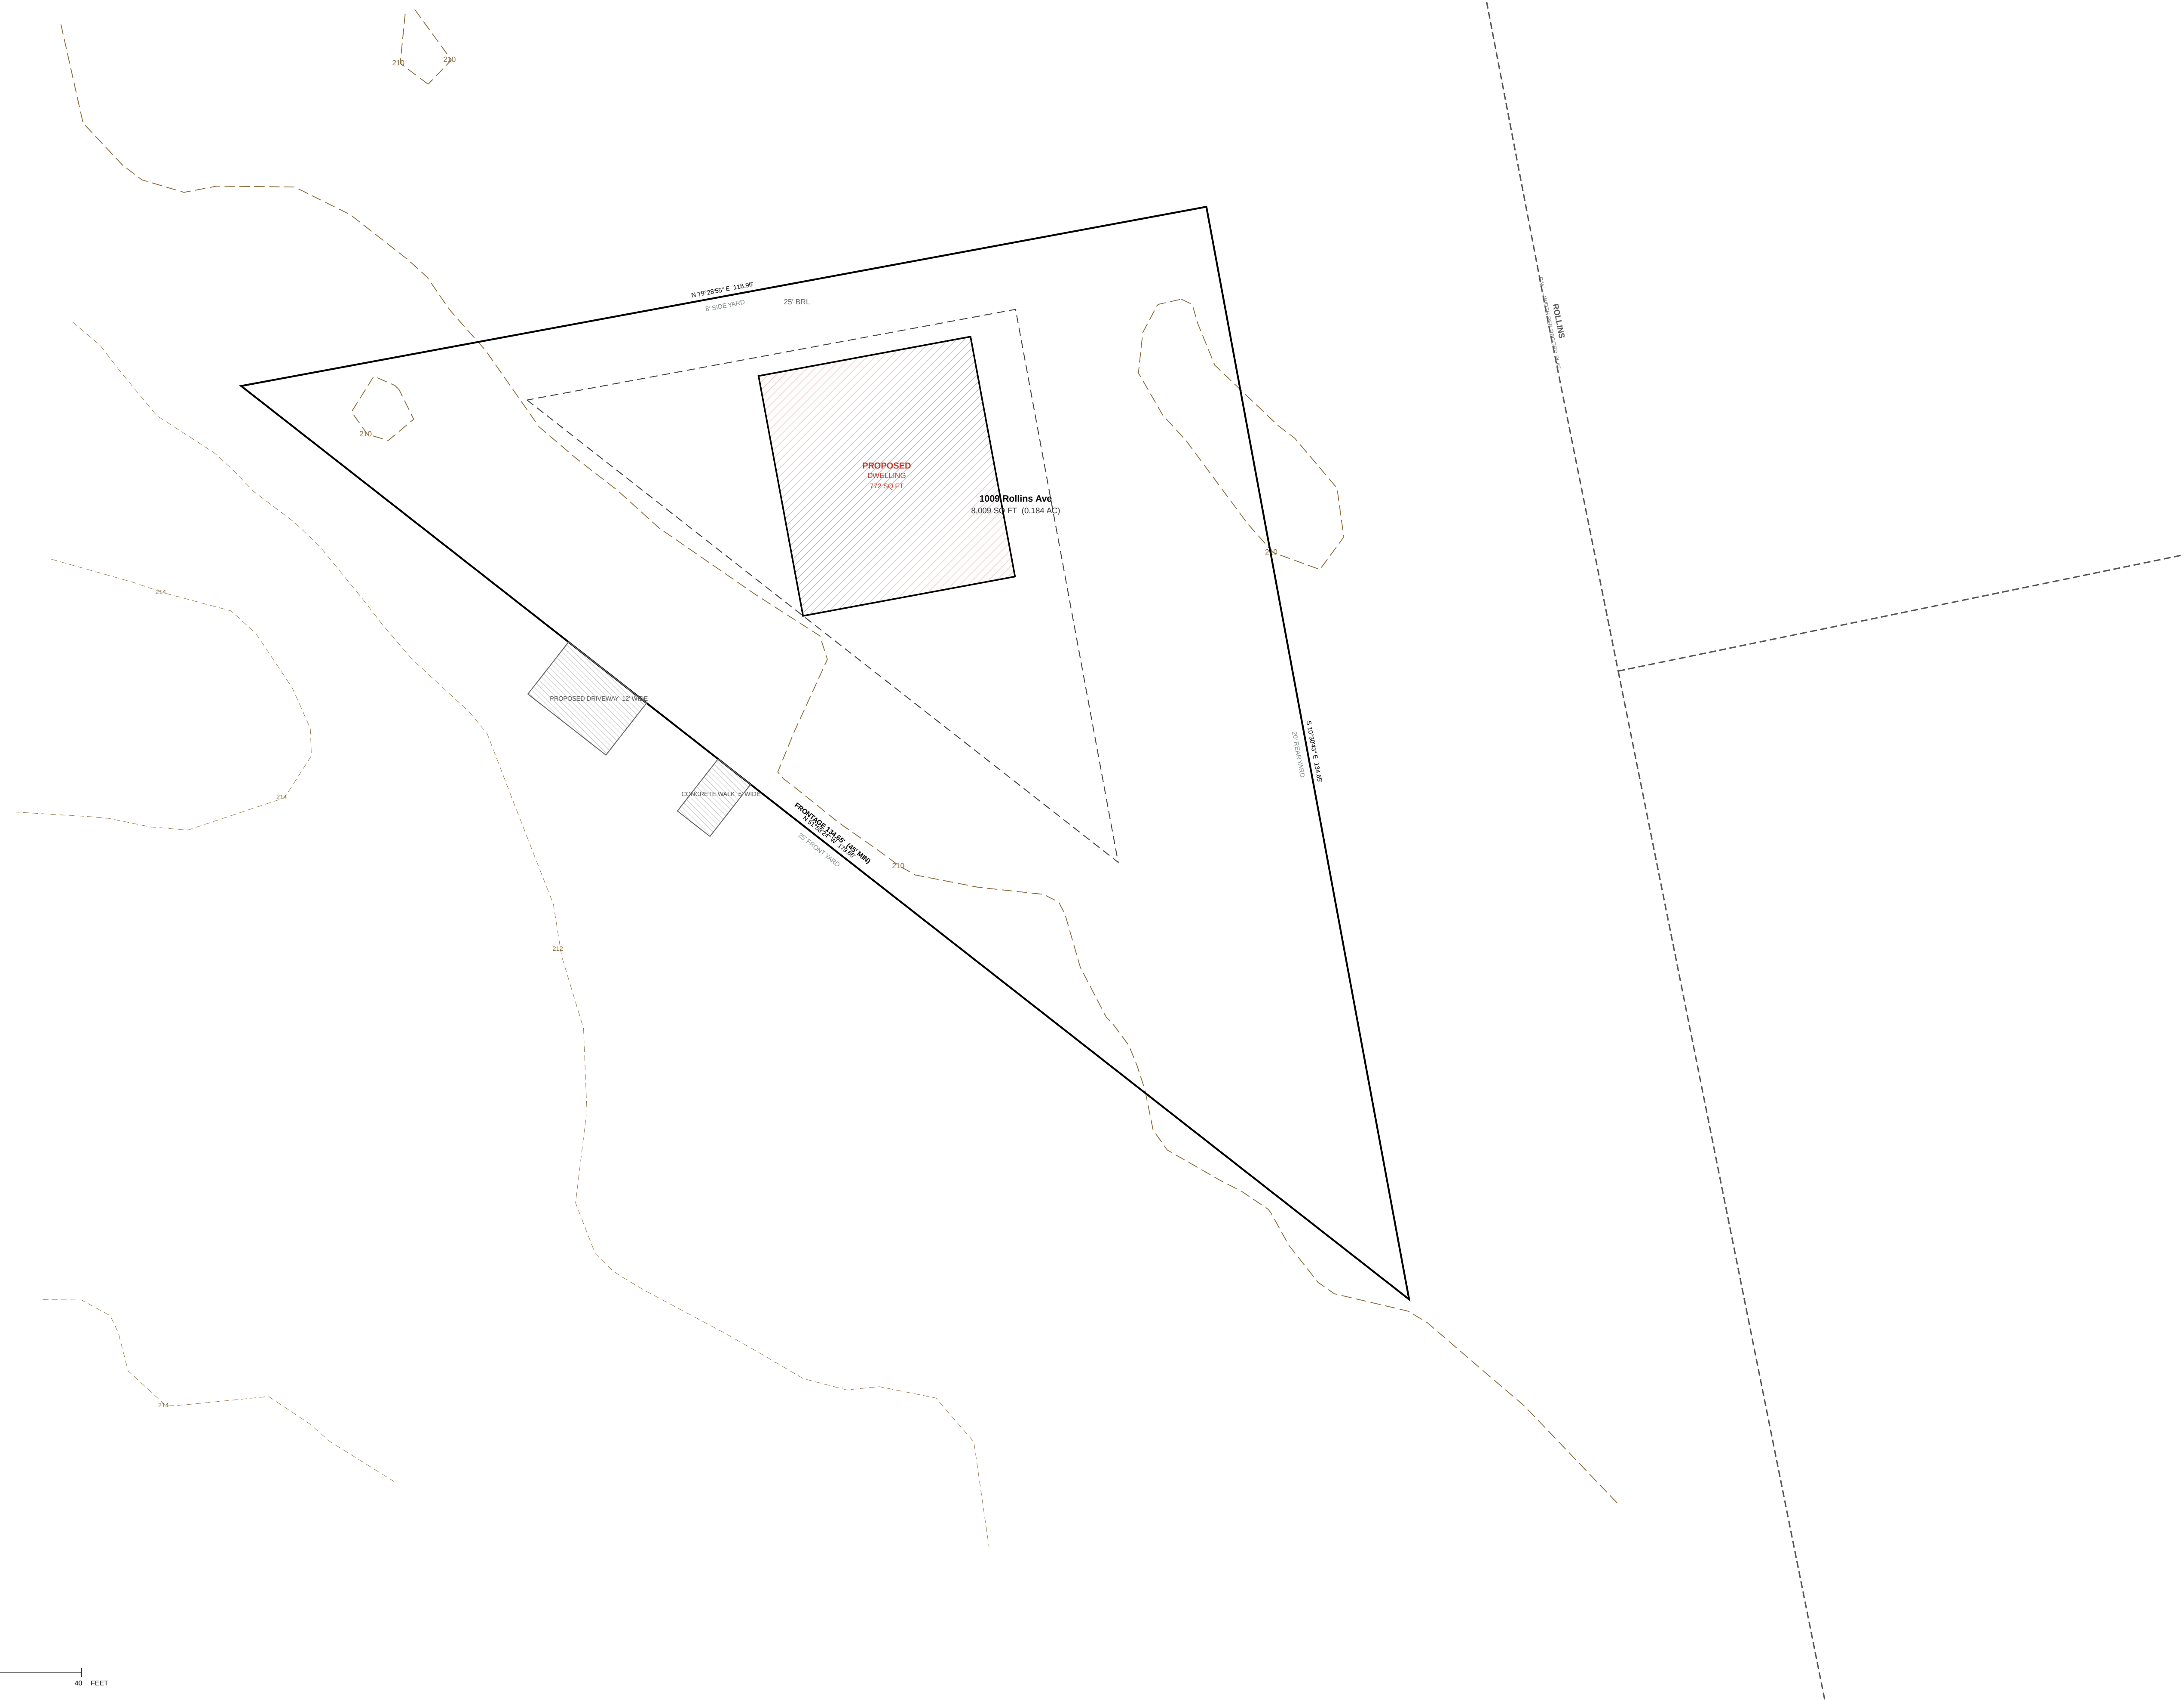

KEALEE

design, build, deliver

PROJECT

1009 Rollins Ave

1009 Rollins Ave

JURISDICTION

prince georges m

ZONE
RSF-65

SHEET

C-800 — Road, Driveway and Paving Plan

SCALE
1" = 10'

STATUS

PRELIMINARY

SHEET NO.
0 OF 1

9 OF 12

COORDINATE SYSTEM
EPSG:2154

H: NADH

V: NAVD88 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG 2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS

1. Gross tract area	8,009 SF
2. Area of dwelling	772 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,009 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION

1. Pre-construction piling	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade; construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted by the inspector	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD

Porter Subdivision, Plat Book PM 231 p.5

NOTES OF RECORD

1. BASIS OF BEARINGS: Maryland State Plane Coordinate System (NAD 83).
2. BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.65705, 8509 S computed against 8,000 SF recorded.
3. A transcription is not a field survey. Monumentation is not verified here.

The surveyor certificate, owner dedication and approval signatures of the recorded plat are NOT reproduced here; they attach to that instrument, not to this drawing.

LEGEND

- PROPERTY BOUNDARY
 - - - - - BRL — BUILDING RESTRICTION LINE
 ——— PROPOSED STRUCTURE
 ——— EXISTING CONTOUR — PGATLAS 2 FT (2023). NAVD83
 - - - - - STREET CENTRELINE
 ——— PROPOSED PAVEMENT — DRIVEWAY / WALK
 - - - - - EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE _____ DATE _____

DPIE SITE/ROAD PLAN REVIEW DIVISION APPROVAL:

SIGNATURE _____ DATE _____

REVISIONS

— none —



KEALEE

design, build, deliver

PROJECT

1009 Rollins Ave

ADDRESS

1009 Rollins Ave

JURISDICTION

prince georges md

ZONE

RSF-65

SHEET

C-900 — Civil Details

SCALE

1" = 10'

STATUS

PRELIMINARY

SHEET NO.

10 OF 11

COORDINATES

EPSG:2248

H: NAD83

V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted by the inspector	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES		
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.		
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PCC CODE SEC. 32.106.		
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.		
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.		
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.		

PLAT OF RECORD	
Porter Subdivision, Plat Book PM 231 p.50	
NOTES OF RECORD	
1. BASIS OF BEARINGS: Maryland State Plane Coordinate System (NAD 83).	
2. BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.65706, 8009 SF computed against 8,008 SF recorded.	
3. A transcription is not a field survey. Monumentation is not verified here.	

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in the monumentation, not in this platting.

LEGEND		
— — — — —	PROPERTY BOUNDARY	
- - - - -	BRL — BUILDING RESTRICTION LINE	
— — — — —	PROPOSED STRUCTURE	
— — — — —	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83	
- - - - -	STREET CENTRELINE	
— — — — —	PROPOSED PAVEMENT — DRIVEWAY / WALK	
- - - - -	EASEMENT	

PRINCE GEORGES'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL



SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE	DATE
-----------	------

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE	DATE
-----------	------

REVISIONS	
—	NOTE —

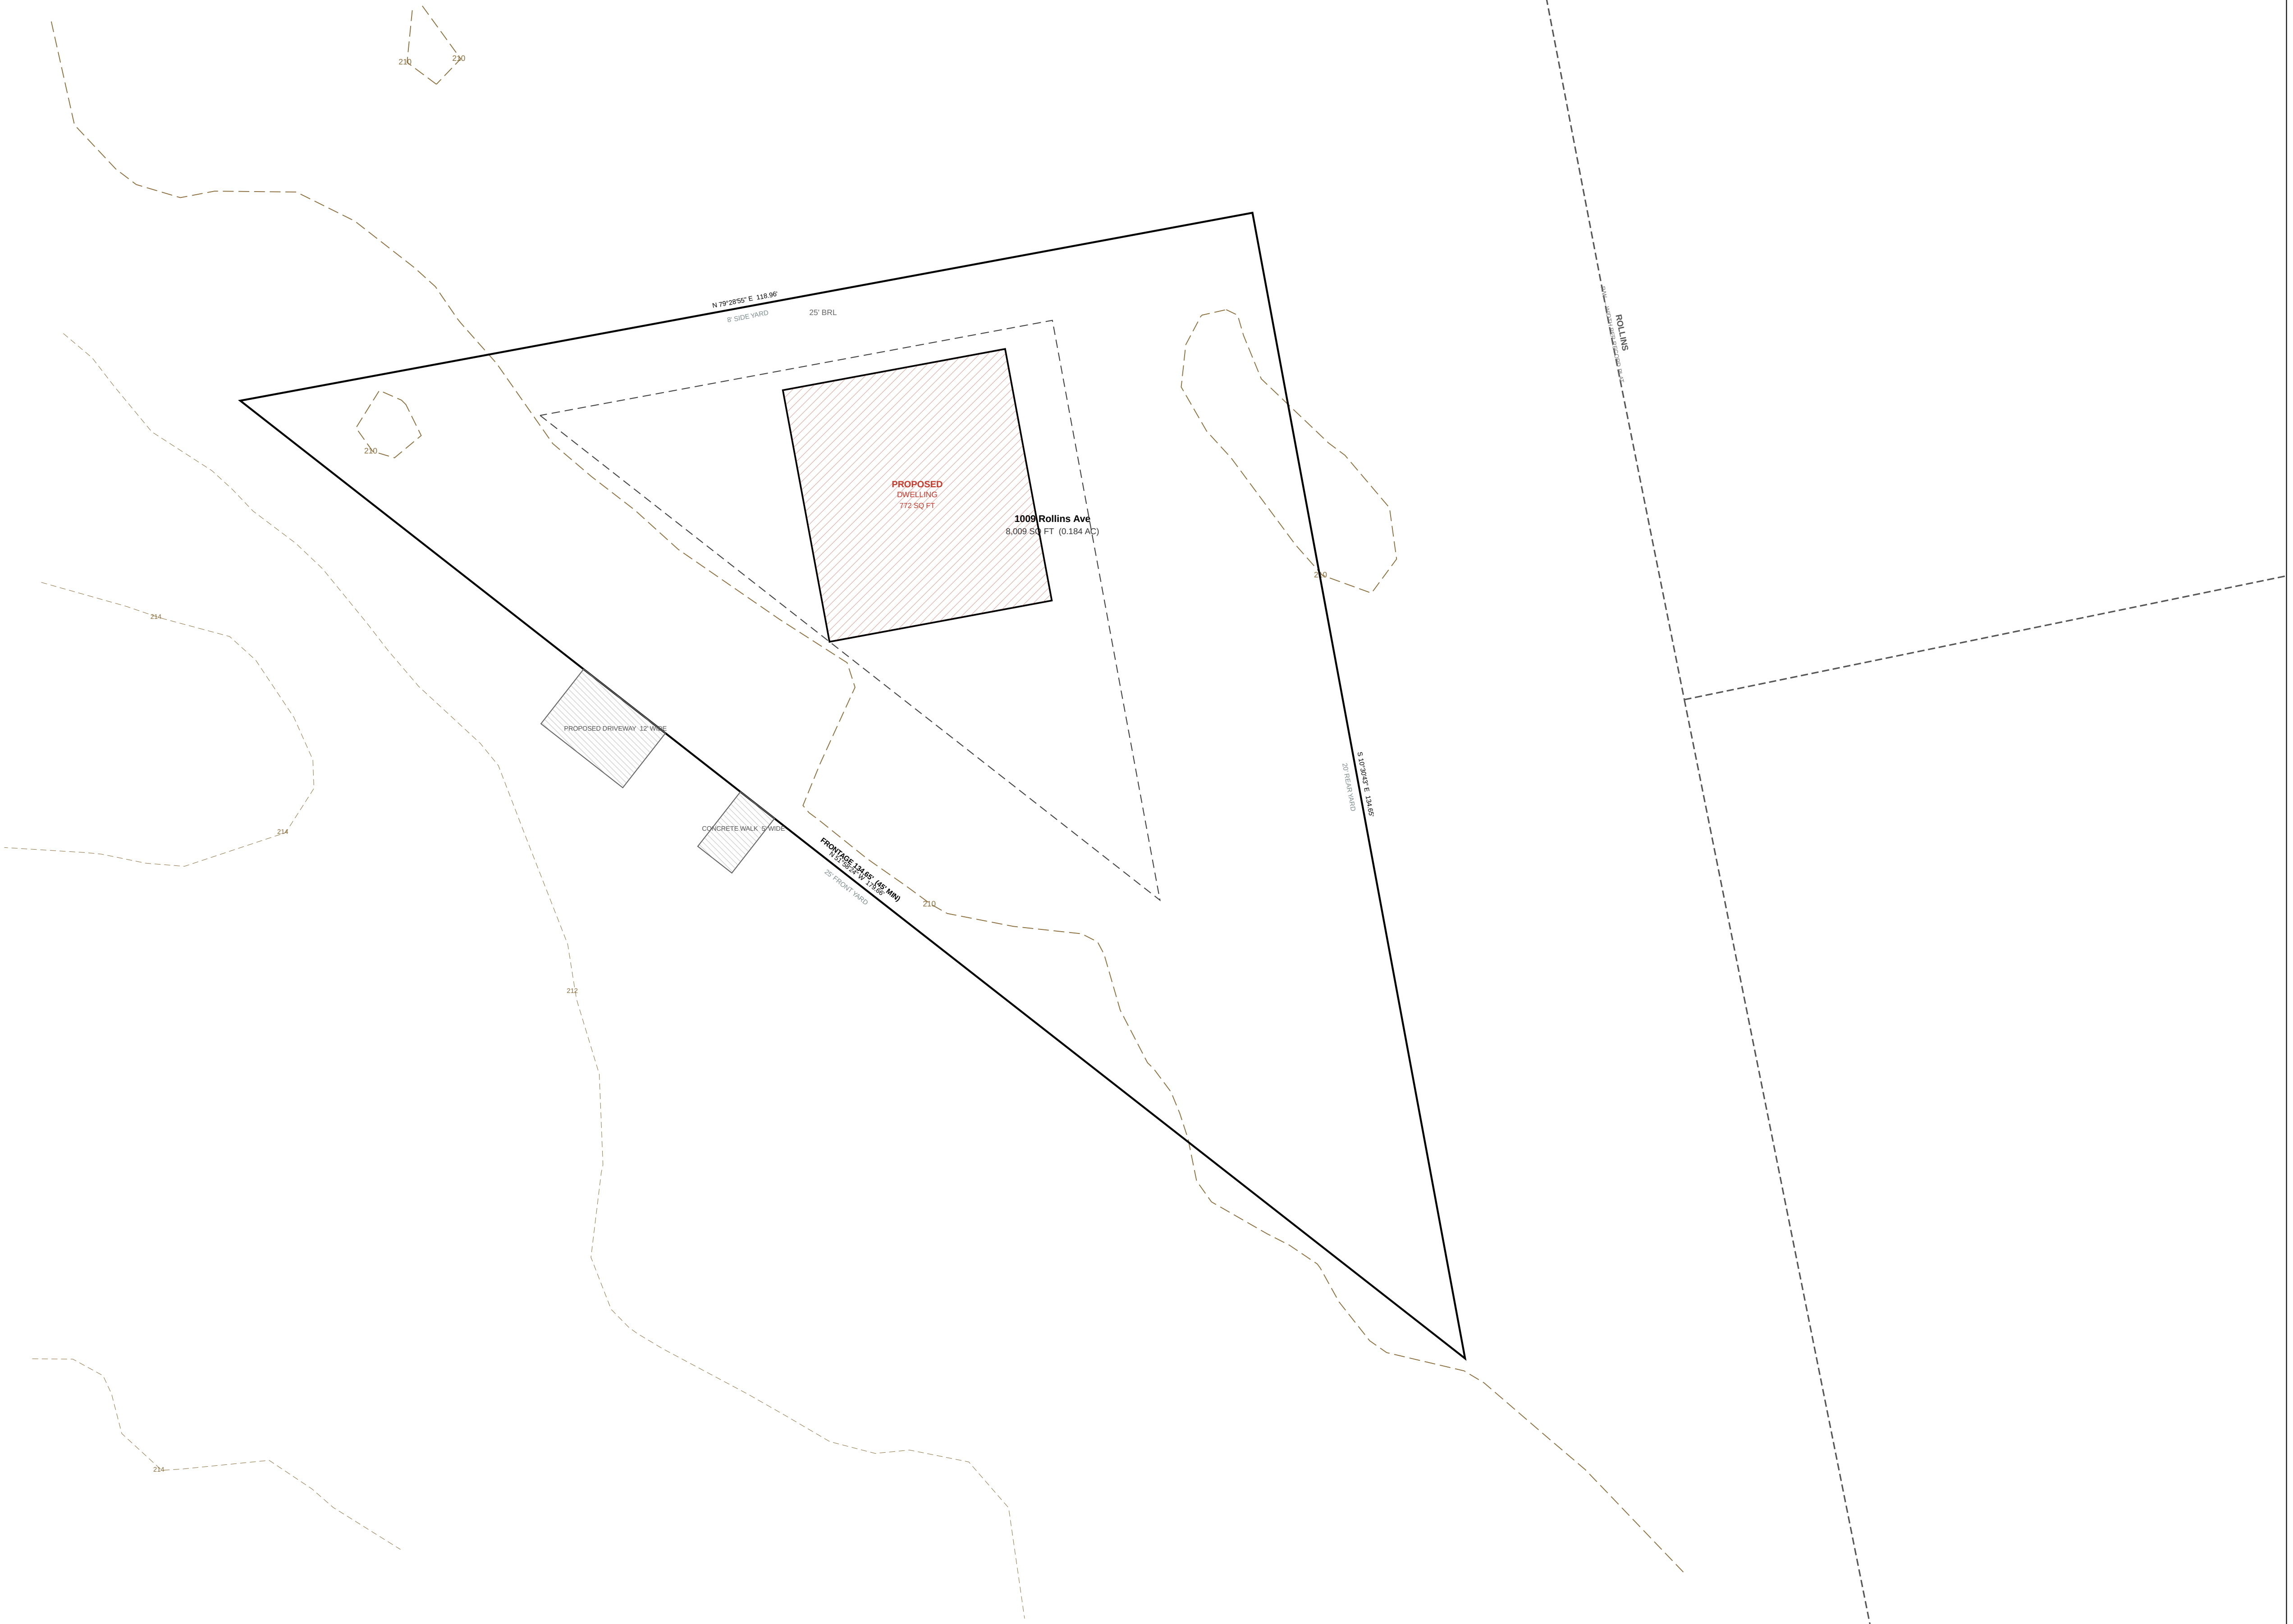

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 10'
STATUS
PRELIMINARY
SHEET NO.
11 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	1009 Rollins Ave	
GROSS LOT AREA	8,009 SF	0.184 AC
LOT FRONTAGE	45' MIN	134.65'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	9.6%
BUILDING FOOTPRINT	—	772 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD83 (feet)	

SITE ANALYSIS		
1. Gross tract area	8,009 SF	
2. Area of dwelling	772 SF	
3. Wooded area	NOT ESTABLISHED	
4. Floodplain area	NOT ESTABLISHED	
5. Net tract area	8,009 SF	
6. TOTAL AREA DISTURBED	NOT QUANTIFIED	

SEQUENCE OF CONSTRUCTION		
1. Preconstruction meeting		1 DAY
2. Obtain necessary permits		2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation		1 DAY
4. Construct stabilized construction entrance and perimeter sediment control		2 DAYS
5. Rough grade, construct dwelling, utilities and driveway		12 MONTHS
6. Fine grade and stabilize all disturbed areas		1 DAY
7. Remove sediment control devices when written permission has been granted		1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS		

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 3D.106.
- PROPOSED GRADE: SHOWN SOLID; EXISTING GRADE: SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

PLAT OF RECORD
Porter Subdivision, Plat Book PM 231 p.50

NOTES OF RECORD

- BASES OF RECORD: Maryland State Plane Coordinate System (NAD 83).
- BOUNDARY OF RECORD transcribed from the recorded plat; traverse closes 1.60708, 8009 SF computed against 8,009 SF recorded.
- A transcription is not a field survey. Monumentation is not verified here.

The surveyor certifies, under declaration and approval signatures of the recorded plat are NOT reproduced here; they appear in that instrument, not in this plan.

LEGEND

- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT

PRINCE GEORGES'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS
— NONE —

