



KEALEE

Design. Build. Deliver

PROJECT
3210 NEWARK STREET NW
ADDRESS
3210 NEWARK STREET NW
JURISDICTION
District of Columbia
ZONE
R-1B
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
1 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)
PROFESSIONAL RESPONSIBILITY
District of Columbia Licensed Surveyor
certifies: boundary_determination, topographic_survey

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-100 — Existing Conditions and Boundary Plan
DISCIPLINE District of Columbia Licensed Surveyor
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA	
ZONE	R-1B
TAX / PARCEL ID	2079 0060
GROSS TRACT AREA	10,000 SF 0.230 AC
LOT FRONTAGE	— 50.00'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	15' 15'
SIDE YARD	8' 8'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 12.0%
BUILDING FOOTPRINT	— 1,200 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	10,000 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	10,000 SF
6. TOTAL AREA DISTURBED	5,649 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH DOE

BUILDING DATA

	G	B	FF	SF	HT	STY
3210 NEWARK STREET NW	—	—	—	—	20'	2

B: basement FF: finished floor SF: subfloor HT: height STY: storeys A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 14.6% impervious	10,000	0.230	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	10,000		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-lot paving	261		0.95
Pervious — lawn	8,539		0.25
Composite C			0.352
Flow path			206 ft
Flow path slope			21.3 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.77 in/hr
Peak discharge PRE, Q = CIA			0.39 cfs
Peak discharge POST, Q = CIA			0.55 cfs
INCREASE TO BE MANAGED			0.16 cfs
Rv = 0.05 + 0.0091			0.3315
Water quality volume WQv			151 cf

Time of concentration by Kirpich over a 206 ft flow path at 21.3%, taken from the 2 ft contours across the catchment. A 5-minute flow applies.
Rainfall intensity 6.77 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2, Ver. 3, PFDS point estimate, 38,9344 ft 77.0639 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. DOE's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Final grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01. NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE DISTRICT OF COLUMBIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —

SOILS TABLE

USDA NRCS SSURGO — survey area DC001, District of Columbia

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AsC	Ashe loam, 8 to 15 percent slopes	.32	No	B	Somewhat excessively drained
AsD	Ashe loam, 15 to 40 percent slopes	.32	No	B	Somewhat excessively drained
BdB	Beltsville silt loam, 0 to 8 percent slopes	.49	No	C	Moderately well drained
BeB	Beltsville Urban land complex, 0 to 8 percent slopes	.49	No	C	Moderately well drained
Bg	Bibb sandy loam	.28	Yes	B/D	Poorly drained
BrB	Bourne fine sandy loam, 0 to 8 percent slopes	.32	No	D	Moderately well drained
BrC	Bourne fine sandy loam, 8 to 15 percent slopes	.32	No	D	Moderately well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — District of Columbia — Office of the Surveyor / OCTO, Record Lots — DC...
Existing contours — District of Columbia — OCTO — Elevation/MapServer/3 — Topography 2 Foot Contours...

GRAPHIC SCALE — 1" = 30'

0 30 60 90 120 FEET



KEALEE

Design, build, deliver

PROJECT
3210 NEWARK STREET NW
ADDRESS
3210 NEWARK STREET NW
JURISDICTION
District of Columbia
ZONE
R-1B
SHEET
C-200 — Overall Site and Zoning Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
District of Columbia Professional Engineer
certifies: Site, layout

SEAL AND SIGNATURE

Architect

certifies: architectural_footprint

SEAL AND SIGNATURE

This sheet carries content from more than one professional discipline. Each seal below applies only to the subjects listed beside it. No professional certifies content outside their stated scope, and the sheet is not divided into separate drawings for that purpose.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-200 — Overall Site and Zoning Plan
DISCIPLINE District of Columbia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA		
ZONE	R-1B	
TAX / PARCEL ID	2079 0060	
GROSS TRACT AREA	10,000 SF	0.230 AC
LOT FRONTAGE	—	50.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	15'	15'
SIDE YARD	6'	6'
REAR YARD	25'	25'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	40%	12.0%
BUILDING FOOTPRINT	—	1,200 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD88 (feet)	

SITE ANALYSIS

1. Gross tract area	10,000 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	10,000 SF
6. TOTAL AREA DISTURBED	5,649 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH DOEE

BUILDING DATA

	G	B	FF	SF	HT	STY
3210 NEWARK	—	—	—	—	20'	2
STREET NW	8' basement · FF finished floor · SF subfloor · HT height · STY storeys · A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.					

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 14.6% impervious	10,000	0.230	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	10,000		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-lot paving	261		0.95
Pervious — lawn	8,539		0.25
Composite C			0.352
Flow path			206 ft
Flow path slope			21.3 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.77 in/hr
Peak discharge PHE, Q = CIA			0.39 cfs
Peak discharge POST, Q = CIA			0.95 cfs
INCREASE TO BE MANAGED			0.16 cfs
Rv = 0.05 + 0.0081			0.1815
Water quality volume WQv			151 cf

Time of concentration by Kirpich over a 206 ft flow path at 21.3%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.77 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3. PFDS point estimate, 38.0344 N 77.0639 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. DOEE's rain stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

LEGEND

—	PROPERTY BOUNDARY
—	BRL — BUILDING RESTRICTION LINE
—	PROPOSED STRUCTURE
- - -	EXISTING CONTOUR — 2 FT INTERVAL, NAVD88
—	PROPOSED CONTOUR — 2 FT INTERVAL
—	STREET CENTRELINE
—	PROPOSED PAVEMENT — DRIVEWAY / WALK
—	EASEMENT
—	SANITARY LATERAL (SHC) — HEAVIEST
—	WATER SERVICE (WNC)
—	STORM DRAIN — TRUNK, RCP
—	STORM — HOUSE CONNECTION TO TRUNK
—	DRAINAGE SWALE — INVERT AND GRADED SECTION
—	RETAINING WALL — TICKS ON THE RETAINED SIDE
- - -	LIMIT OF GROUND COVER — TICKS ON THE STEEP SIDE
—	ESD — STORMWATER PRACTICE

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE DISTRICT OF COLUMBIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —



SOILS TABLE

USDA NRCS SSURGO — survey area DC001, District of Columbia

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AsC	Ashe loam, 8 to 15 percent slopes	.32	No	B	Somewhat excessively drained
AsD	Ashe loam, 15 to 40 percent slopes	.32	No	B	Somewhat excessively drained
BdB	Beltsville silt loam, 0 to 8 percent slopes	.49	No	C	Moderately well drained
BeB	Beltsville Urban land complex, 0 to 8 percent slopes	.49	No	C	Moderately well drained
Bg	Bibb sandy loam	.28	Yes	B/D	Poorly drained
BtB	Bourne fine sandy loam, 0 to 8 percent slopes	.32	No	D	Moderately well drained
BtC	Bourne fine sandy loam, 8 to 15 percent slopes	.32	No	D	Moderately well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — District of Columbia — Office of the Surveyor / OCTO Record Lots — DC...
Existing contours — District of Columbia — OCTO — Elevation/MapServer/3 — Topography 2 Foot Contours...

GRAPHIC SCALE — 1" = 30'

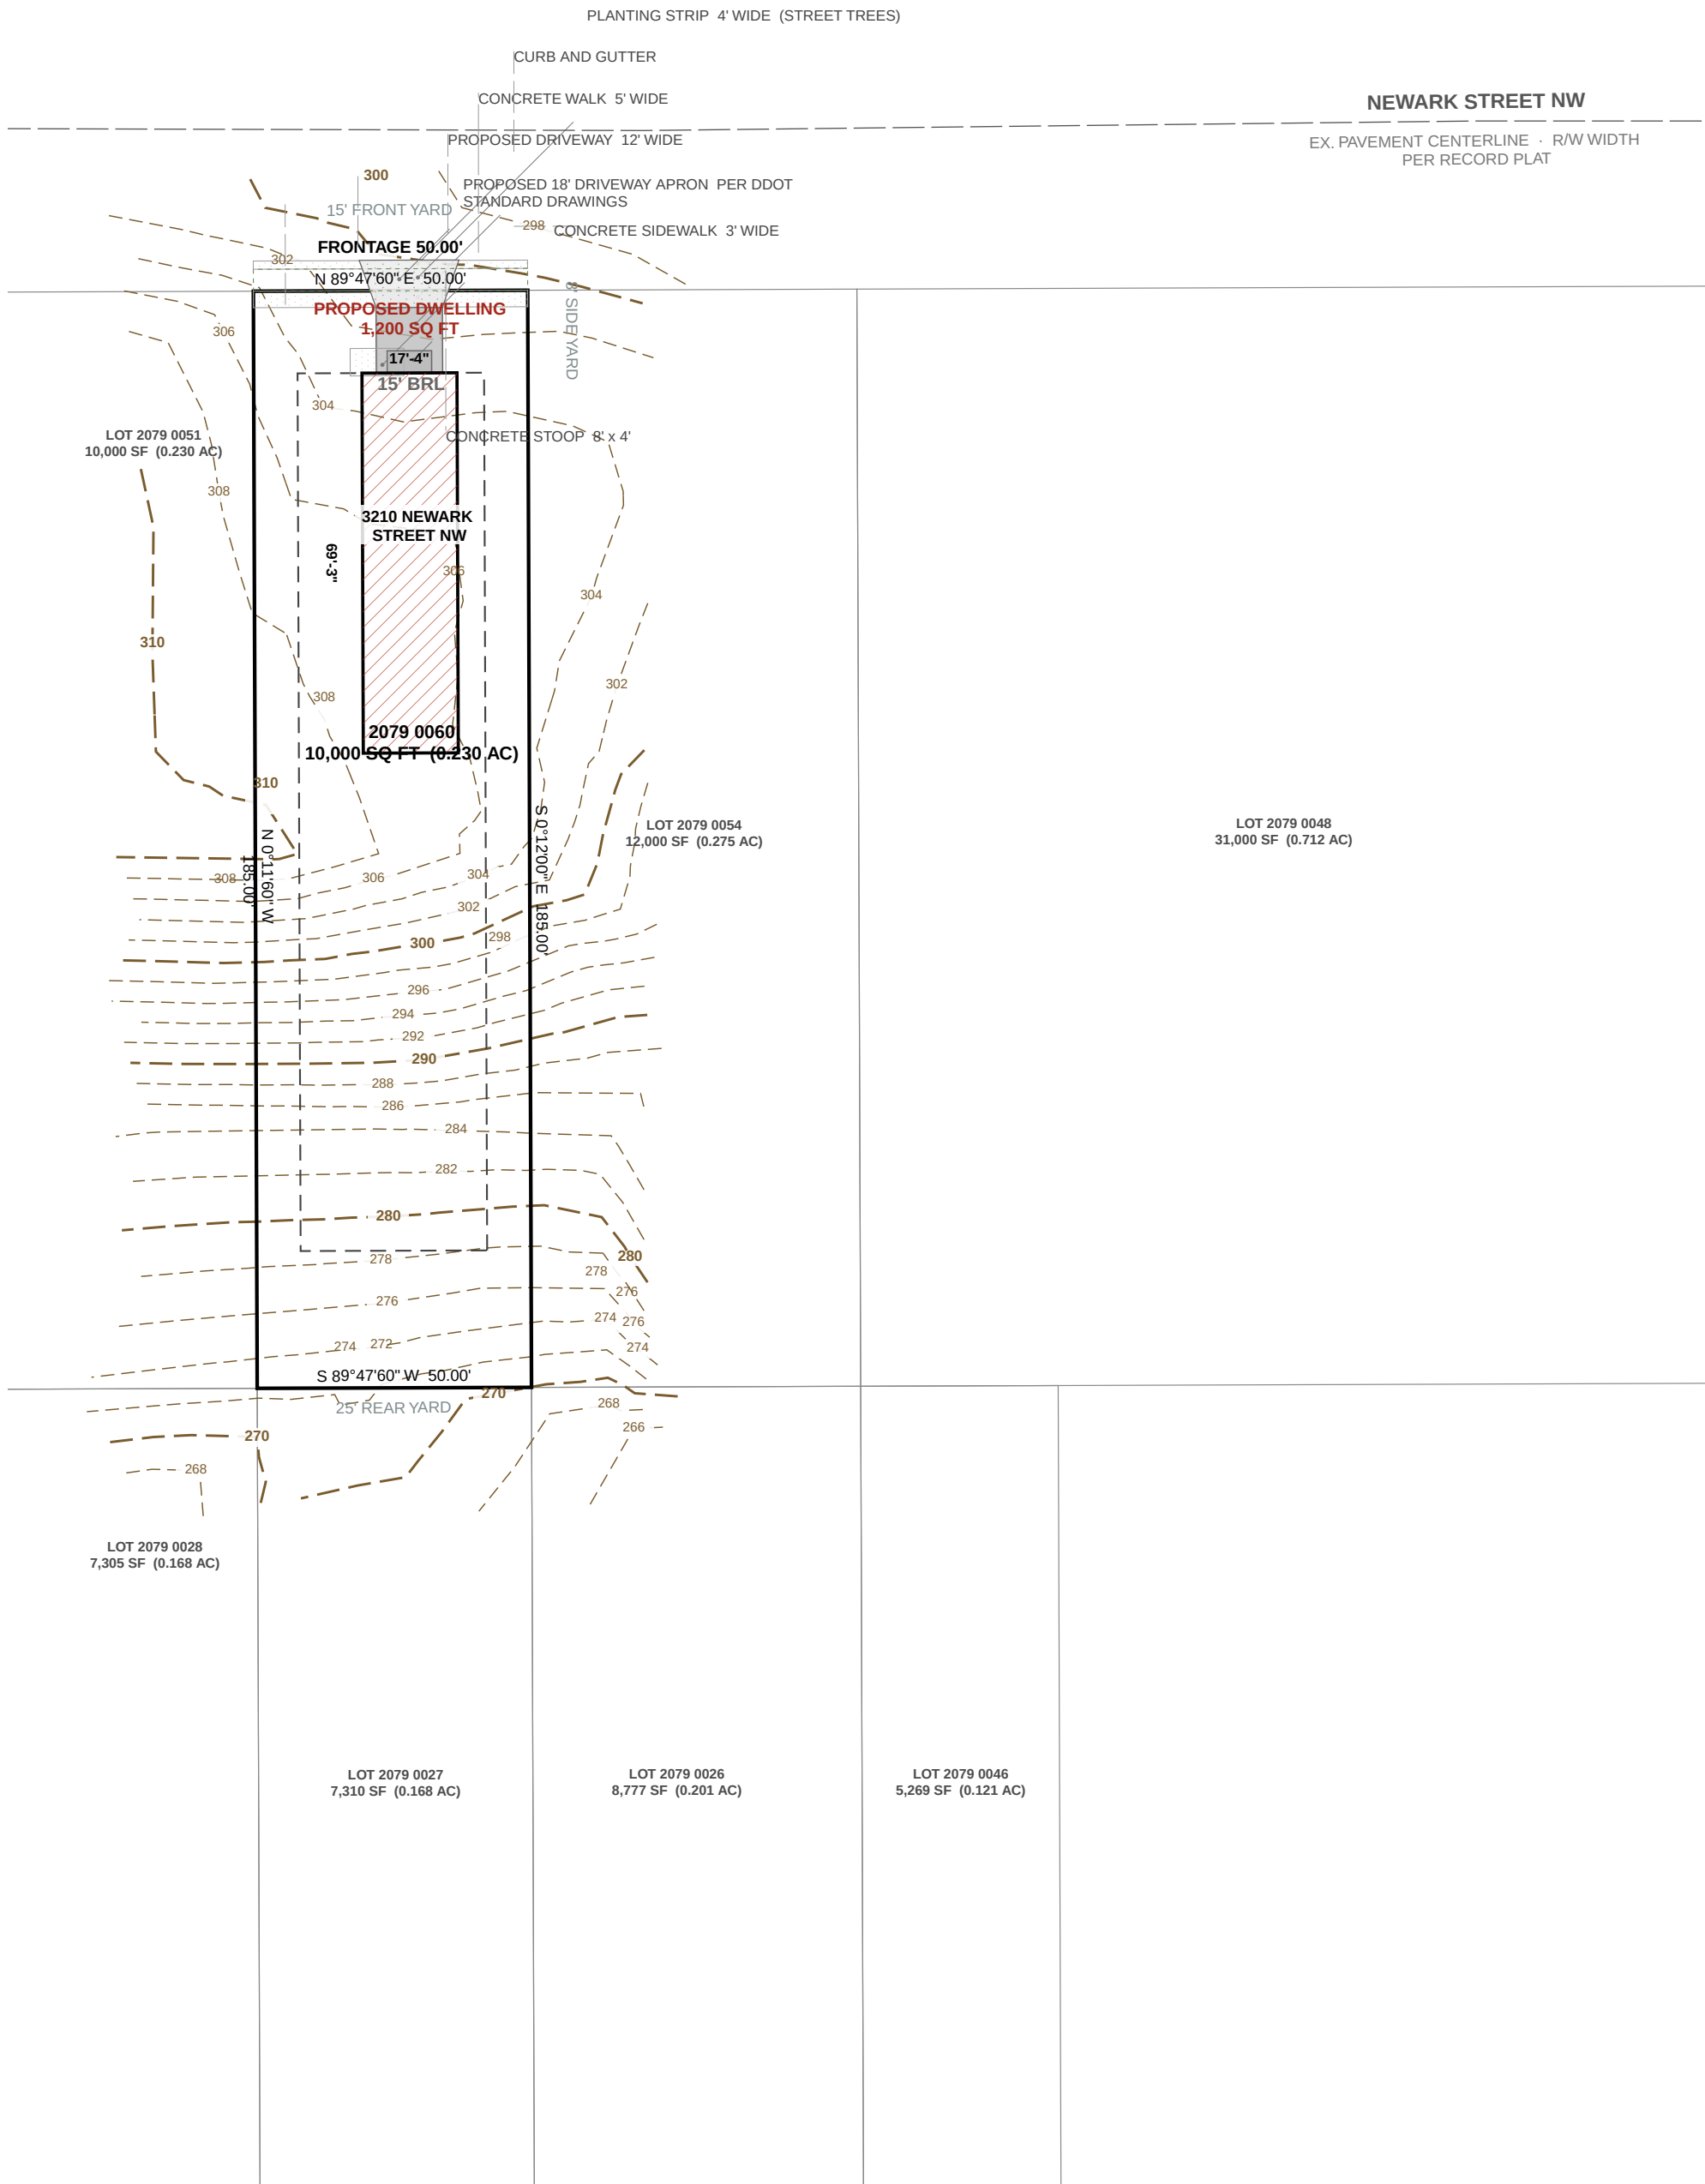



KEALEE

Design, build, deliver

PROJECT
3210 NEWARK STREET NW
ADDRESS
3210 NEWARK STREET NW
JURISDICTION
District of Columbia
ZONE
R-1B
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
3 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
District of Columbia Professional Engineer
certifies: grading_design, sediment_control, stormwater_design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE District of Columbia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-1B
TAX / PARCEL ID	2079 0060
GROSS TRACT AREA	10,000 SF 0.230 AC
LOT FRONTAGE	— 50.00'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	15' 15'
SIDE YARD	8' 8'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 12.0%
BUILDING FOOTPRINT	— 1,200 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	10,000 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	10,000 SF
6. TOTAL AREA DISTURBED	5,649 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH DOEE

BUILDING DATA

	G	B	FF	SF	HT	STY
3210 NEWARK STREET NW	—	—	—	—	20'	2

3210 NEWARK STREET NW: B: basement; FF: finished floor; SF: subfloor; HT: height; STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 14.6% impervious	10,000	0.230	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	10,000		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.05
Driveway and on-lot paving	261		0.05
Pervious — lawn	8,539		0.25
Composite C			0.352
Flow path			206 ft
Flow path slope			21.3 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.77 in/hr
Peak discharge PRE, Q = CIA			0.39 cfs
Peak discharge POST, Q = CIA			0.55 cfs
INCREASE TO BE MANAGED			0.16 cfs
Rv = 0.05 + 0.0091			0.3315
Water quality volume WQv			151 cf

Time of concentration by Kirpich over a 206 ft flow path at 21.3%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.77 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2, Ver. 3, PFDS point estimate, 38,9344 ft 77.0639 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. COEE's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01. NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE DISTRICT OF COLUMBIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —


SOILS TABLE

USDA NRCS SSURGO — survey area DC001, District of Columbia

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AsC	Ashe loam, 8 to 15 percent slopes	.32	No	B	Somewhat excessively drained
AsD	Ashe loam, 15 to 40 percent slopes	.32	No	B	Somewhat excessively drained
BdB	Beltsville silt loam, 0 to 8 percent slopes	.49	No	C	Moderately well drained
BeB	Beltsville Urban land complex, 0 to 8 percent slopes	.49	No	C	Moderately well drained
Bg	Bibb sandy loam	.28	Yes	B/D	Poorly drained
BrB	Bourne fine sandy loam, 0 to 8 percent slopes	.32	No	D	Moderately well drained
BrC	Bourne fine sandy loam, 8 to 15 percent slopes	.32	No	D	Moderately well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — District of Columbia — Office of the Surveyor / OCTO, Record Lots — DC...
Existing contours — District of Columbia — OCTO — Elevation/MapServer/3 — Topography 2 Foot Contours...

GRAPHIC SCALE — 1" = 30'





KEALEE

design, build, deliver

PROJECT
3210 NEWARK STREET NW

3210 NEWARK ST

JURIS

DISU

R-1B

SHEET
C-500 — Utility Plan

SCALE
1" = 30'

STATUS

PRELIMINARY

SHEET NO. 1000

4519

COORDINATES
E990-0010

H: NAD83

V. NAVD88

PROFESSIONAL

District of Columbia Professional Engineer
certificat: utility design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope

PLAN TYPE AND PREPARATION

PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-500 — Utility Plan
DISCIPLINE	District of Columbia Professional Engineer
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-1B	
TAX / PARCEL ID	20799 0060	
GROSS TRACT AREA	10,000 SF	0.230 AC
LOT FRONTAGE	—	50.00'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	15'	15'
SIDE YARD	8'	8'
REAR YARD	25'	25'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	40%	12.0%
BUILDING FOOTPRINT	—	1,200 SF
DATUM		
HORIZONTAL	EP5G-2248	NAD83
VERTICAL	NAVD88 (feet)	

SITE ANALYSIS

1. Gross tract area	10,000 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	10,000 SF
6. TOTAL AREA DISTURBED	5,649 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH DOEE

BUILDING DATA

	G	B	FF	SF	HT	STY
3210 NEWARK	—	—	—	—	20'	2

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 14.6% impervious	10,000	0.230	C
PRE-DEVELOPMENT	SF		
Pervious — lawn / meadow	10,000		0.250
Composite C			0.250
POST-DEVELOPMENT	SF		
Proposed roof	1,200		0.95
Driveway and on-lot paving	261		0.95
Pervious — lawn	8,539		0.25
Composite C			0.352
Flow path		256.8 ft	
Flow path slope		21.3 %	
Time of concentration (Kirpich)		5.0 min	
Rainfall intensity, 30 p		6.77 in/hr	
Peak discharge PRE, $Q = C \cdot I \cdot A$		0.39 cfs	
Peak discharge POST, $Q = C \cdot I \cdot A$		0.55 cfs	
INCREASE TO BE MANAGED		0.16 cfs	
$R_v = 0.05 - 0.0001$		0.1015	
Water quality volume WQ_v		151 cft	

SEQUENCE OF CONSTRUCTION

- 1 DAY
2 DAYS
1 DAY
2 DAYS
5 DAYS
MONTHS
10 DAYS
5 DAYS
1 DAY

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS BEFORE CONSTRUCTION TO VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE TO BE MAINTAINED AT ALL TIMES. DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. POINTS FOR EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPLETED JURISDICTION JOBS, NOT A BOUNDARY LINE.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN ALLEYWAY. THERE IS NO DRIVEWAY, NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSION CURB AT THE APRON PER DPW&T STD. 300.01, NOTE 6. ON-ALLEYWAY DRIVEWAY CULVERTS ARE NOT REQUIRED. THE DRIVEWAY DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE DISTRICT OF COLUMBIA.

SEAL	SIGNATURE _____	DATE _____
	LICENSE NO. _____	EXPIRATION DATE _____

REVISIONS

— none —

SOILS TABLE USDA NRCS SSURGO — survey area DC001, District of Columbia

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASc	Ashe land, 8 to 15 percent slopes	.32	No	B	Somewhat excessively drained
ASd	Ashe land, 15 to 40 percent slopes	.32	No	B	Somewhat excessively drained
BdB	Beltsville silt loam, 0 to 8 percent slopes	.49	No	C	Moderately well drained
BeB	Beltsville-Urban land complex, 0 to 8 percent slopes	.49	No	C	Moderately well drained
Bq	Bibb sandy loam	.28	Yes	B/D	Poorly drained
BnC	Bourne fine sandy loam, 0 to 8 percent slopes	.32	No	D	Moderately well drained
BrC	Bourne fine sandy loam, 8 to 15 percent slopes	.32	No	D	Moderately well drained

SOURCE AND ACCURACY
Parcel boundary — jurisdiction gis — District of Columbia — Office of the Surveyor / OCTO, Record Lots — DC...
Existing contours — District of Columbia — OCTO — Elevation/MapServer/3 — Topography 2 Foot Contours...

GRAPHIC SCALE — 1" = 30'





KEALEE

Design, build, deliver

PROJECT
3210 NEWARK STREET NW
ADDRESS
3210 NEWARK STREET NW
JURISDICTION
District of Columbia
ZONE
R-1B
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
5 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Qualified Environmental Professional
certifies: tree_conservation

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	L-100 — Landscape and Tree Canopy Plan
DISCIPLINE	Landscape Architect / Qualified Professional
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-1B
TAX / PARCEL ID	2079 0060
GROSS TRACT AREA	10,000 SF 0.230 AC
LOT FRONTAGE	— 50.00'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	15' 15'
SIDE YARD	8' 8'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 12.0%
BUILDING FOOTPRINT	— 1,200 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	10,000 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	10,000 SF
6. TOTAL AREA DISTURBED	5,649 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH DOE

BUILDING DATA

	G	B	FF	SF	HT	STY
3210 NEWARK	—	—	—	—	20'	2
STREET NW	B: basement FF: finished floor SF: subfloor HT: height STY: storeys					

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 14.6% impervious	10,000	0.230	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	10,000		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-lot paving	261		0.95
Pervious — lawn	8,539		0.25
Composite C			0.352
Flow path			206 ft
Flow path slope			21.3 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.77 in/hr
Peak discharge PRE, Q = CIA			0.39 cfs
Peak discharge POST, Q = CIA			0.55 cfs
INCREASE TO BE MANAGED			0.16 cfs
Rv = 0.05 + 0.0091			0.3315
Water quality volume Wqv			151 cf

Time of concentration by Kirpich over a 206 ft flow path at 21.3%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.77 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2, Ver. 3, PFDS point estimate, 38,5344 ft 77.0639 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. DOE's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01. NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE DISTRICT OF COLUMBIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NOTE —

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — District of Columbia — Office of the Surveyor / OCTO, Record Lots — DC...
Existing contours — OCTO — Elevation/MapServer/3 — Topography 2 Foot Contours...

GRAPHIC SCALE — 1" = 30'

0 30 60 90 120 FEET