



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
1 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY KEALEE SITE-PLAN ENGINEER
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- 1 C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	165.902 SF
GROSS TRACT AREA	3.809 AC
LOT 1 AREA	19.999 SF
LOT 2 AREA	20.015 SF
LOT 3 AREA	20.051 SF
LOT 4 AREA	20.021 SF
LOT 5 AREA	20.235 SF
LOT 6 AREA	29.536 SF
NET LOT AREA	129.857 SF
LOT 1 FRONTAGE	70' MIN
LOT 2 FRONTAGE	70' MIN
LOT 3 FRONTAGE	70' MIN
LOT 4 FRONTAGE	70' MIN
LOT 5 FRONTAGE	70' MIN
LOT 6 FRONTAGE	70' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area 165,902 SF
2. Area of dwelling 13,629 SF
3. Wooded area NOT ESTABLISHED
4. Floodplain area NOT ESTABLISHED
5. Net lot area 129,857 SF
6. TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.87	197.60	206.60	205.60	20'	2
LOT 6	206.90	197.23	206.23	205.23	20'	2

G garage slab · B basement · FF finished floor · SF subfloor · HT height · STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.6%	0.77	1.13	0.36	332
LOT 3	20,061	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,066

Peak flows are summed for catchments; Q in cfs. WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PG&C CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 83 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 2205601 — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY, NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LEADER CONTOUR MAPPING.
6. CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
7. DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.


SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

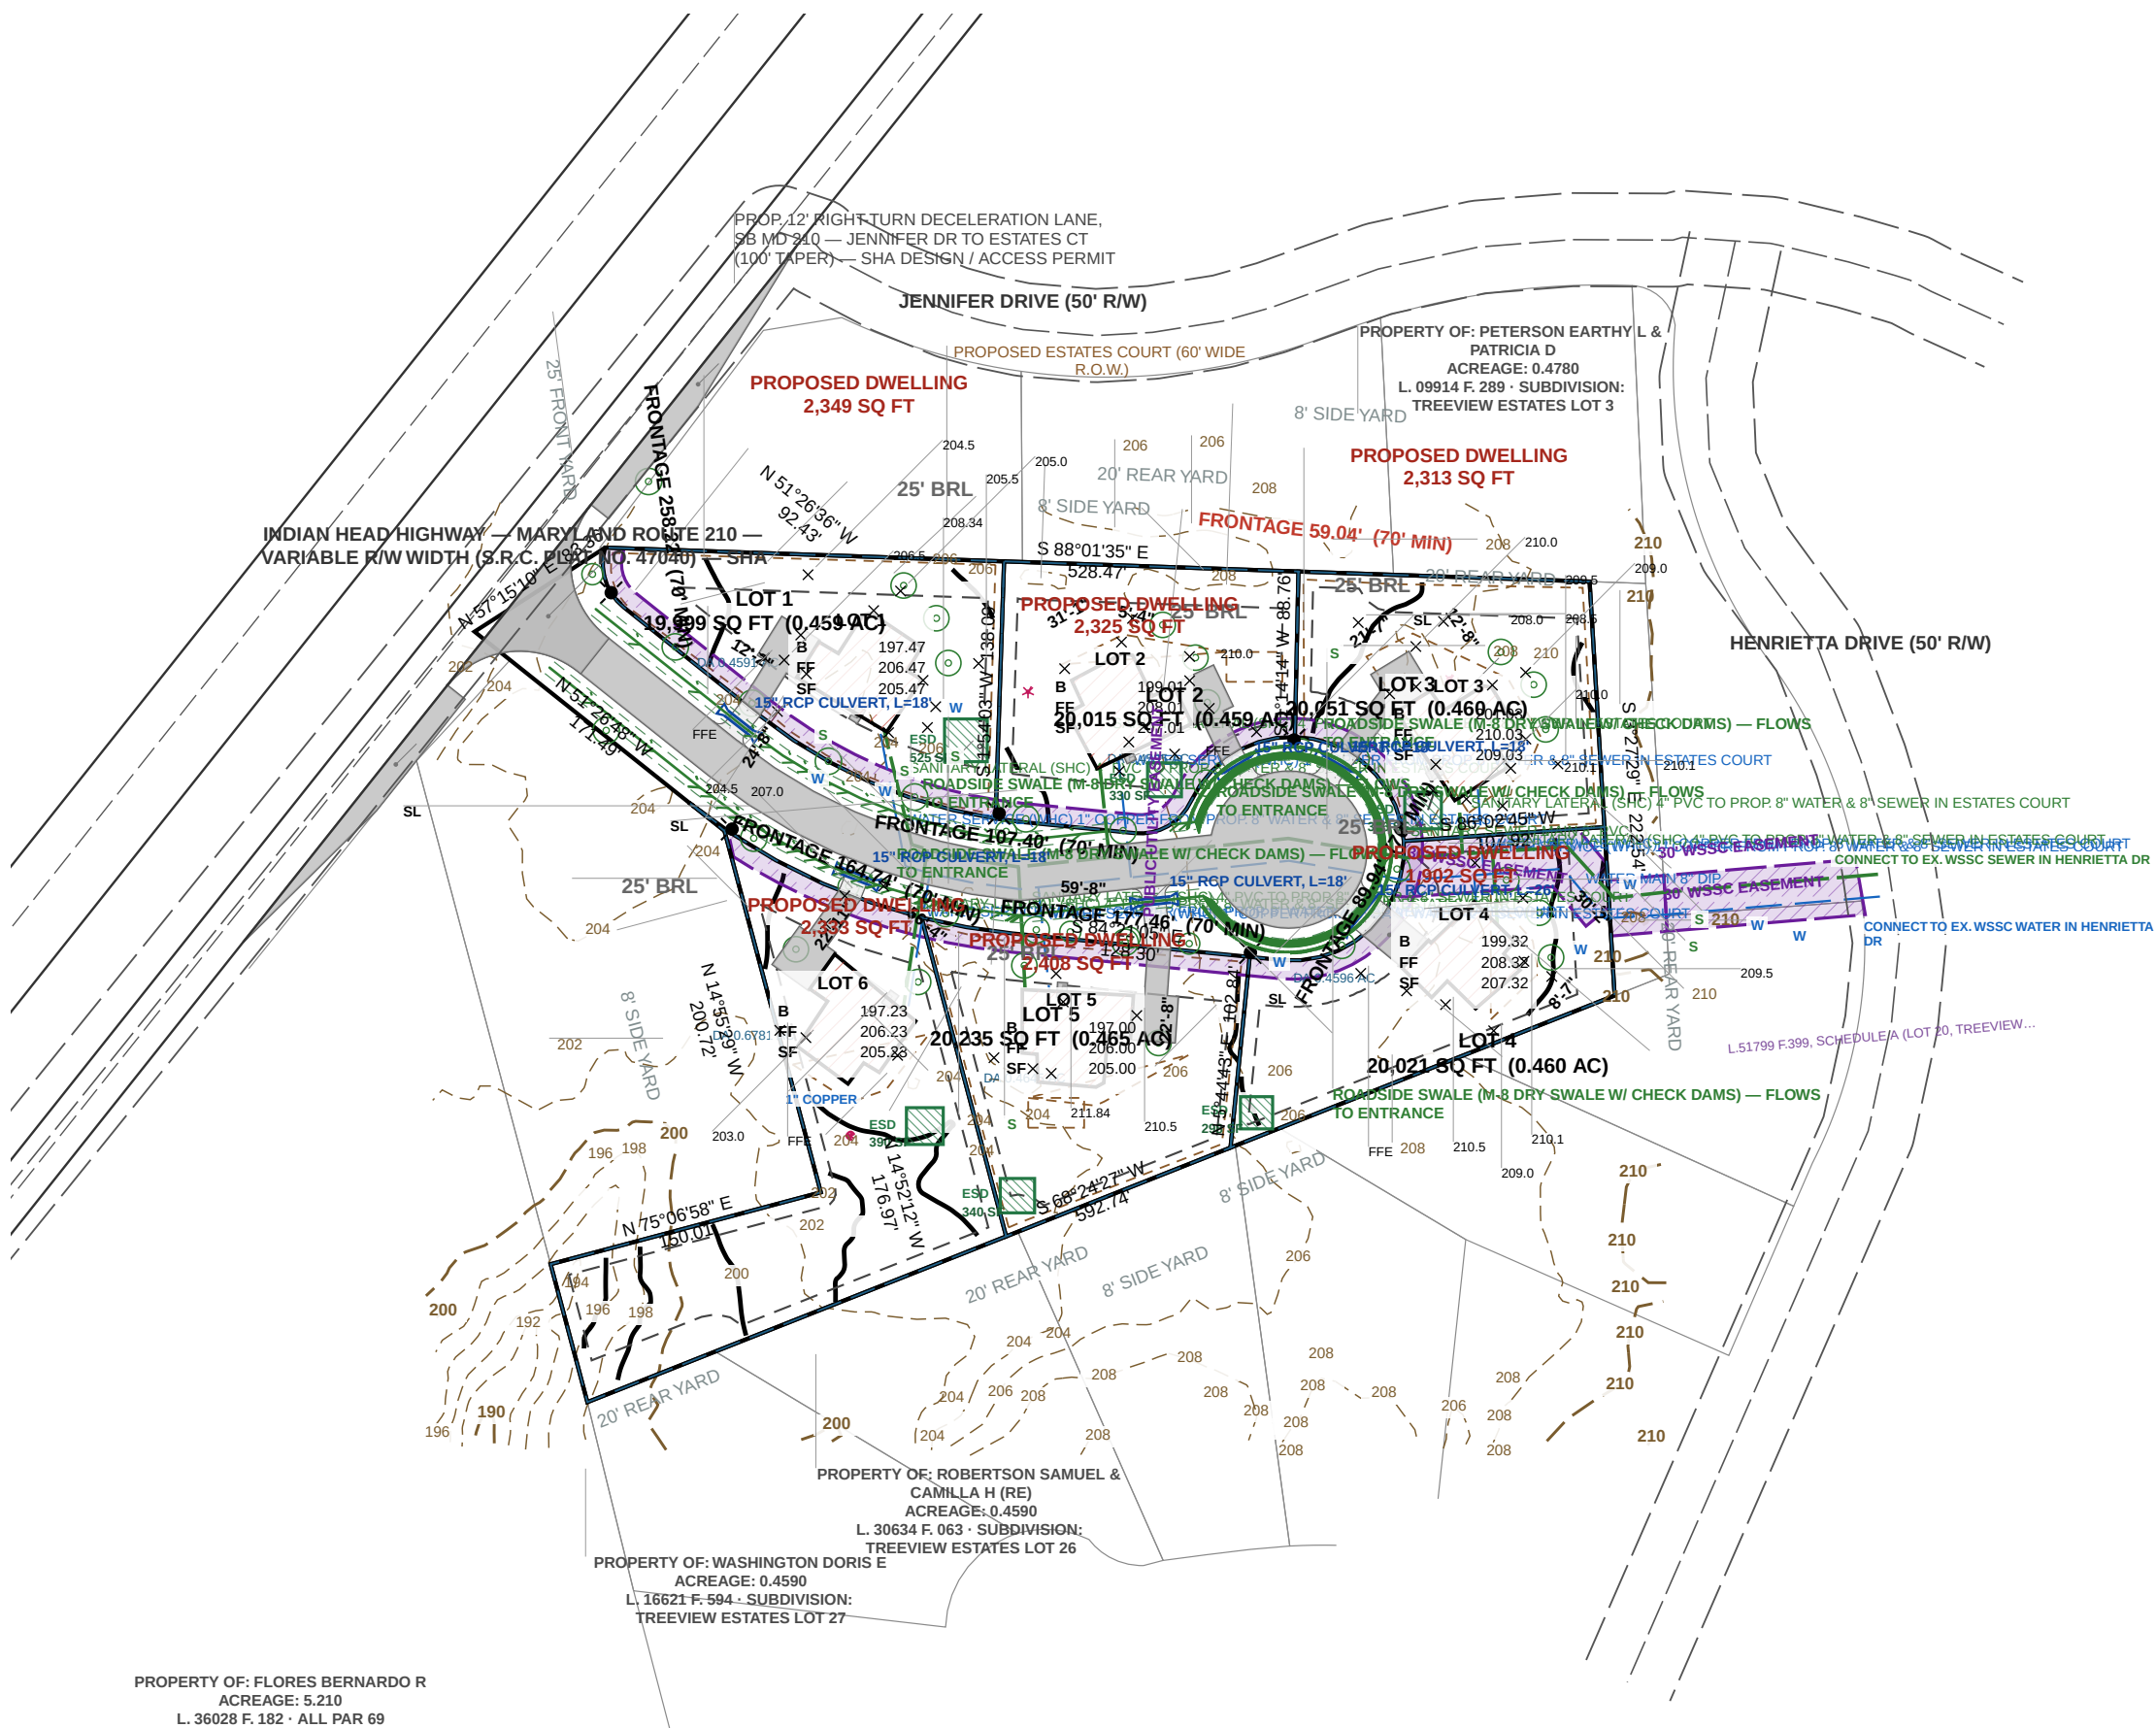


SOILS TABLE — USDA NRCS SSURGO — PG&C Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasolo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PG&C DPW&T STD. 600.02

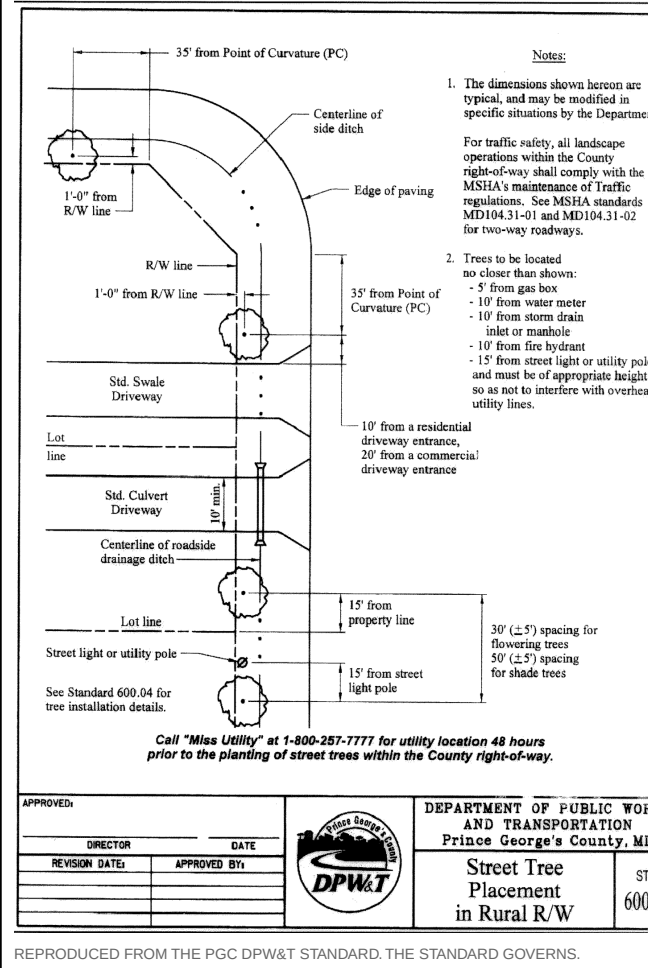

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PG&C DPW&T STD. 600.10

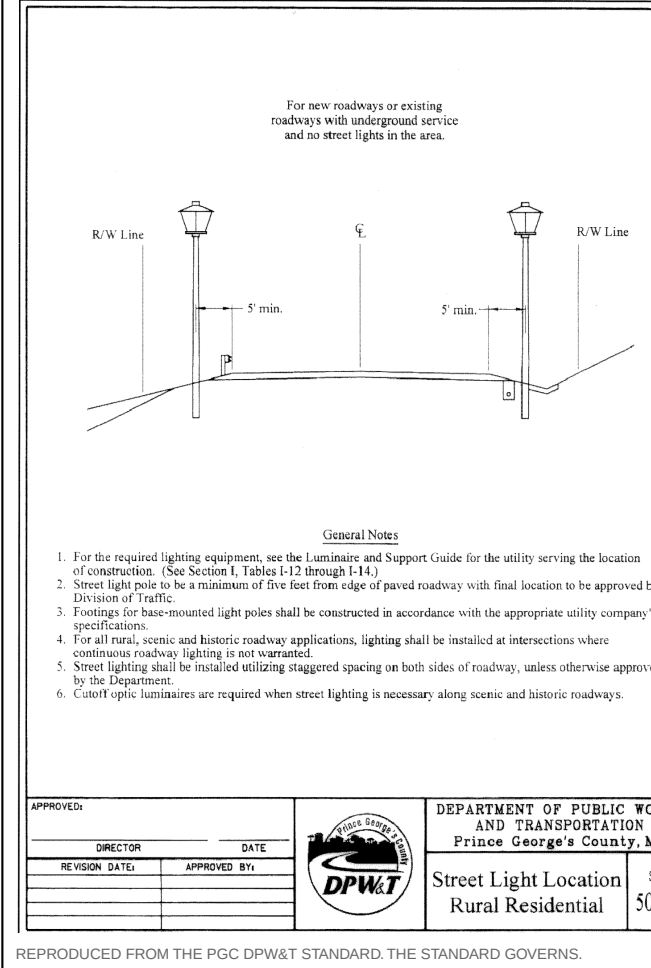

STREET TREE INSTALLATION IN RURAL RW — PG&C DPW&T STD. 600.04

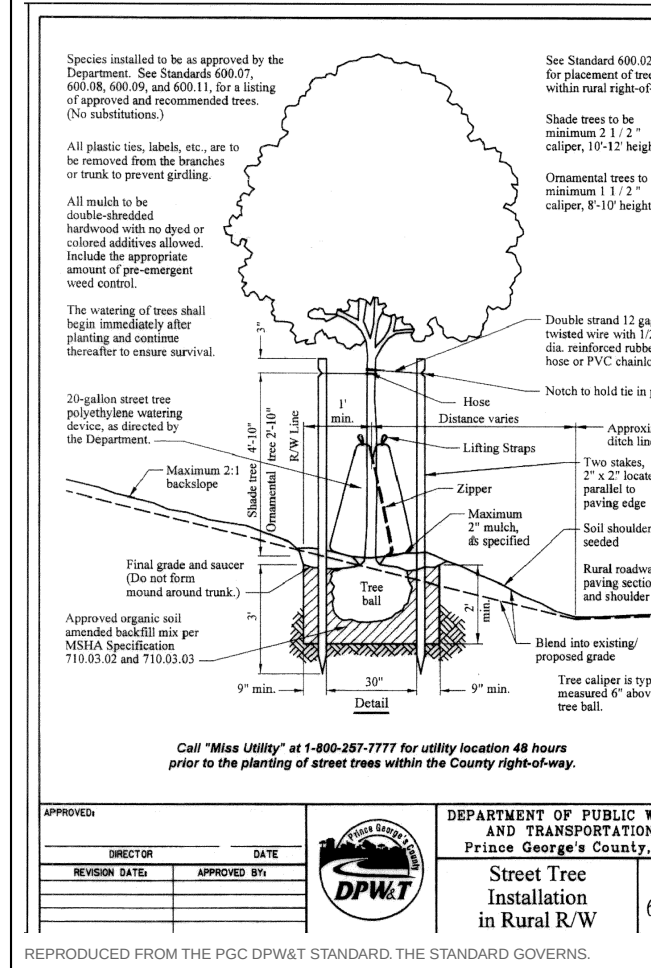



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
2 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- 1 C-011 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	165,902 SF
GROSS TRACT AREA	165,902 SF
LOT 1 AREA	19,999 SF
LOT 2 AREA	20,015 SF
LOT 3 AREA	20,051 SF
LOT 4 AREA	20,021 SF
LOT 5 AREA	20,235 SF
LOT 6 AREA	29,536 SF
NET LOT AREA	129,857 SF
LOT 1 FRONTAGE	70' MIN
LOT 2 FRONTAGE	70' MIN
LOT 3 FRONTAGE	70' MIN
LOT 4 FRONTAGE	70' MIN
LOT 5 FRONTAGE	70' MIN
LOT 6 FRONTAGE	70' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area 165,902 SF
2. Area of dwelling 13,629 SF
3. Wooded area NOT ESTABLISHED
4. Floodplain area NOT ESTABLISHED
5. Net lot area 129,857 SF
6. TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-17(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.88	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.87	197.80	206.80	205.80	20'	2
LOT 6	206.90	197.23	206.23	205.23	20'	2

G: garage slab · B: basement · FF: finished floor · SF: subfloor · HT: height · STY: storeys · A DASH IS NOT ZERO: no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.6%	0.77	1.13	0.36	332
LOT 3	20,061	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.90	7.11	2.11	2,066

Peak flows are summed for catchments; Q in cfs. WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PG&C CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 83 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220501 — TRANScribed AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY, NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LEAD CONTOUR MAPPING.
6. CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
7. DRIVEWAY CULVERTS ARE REQUIRED THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
SEAL	LICENSE NO.
REVISIONS	EXPIRATION DATE
— NONE —	

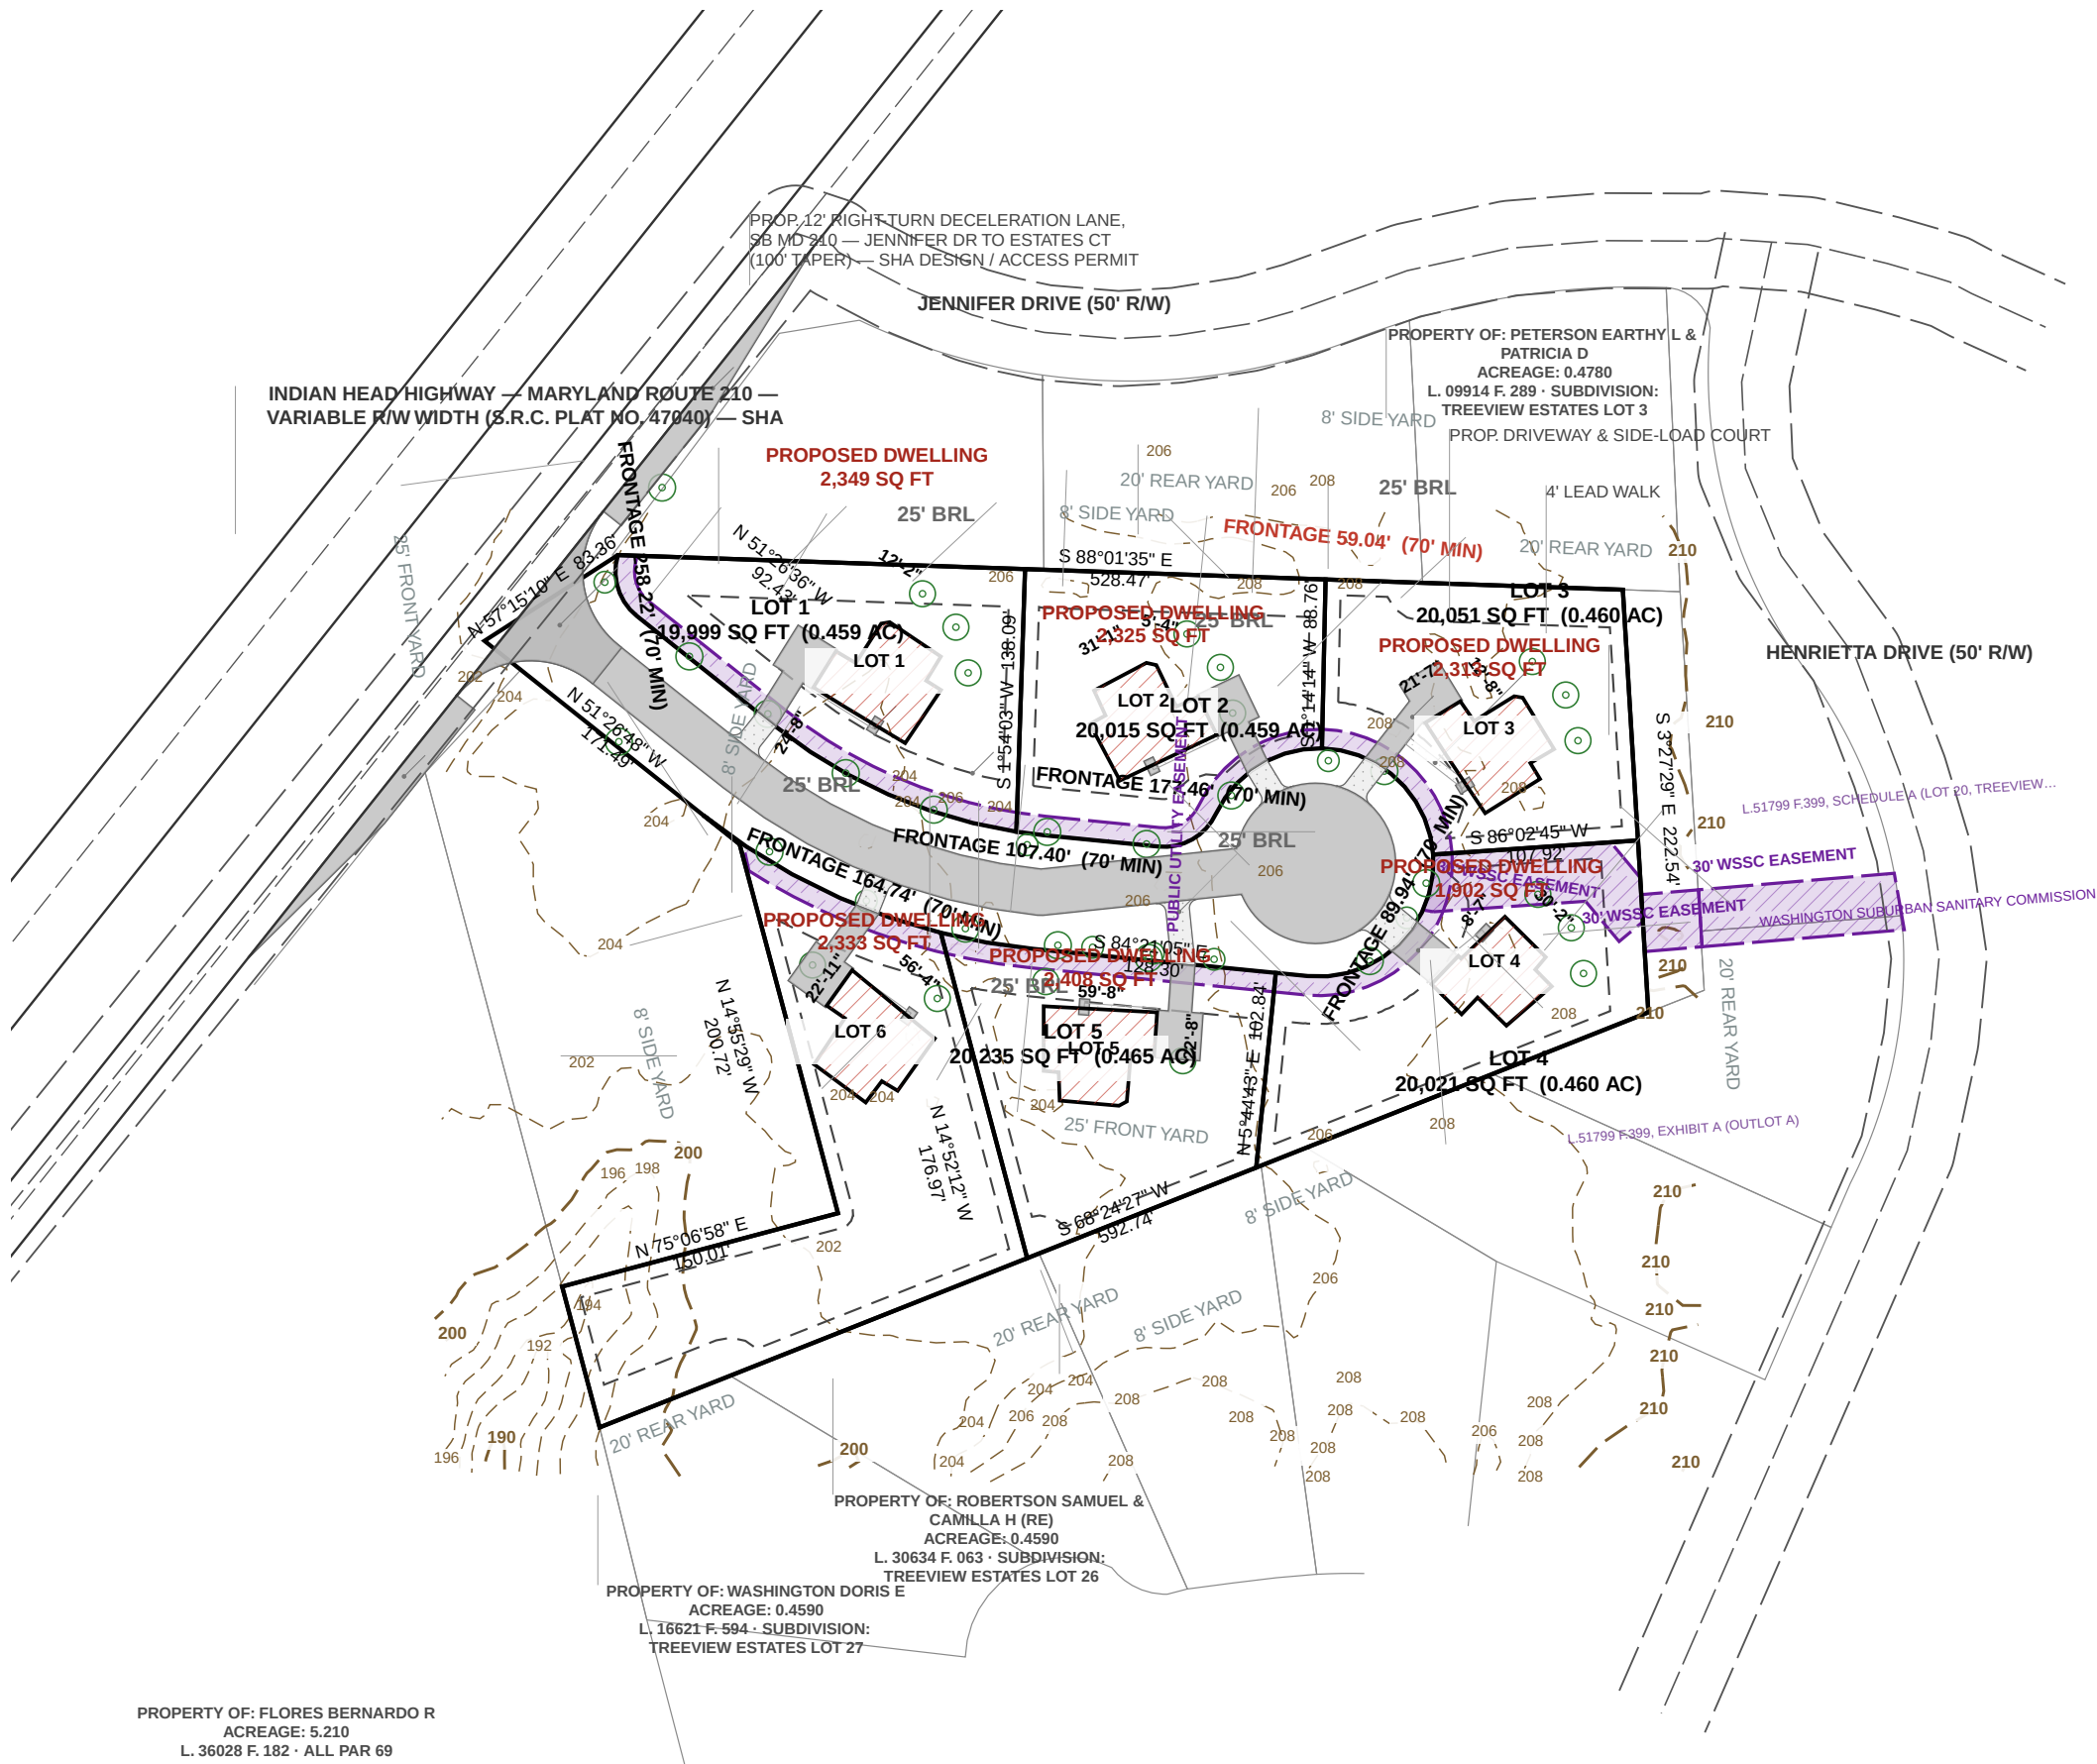

TREE CANOPY SCHEDULE


Sec. 25-128 Table 1 as amended by CB-021-2024 — 20% of NET tract area on RSP-95, met within 8'. Per lot planting per Landscape Manual Sec. 4.1(i)(1). Street trees in the right-of-way count toward canopy under Sec. 25-129.

LOT	NET AREA SF	CANOPY REQ 20% SF	SHADE PROV / REQ	ORN-EVGN PROV / REQ	STREET TREES	10-YR CANOPY PROVIDED
LOT 1	19,999	4,000	3 / 3	0 / 2 SHORT	1	NOT ESTABLISHED
LOT 2	20,015	4,003	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 3	20,051	4,010	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 4	20,021	4,004	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 5	20,235	4,047	2 / 4 SHORT	0 / 3 SHORT	3	NOT ESTABLISHED
LOT 6	29,536	5,907	2 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
TOTAL	129,857	25,971	16 / 23	0 / 17	24	


TEN-YEAR CANOPY IS CREDITED PER SPECIES FROM THE PRINCE GEORGE'S COUNTY LANDSCAPE MANUAL. NO SPECIES HAS BEEN SELECTED ON THIS SET, SO THE CANOPY PROVIDED IS NOT ESTABLISHED AND THE SCHEDULE IS NOT YET BALANCED. EXISTING TREES PRESERVED ALSO COUNT.

NO TREE IS PLANTED WITHIN A STORM DRAIN EASEMENT. THE 60 FT 5455 EASEMENT CARRIES THE 42 IN RCP MAN AND THE 10 FT REAR EASEMENT CARRIES THE DRAINAGE SWALE. BOTH ARE SHOWN ON THIS SHEET AND BOTH ARE EXCLUDED FROM PLANTABLE AREA.
A VARIANCE OF THE CANOPY REQUIREMENT IS AVAILABLE UNDER SEC. 25-129.
PER LOT PLANTING IS SHORT ON EVERY LOT AS DRAWN. LANDSCAPE MANUAL, SEC. 4.1(i)(3) REQUIRES 4 MAJOR SHADE AND 3 ORNAMENTAL OR EVERGREEN TREES ON A LOT OF 20,000 SF OR MORE, AND 3 AND 2 ON A LOT OF 8,500 TO 19,999 SF. NO ORNAMENTAL OR EVERGREEN TREES ARE DRAWN. AT LEAST ONE SHADE TREE MUST STAND ON THE SOUTH OR WEST SIDE WITHIN 30 FT OF THE DWELLING, AND AT LEAST ONE REQUIRED TREE IN THE FRONT YARD. SPECIES AND FINAL LOCATIONS BY THE LANDSCAPE ARCHITECT.
THE CANOPY REQUIREMENT MUST BE MET ON-SITE UNLESS A VARIANCE IS APPROVED, AND WHERE A GRADING PERMIT IS THE ONLY APPLICATION THE CANOPY NOTES BELONG ON THE GRADING PLAN — ENVIRONMENTAL TECHNICAL MANUAL PART D, SEC. 3.5.



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

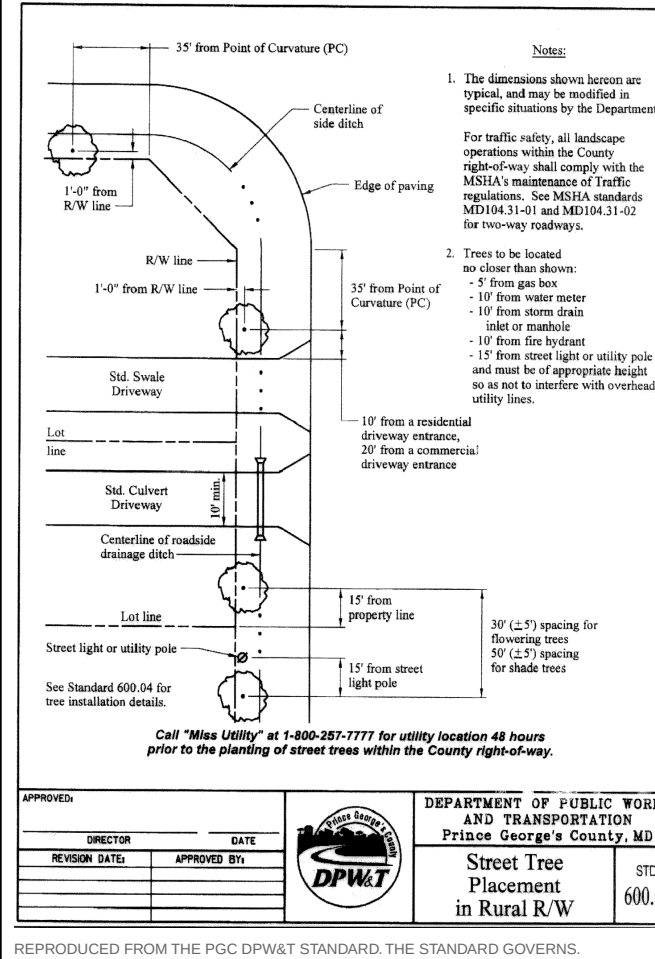

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

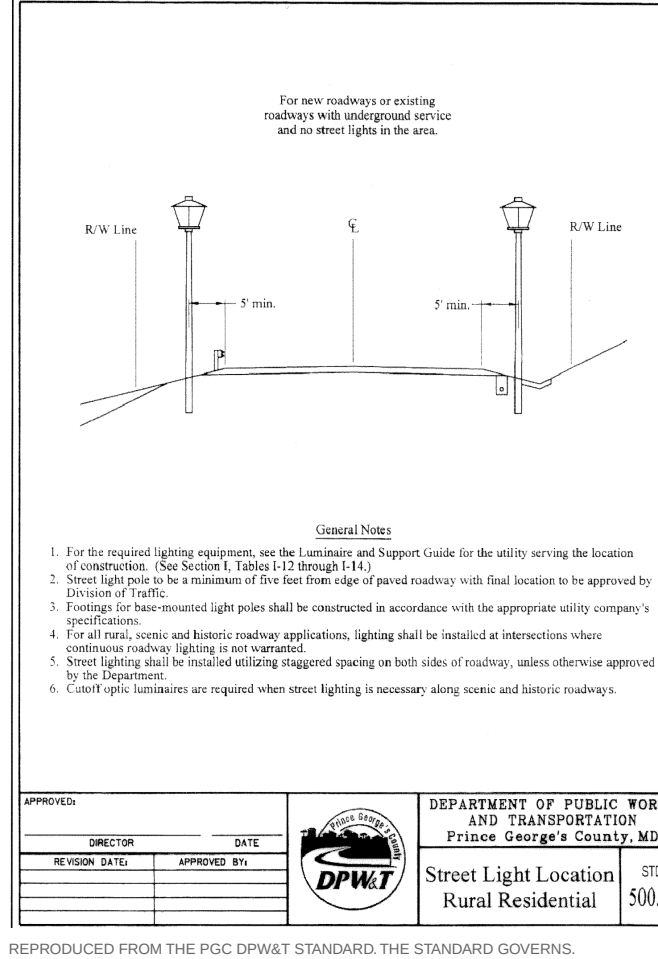

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

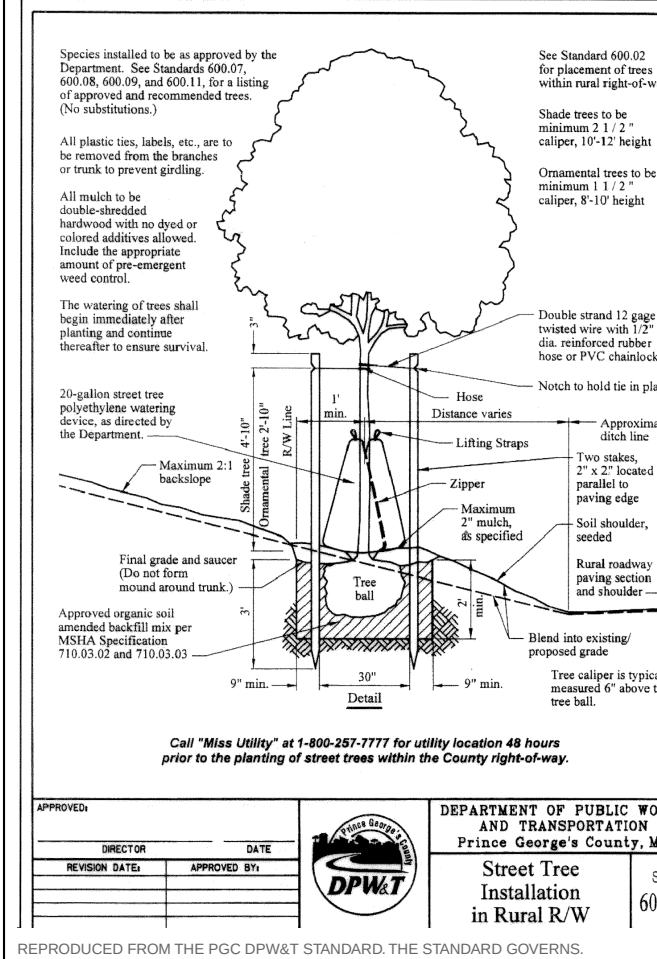



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
3 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO. DATE DESCRIPTION

INDEX OF DRAWINGS

- 1 C-011 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	165.902 SF
GROSS TRACT AREA	3.809 AC
LOT 1 AREA	19,999 SF
LOT 2 AREA	20,015 SF
LOT 3 AREA	20,051 SF
LOT 4 AREA	20,021 SF
LOT 5 AREA	20,235 SF
LOT 6 AREA	29,536 SF
NET LOT AREA	129,857 SF
LOT 1 FRONTAGE	70' MIN
LOT 2 FRONTAGE	70' MIN
LOT 3 FRONTAGE	70' MIN
LOT 4 FRONTAGE	70' MIN
LOT 5 FRONTAGE	70' MIN
LOT 6 FRONTAGE	70' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area 165,902 SF
2. Area of dwelling 13,629 SF
3. Wooded area NOT ESTABLISHED
4. Floodplain area 129,857 SF
5. Net lot area 129,857 SF
6. TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.87	197.60	206.60	205.60	20'	2
LOT 6	206.90	197.23	206.23	205.23	20'	2

G garage slab · B basement · FF finished floor · SF subfloor · HT height · STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.6%	0.77	1.13	0.36	332
LOT 3	20,061	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,066

Peak flows are summed for catchments; Q in cfs. WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES


1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PG&C CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 83 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 2205601 — TRANScribed AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY, NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LEAD CONTOUR MAPPING.
6. CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
7. DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


IF REQUIRED NOTE(S) DO NOT FIT THIS SHEET: GRADING CERTIFICATE; STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE. THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

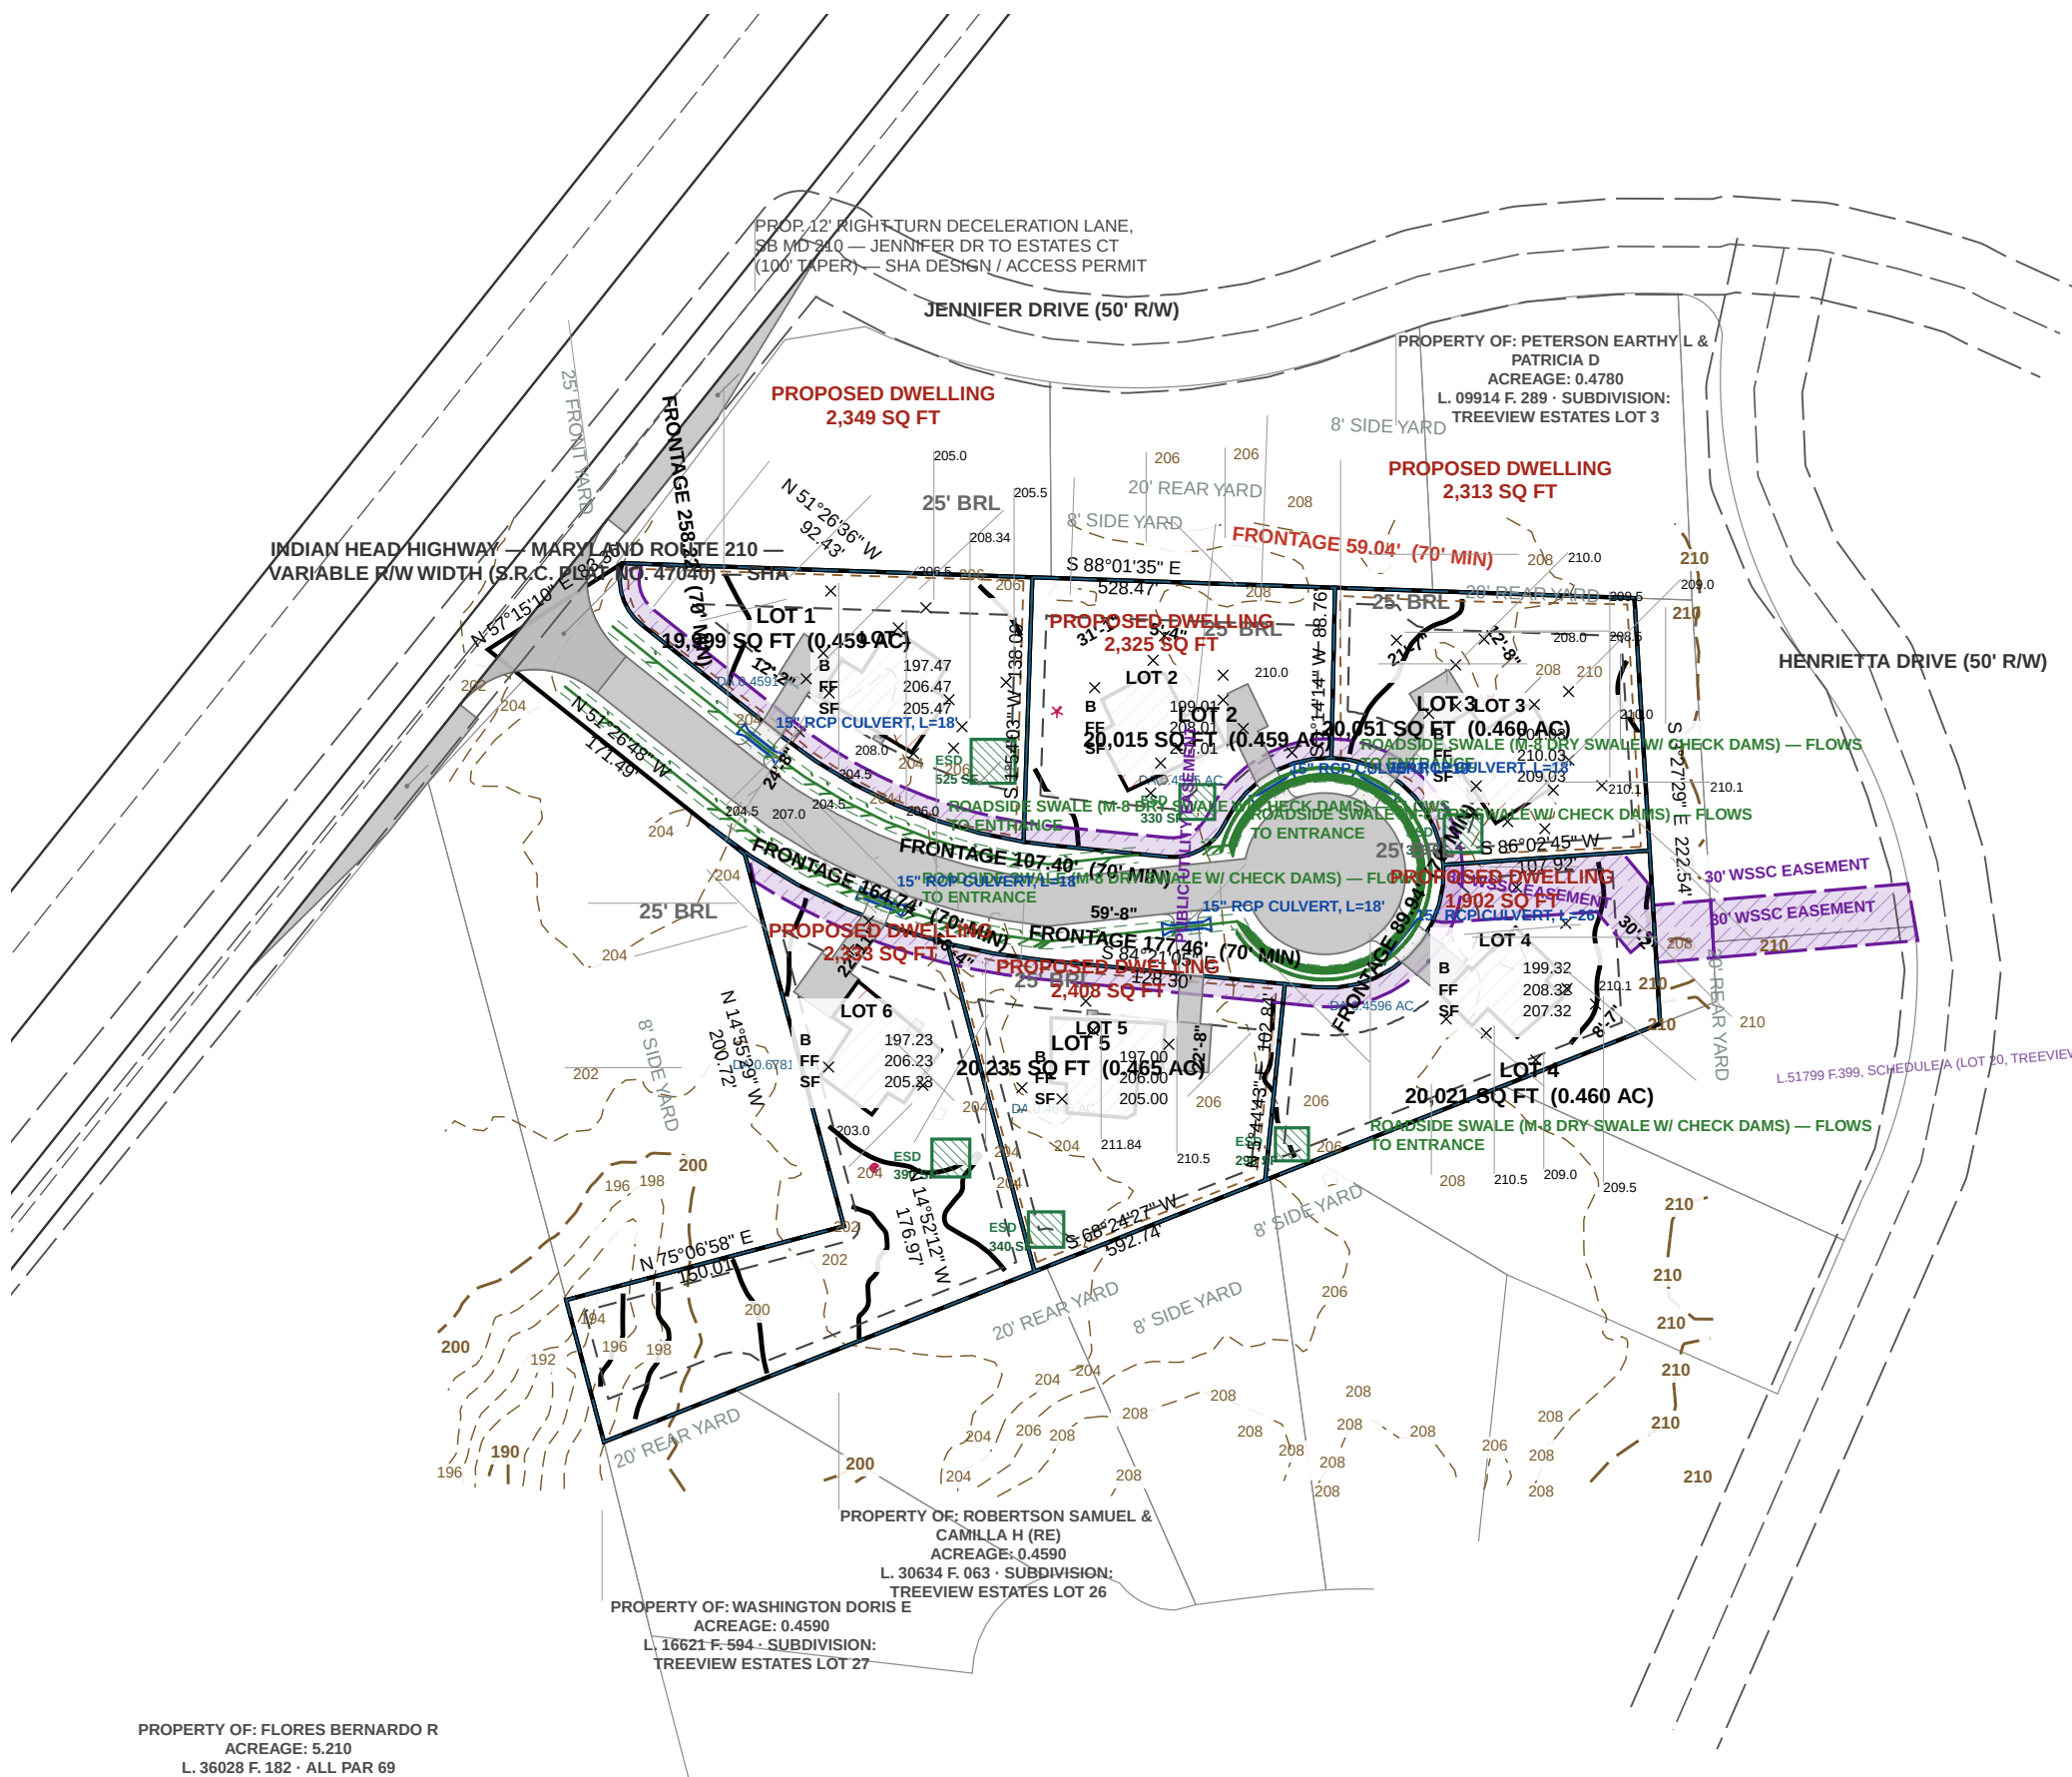

SOILS TABLE — USDA NRCS SSURGO — PG&C Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PG&C DPW&T STD. 600.02

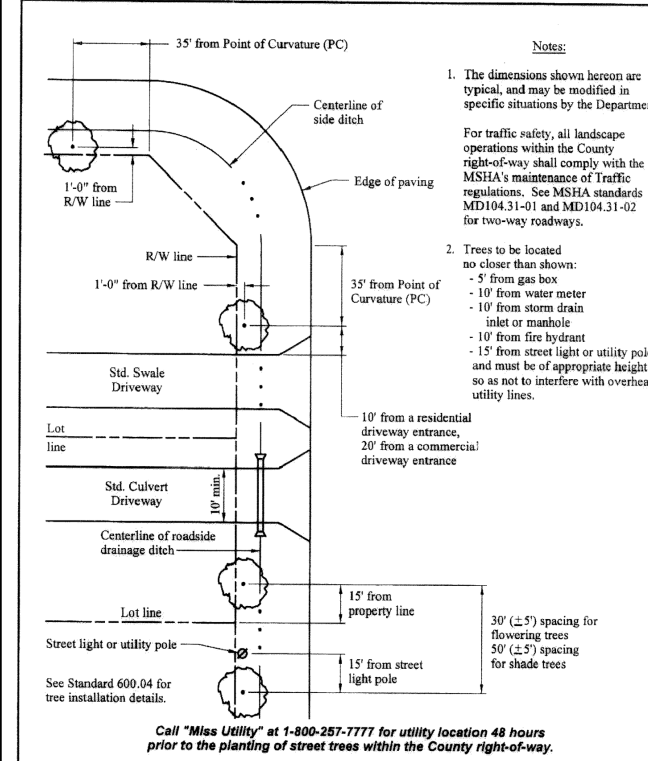

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DIRECTOR	SIGNATURE	STREET TREE PLACEMENT IN RURAL R/W
REVIEW DATE	APPROVED BY	600.02




STREET LIGHT LOCATION — RURAL RESIDENTIAL — PG&C DPW&T STD. 600.10

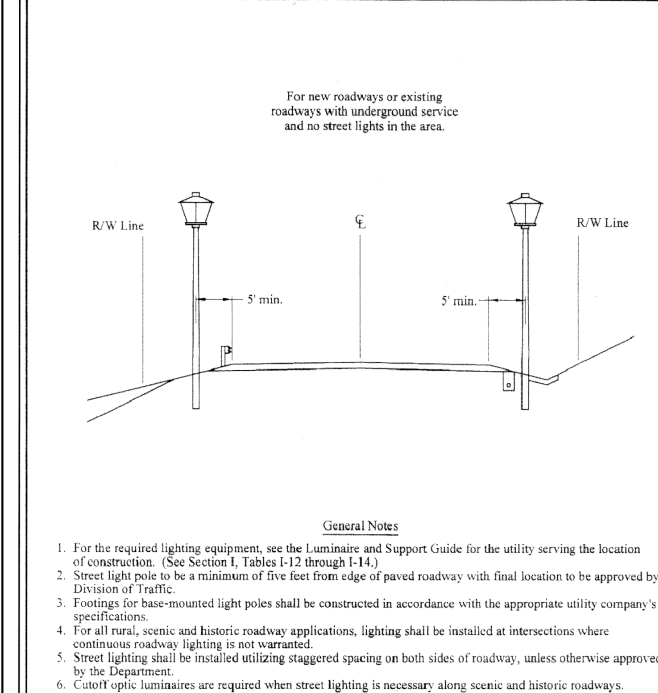

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DIRECTOR	SIGNATURE	STREET LIGHT LOCATION IN RURAL R/W
REVIEW DATE	APPROVED BY	600.10

REPRODUCED FROM THE PG&C DPW&T STANDARD, THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PG&C DPW&T STD. 600.04

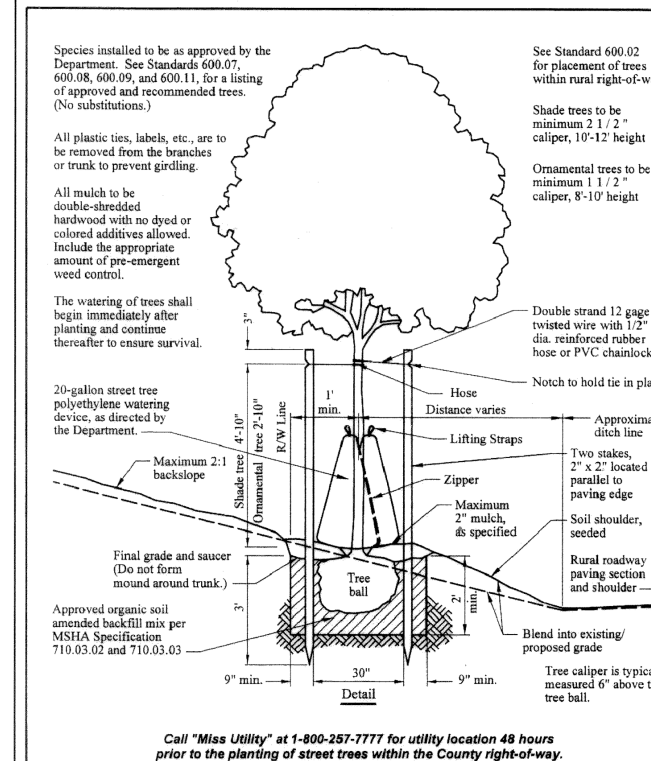

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DIRECTOR	SIGNATURE	STREET TREE INSTALLATION IN RURAL R/W
REVIEW DATE	APPROVED BY	600.04

REPRODUCED FROM THE PG&C DPW&T STANDARD, THE STANDARD GOVERNS.