

KEALEE

Design, build, deliver

PROJECT
Indian Queen East — LOT 53 & LOT 54 & LOT 55 & LOT 56
ADDRESS
9588 Fort Foote Rd · 9584 Fort Foote Rd · 9580 Fort Foote Rd · 9576 Fort Foote Rd
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-95
SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
1 OF 3
COORDINATES
EPSG 2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY KEALEE SITE-PLAN ENGINEER
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- 1 C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

ZONE	RSF-95
TAX / PARCEL ID	—
GROSS TRACT AREA	75,178 SF
LOT 53 AREA	12,389 SF
LOT 54 AREA	23,371 SF
LOT 55 AREA	25,733 SF
LOT 56 AREA	13,690 SF
NET LOT AREA	75,184 SF
LOT 53 FRONTAGE	50' MIN
LOT 54 FRONTAGE	50' MIN
LOT 55 FRONTAGE	50' MIN
LOT 56 FRONTAGE	50' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	30' 30'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 6.4%
BUILDING FOOTPRINT	— 4,784 SF
DATUM	
HORIZONTAL	EPSG 2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area 75,178 SF
2. Area of dwelling 4,784 SF
3. Wooded area NOT ESTABLISHED
4. Floodplain area NOT ESTABLISHED
5. Net lot area 75,184 SF
6. TOTAL AREA DISTURBED 41,662 SF (AT LEAST)
7. SWM REQUIRED — Sec 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
9588 Fort Foote Rd	58.91	—	59.24	58.24	20'	2
9584 Fort Foote Rd	57.24	—	57.57	56.57	20'	2
9580 Fort Foote Rd	57.27	—	57.80	56.60	20'	2
9576 Fort Foote Rd	60.69	—	61.02	60.02	20'	2

G: grade; B: basement; FF: finished floor; SF: surface; HT: height; STY: stories; A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PPE Q	POST Q	INCREASE	WQv CF
LOT 53	12,389	15.1%	0.49	0.69	0.20	192
LOT 54	23,371	9.4%	0.92	1.16	0.24	263
LOT 55	25,733	8.2%	1.01	1.24	0.23	266
LOT 56	13,690	14.2%	0.54	0.75	0.21	203
PROJECT TOTAL	75,184	10.8%	2.96	3.84	0.88	924

Peak flows are summed for catchments; Q in cfs; WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting 1 DAY
2. Obtain necessary permits 2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
4. Install stabilized construction entrance and perimeter sediment control 2 DAYS
5. Rough grade the lot 5 DAYS
6. Construct dwelling 6 MONTHS
7. Install water, sewer and storm services and the driveway 10 DAYS
8. Fine grade and stabilize all disturbed areas 5 DAYS
9. Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — INDIAN QUEEN EAST — BLOCK "E" AND PARTS OF BLOCKS D & F PLAT BOOK WWW 65, P. 60 (MSA, S1289, S1253), 12TH ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND TAX MAP 113, BLOCK F, GRID E4, PLAT DATED 6 JUNE 1987, APPROVED 28 JUNE 1987 BY THE MARYLAND NATIONAL CAPITAL PARK & PLANNING COMMISSION, PRINCE GEORGE'S COUNTY PLANNING BOARD MAP/CPC RECORD FILE S137863. SCALE 1" = 100'. SURVEYOR W. L. MEEKINS, REGISTERED LAND SURVEYOR NO. 384. TOTAL SUBDIVISION AREA 20,981.1 ACRES. PLAT LEGEND FOR PUBLIC SEWER & WATER SYSTEMS ONLY — TRANSFERRED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY; NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
6. CONNECT TO EXISTING PAVEMENT, CURBS AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01. NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

REVISIONS

— NONE —

LOT 212710
925,529 SF (0.347 AC)

LOT 212977
42,893 SF (0.985 AC)

LOT 213008
12,378 SF (0.284 AC)

LOT 213010
12,124 SF (0.278 AC)

LOT 213093
13,704 SF (0.315 AC)

LOT 213092
10,671 SF (0.245 AC)

LOT 213091
9,892 SF (0.227 AC)

SOILS TABLE

USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

DRAINAGE SWALE SCHEDULE

Rational method, NOAA Atlas 14 · NWQ: 0.02101, 0.041, 2' bottom, 3:1 sides

REACH	LENGTH	GRADE	D.A. (AC)	Q10 (CFS)	Q100 (CFS)	DEPTH	V100 (FPS)	INV IN	INV OUT	CUT
ST-1 — ST-2	110'	3.01%	0.2844	0.59	0.78	0.18'	1.73	50.20	46.90	1.0'
ST-4 — ST-3	157'	4.98%	0.3143	0.65	0.86	0.16'	2.12	60.30	52.50	1.0'
ST-3 — ST-2	177'	3.17%	0.9051	1.87	2.47	0.33'	2.51	52.50	46.90	1.0'

GRADE CONTROL SCHEDULE


POINT	LOT	DESCRIPTION	GROUND	SWALE INV
ST-1	LOT 53	Swale grade break / invert control	51.20	50.20
ST-2	LOT 54	Swale grade break / invert control	47.90	46.90
ST-3	LOT 55	Swale grade break / invert control	53.50	52.50
ST-4	LOT 56	Swale grade break / invert control	61.30	60.30
OUT	—	Swale grade break / invert control	48.90	—

SYSTEM AT THE LOW POINT: 1.7280 AC, Q10 3.57 CFS, Q100 4.71 CFS.


MAX VELOCITY 2.61 FPS AT Q100 — WITHIN THE 5 FPS PERMISSIBLE FOR ESTABLISHED GRASS, 0.6 FT FREEBOARD THROUGHOUT.

THE SWALE DISCHARGES TO THE RECORDED 5485 STORM DRAIN EASEMENT, ALONGSIDE THE 40' ROP CL IV EXTENDING THE FORT FOOTE ROAD CULVERT INLET. THAT MAIN IS BURIED, OD 4.67 FT, 1.5 FT MIN COVER OVER THE CROWN — FINISHED GRADE OVER IT SHALL BE NO LOWER THAN INVERT + 6.17 FT. FILL WHERE EXISTING GROUND IS LOWER. SWALE GRADES AND INVERTS TO BE SET FROM THE FIELD-RUN TOPOGRAPHIC SURVEY. ESTABLISH SOD BEFORE THE CONTRIBUTING AREA IS STABILIZED.


CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

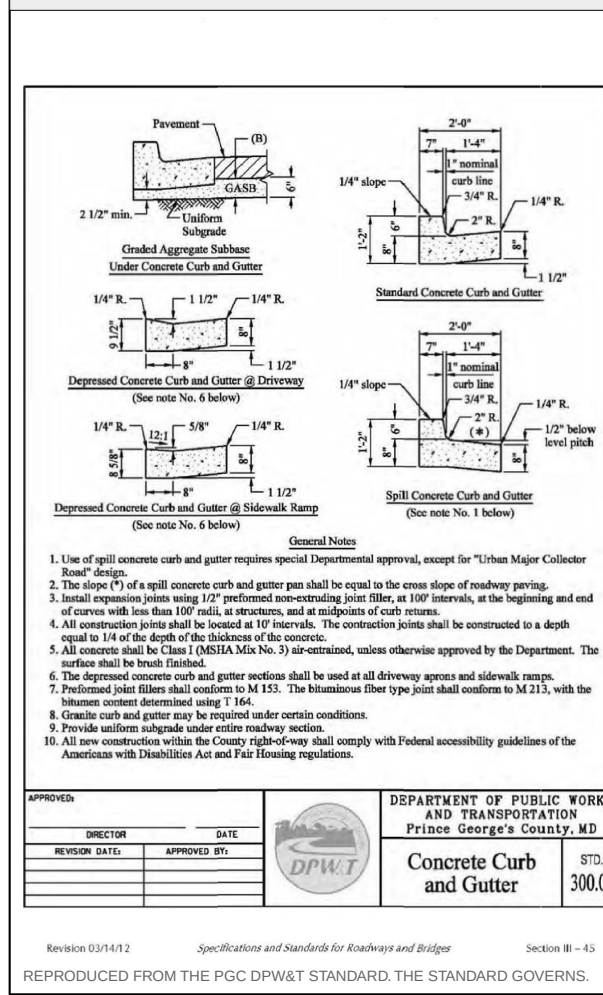

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

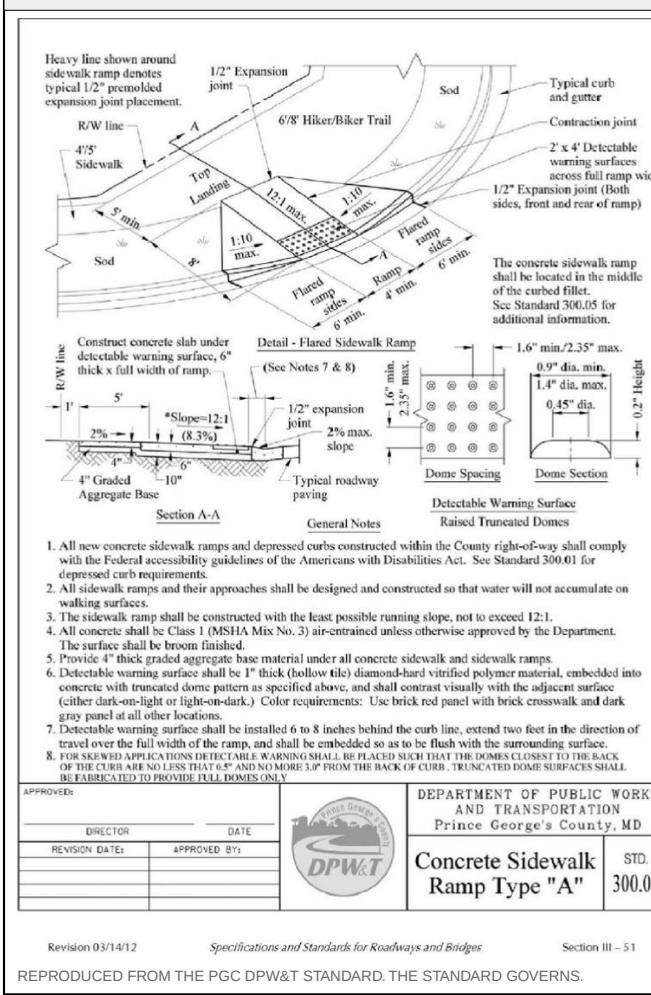

FIELD TOPOGRAPHIC SURVEY — EXISTING CONTOURS — SURVEYED — BM H31A EL. 61.09

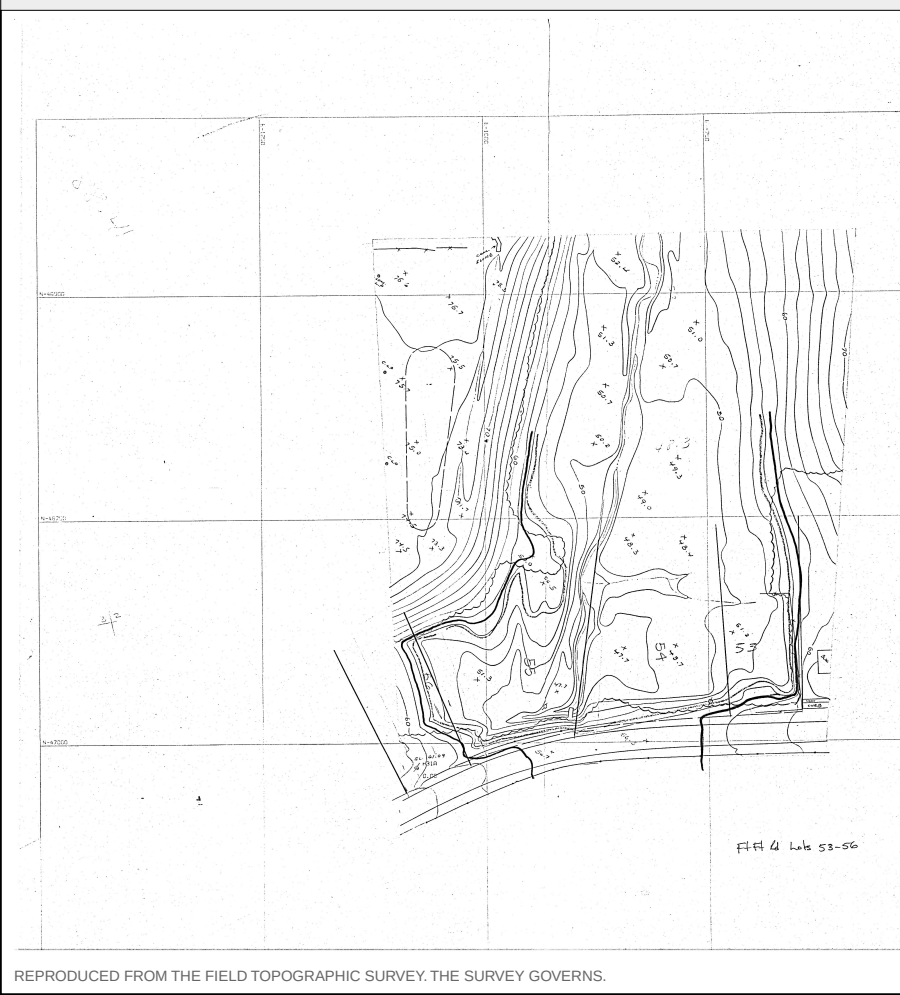

KEALEE

Design, build, deliver

PROJECT
Indian Queen East — LOT 53 & LOT 54 & LOT 55 & LOT 56
ADDRESS
9588 Fort Foote Rd · 9584 Fort Foote Rd · 9580 Fort Foote Rd · 9576 Fort Foote Rd
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-95
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
2 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
- L-100 Landscape and Tree Canopy Plan
- C-400 Grading and Drainage Plan

SITE DATA

ZONE	RSF-95
TAX / PARCEL ID	—
GROSS TRACT AREA	75,178 SF
LOT 53 AREA	12,389 SF
LOT 54 AREA	23,371 SF
LOT 55 AREA	25,733 SF
LOT 56 AREA	13,690 SF
NET LOT AREA	75,184 SF
LOT 53 FRONTAGE	50' MIN
LOT 54 FRONTAGE	50' MIN
LOT 55 FRONTAGE	50' MIN
LOT 56 FRONTAGE	50' MIN
SETBACKS REQUIRED	PROVIDED
FRONT YARD	30'
SIDE YARD	8'
REAR YARD	20'
COVERAGE MAX	PROPOSED
LOT COVERAGE	30%
BUILDING FOOTPRINT	—
DATUM	—
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

- Gross tract area 75,178 SF
- Area of dwelling 4,784 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 75,184 SF
- TOTAL AREA DISTURBED 41,662 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
9588 Fort Foote Rd	58.91	—	59.24	58.24	20'	2
9584 Fort Foote Rd	57.24	—	57.57	56.57	20'	2
9580 Fort Foote Rd	57.27	—	57.80	56.60	20'	2
9576 Fort Foote Rd	60.69	—	61.02	60.02	20'	2

G: garage slab · B: basement · FF: finished floor · SF: subfloor · HT: height · STY: stories · A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQv CF
LOT 53	12,389	15.1%	0.49	0.69	0.20	192
LOT 54	23,371	9.4%	0.92	1.16	0.24	263
LOT 55	25,733	8.2%	1.01	1.24	0.23	266
LOT 56	13,690	14.2%	0.54	0.75	0.21	203
PROJECT TOTAL	75,184	10.8%	2.96	3.84	0.88	924

Peak flows are summed for catchments; Q in cfs. WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install subsurface construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Final grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control until the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — INDIAN QUEEN EAST — BLOCK "E" AND PARTS OF BLOCKS D & F, PLAT BOOK WWW 65, P. 60 (MSA, S1289, S1253), 12TH ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND TAX MAP 113, BLOCK F, GRID 54, PLAT DATED 6 JUNE 1987, APPROVED 28 JUNE 1987 BY THE MARYLAND NATIONAL CAPITAL PARK & PLANNING COMMISSION, PRINCE GEORGE'S COUNTY PLANNING BOARD MAP/CPC RECORD FILE S137863. SCALE 1" = 100' SURVEYOR W. L. MEEKINS, REGISTERED LAND SURVEYOR NO. 384. TOTAL SUBDIVISION AREA 20,981.1 ACRES. PLAT LEGEND FOR PUBLIC SEWER & WATER SYSTEMS ONLY — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY; NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED; THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION; GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01, NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE DATE

LICENSE NO. EXPIRATION DATE

REVISIONS

— NONE —

TREE CANOPY SCHEDULE


Sec. 25-128 Table 1 as amended by CB-021-2024 — 20% of NET tract area on RSF-95, met within 8'. Per-lot planting per Landscape Manual Sec. 4.1(c)(3). Specif trees in the right-of-way count toward canopy under Sec. 25-129.

LOT	NET AREA SF	CANOPY REQ 20% SF	SHADE PROV / REQ	ORN-EVON PROV / REQ	STREET TREES	10-YR CANOPY PROVIDED
LOT 53	12,389	2,478	3 / 3	0 / 2 SHORT	2	NOT ESTABLISHED
LOT 54	23,371	4,674	2 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 55	25,733	5,147	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 56	13,690	2,738	1 / 3 SHORT	0 / 2 SHORT	2	NOT ESTABLISHED
TOTAL	75,184	15,037	9 / 14	0 / 10	6	—


TEN-YEAR CANOPY IS CREDITED FOR SPECIES FROM THE PRINCE GEORGE'S COUNTY LANDSCAPE MANUAL, NO SPECIES HAS BEEN SELECTED ON THIS SET, SO THE CANOPY PROVIDED IS NOT ESTABLISHED AND THE SCHEDULE IS NOT YET BALANCED. EXISTING TREES PRESERVED ALSO COUNT. NO TREE IS PLANTED WITHIN A STORM DRAIN EASEMENT; THE 60 FT 5405 EASEMENT CARRIES THE 48 IN RCP MAIN AND THE 10 FT REAR EASEMENT CARRIES THE DRAINAGE SWALE, BOTH ARE SHOWN ON THIS SHEET AND BOTH ARE EXCLUDED FROM PLANTABLE AREA.

A MAJOR OF THE CANOPY REQUIREMENT IS AVAILABLE UNDER SEC. 25-130.
PER-LOT PLANTING IS SHOWN ON EVERY LOT AS DRAWN, LANDSCAPE MANUAL, SEC. 4.1(c)(3) REQUIRES A MAJOR SHADE AND 3 ORNAMENTAL, OR EVERGREEN TREES ON A LOT OF 20,000 SF OR MORE, AND 3 AND 3 ON A LOT OF 5,000 TO 19,999 SF. NO ORNAMENTAL, OR EVERGREEN TREES ARE DRAWN, AT LEAST ONE SHADE TREE MUST STAND ON THE SOUTH OR WEST SIDE WITHIN 30 FT OF THE DWELLING, AND AT LEAST ONE REQUIRED TREE IN THE FRONT YARD. SPECIES AND FINAL LOCATIONS BY THE LANDSCAPE ARCHITECT.
THE CANOPY REQUIREMENT MUST BE MET ON-SITE UNLESS A VARIANCE IS APPROVED, AND WHERE A GRADING PERMIT IS THE ONLY APPLICATION THE CANOPY NOTES BELONG ON THE GRADING PLAN — ENVIRONMENTAL TECHNICAL MANUAL PART D, SEC. 3.0.

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

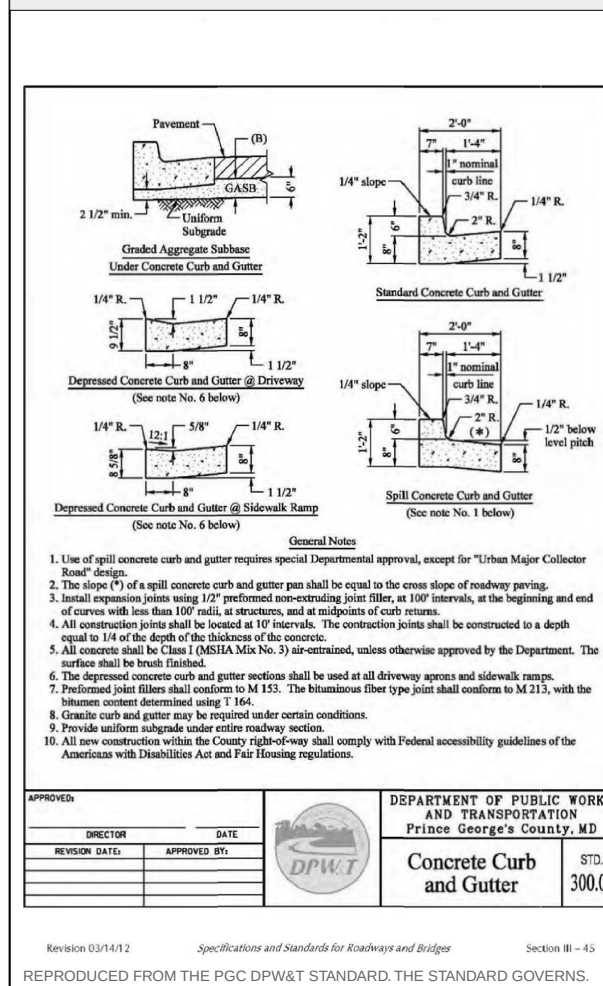

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

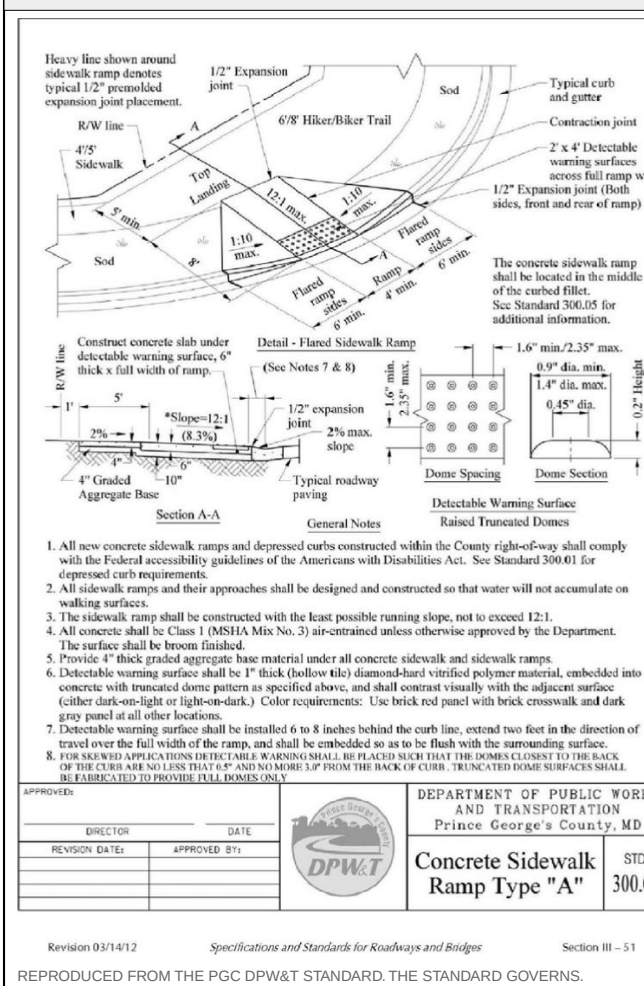

FIELD TOPOGRAPHIC SURVEY — EXISTING CONTOURS — SURVEYED — BM H31A EL. 61.09



GRAPHIC SCALE — 1" = 30'

0 30 60 90 120 FEET

KEALEE

Design, build, deliver

PROJECT
Indian Queen East — LOT 53 & LOT 54 & LOT 55 & LOT 56
ADDRESS
9588 Fort Foote Rd · 9584 Fort Foote Rd · 9580 Fort Foote Rd · 9576 Fort Foote Rd
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-95
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
3 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
- L-100 Landscape and Tree Canopy Plan
- C-400 Grading and Drainage Plan

SITE DATA

ZONE	RSF-95
TAX / PARCEL ID	—
GROSS TRACT AREA	75,178 SF
LOT 53 AREA	12,389 SF
LOT 54 AREA	23,371 SF
LOT 55 AREA	25,733 SF
LOT 56 AREA	13,690 SF
NET LOT AREA	75,184 SF
LOT 53 FRONTAGE	50' MIN
LOT 54 FRONTAGE	50' MIN
LOT 55 FRONTAGE	50' MIN
LOT 56 FRONTAGE	50' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	30' 30'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 6.4%
BUILDING FOOTPRINT	— 4,784 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 75,178 SF
- Area of dwelling 4,784 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 75,184 SF
- TOTAL AREA DISTURBED 41,662 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
9588 Fort Foote Rd	58.91	—	59.24	58.24	20'	2
9584 Fort Foote Rd	57.24	—	57.57	56.57	20'	2
9580 Fort Foote Rd	57.27	—	57.80	56.60	20'	2
9576 Fort Foote Rd	60.69	—	61.02	60.02	20'	2

G: grade; B: basement; FF: finished floor; SF: square foot; HT: height; STY: stories; A DASH IS NOT ZERO; the elevation has not been established and must be set from a field run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQv CF
LOT 53	12,389	15.1%	0.49	0.69	0.20	192
LOT 54	23,371	9.4%	0.92	1.16	0.24	263
LOT 55	25,733	8.2%	1.01	1.24	0.23	266
LOT 56	13,690	14.2%	0.54	0.75	0.21	203
PROJECT TOTAL	75,184	10.8%	2.96	3.84	0.88	924

Peak flows are summed for catchments; Q in cfs; WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES


- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — INDIAN QUEEN EAST — BLOCK "E" AND PARTS OF BLOCKS D & F PLAT BOOK WWW 65, P. 60 (MSA, S1289, S1253), 12TH ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND TAX MAP 113, BLOCK F, GRID 54, PLAT DATED 6 JUNE 1987, APPROVED 28 JUNE 1987 BY THE MARYLAND NATIONAL CAPITAL PARK & PLANNING COMMISSION, PRINCE GEORGE'S COUNTY PLANNING BOARD MAP/CPC RECORD FILE 5137863. SCALE 1" = 100'. SURVEYOR W. L. MEEKINS, REGISTERED LAND SURVEYOR NO. 384. TOTAL SUBDIVISION AREA 20,981.1 ACRES. PLAT LEGEND FOR PUBLIC SEWER & WATER SYSTEMS ONLY — TRANSMIRED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY; NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01, NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

IF REQUIRED NOTE(S) DO NOT FIT THIS SHEET, GRADING CERTIFICATE, STABILIZATION COMPLIANCE PREAMBLE, STANDARD STABILIZATION NOTE, THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

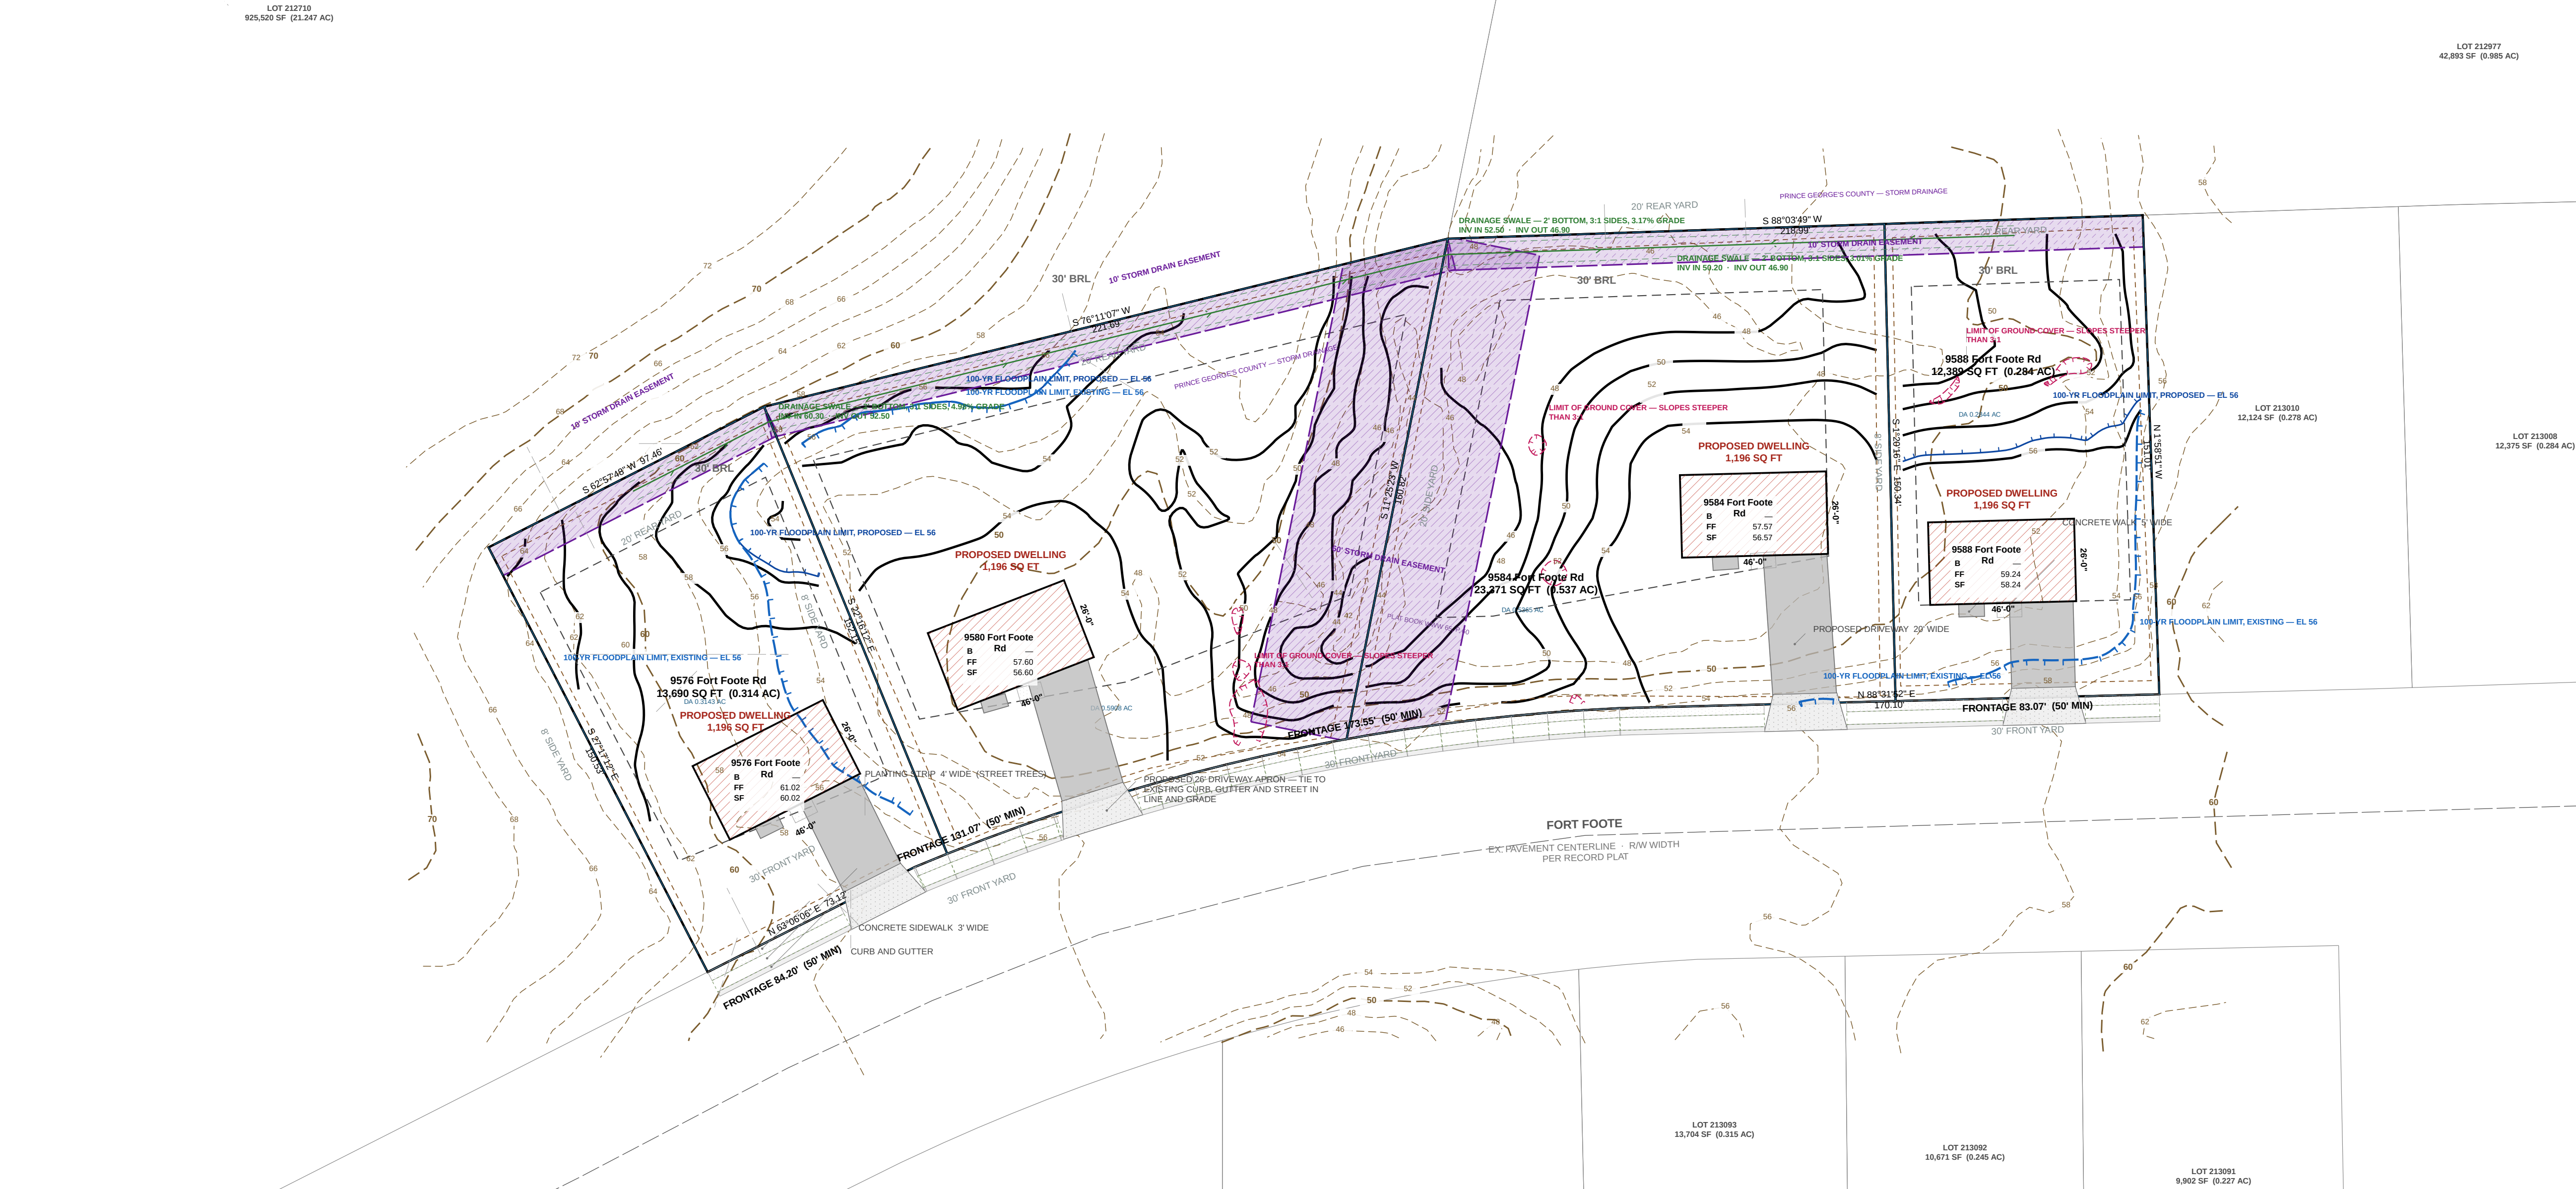

SOILS TABLE

MAP UNIT	MAP UNIT NAME	K-FACT	HYRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

DRAINAGE SWALE SCHEDULE


REACH	LENGTH	GRADE	D.A. (AC)	Q10 (CFS)	Q100 (CFS)	DEPTH	V100 (FPS)	INV IN	INV OUT	CUT
ST-1 — ST-2	110'	3.01%	0.2844	0.59	0.78	0.18'	1.73	50.20	46.90	1.0'
ST-4 — ST-3	157'	4.98%	0.3143	0.65	0.86	0.16'	2.12	60.30	52.50	1.0'
ST-3 — ST-2	177'	3.17%	0.9051	1.87	2.47	0.33'	2.51	52.50	46.90	1.0'

GRADE CONTROL SCHEDULE


POINT	LOT	DESCRIPTION	GROUND	SWALE INV
ST-1	LOT 53	Swale grade break / invert control	51.20	50.20
ST-2	LOT 54	Swale grade break / invert control	47.90	46.90
ST-3	LOT 55	Swale grade break / invert control	53.50	52.50
ST-4	LOT 56	Swale grade break / invert control	61.30	60.30
OUT	—	Swale grade break / invert control	48.90	—

SYSTEM AT THE LOW POINT: 1.7280 AC, Q10 3.57 CFS, Q100 4.71 CFS.
MAX VELOCITY 2.61 FPS AT Q100 — WITHIN THE 5 FPS PERMISSIBLE FOR ESTABLISHED GRASS, 0.6 FT FREEBOARD THROUGHOUT.
THE SWALE DISCHARGES TO THE RECORDED 5485 STORM DRAIN EASEMENT, ALONGSIDE THE 40' ROP CL IV EXTENDING THE FORT FOOTE ROAD CULVERT INLET. THAT MAIN IS BURIED, OD 4.67 FT, 1.5 FT MIN COVER OVER THE CROWN — FINISHED GRADE OVER IT SHALL BE NO LOWER THAN INVERT + 6.17 FT. FILL WHERE EXISTING GROUND IS LOWER. SWALE GRADES AND INVERTS TO BE SET FROM THE FIELD-RUN TOPOGRAPHIC SURVEY. ESTABLISH SOD BEFORE THE CONTRIBUTING AREA IS STABILIZED.

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

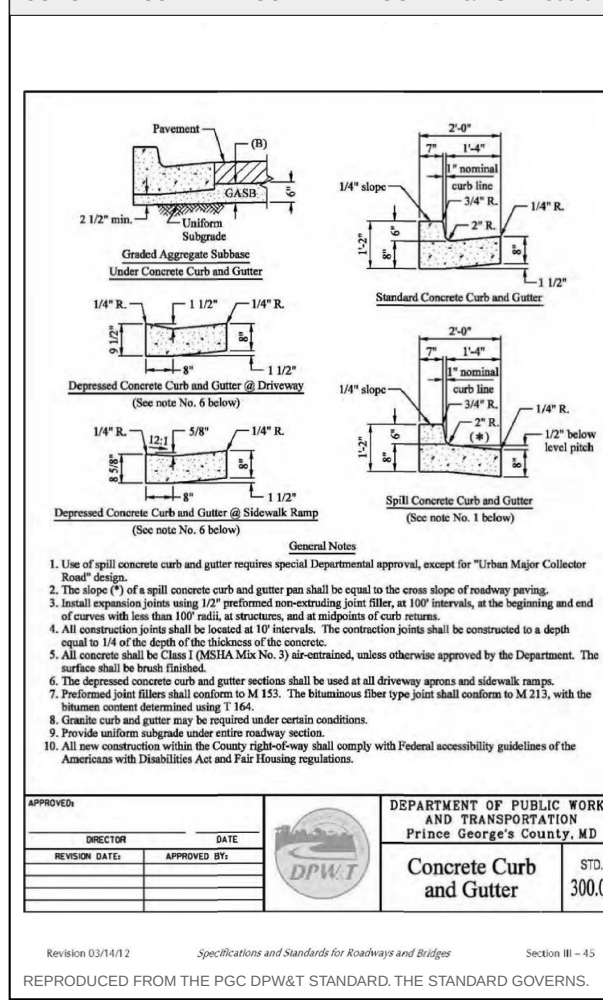

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

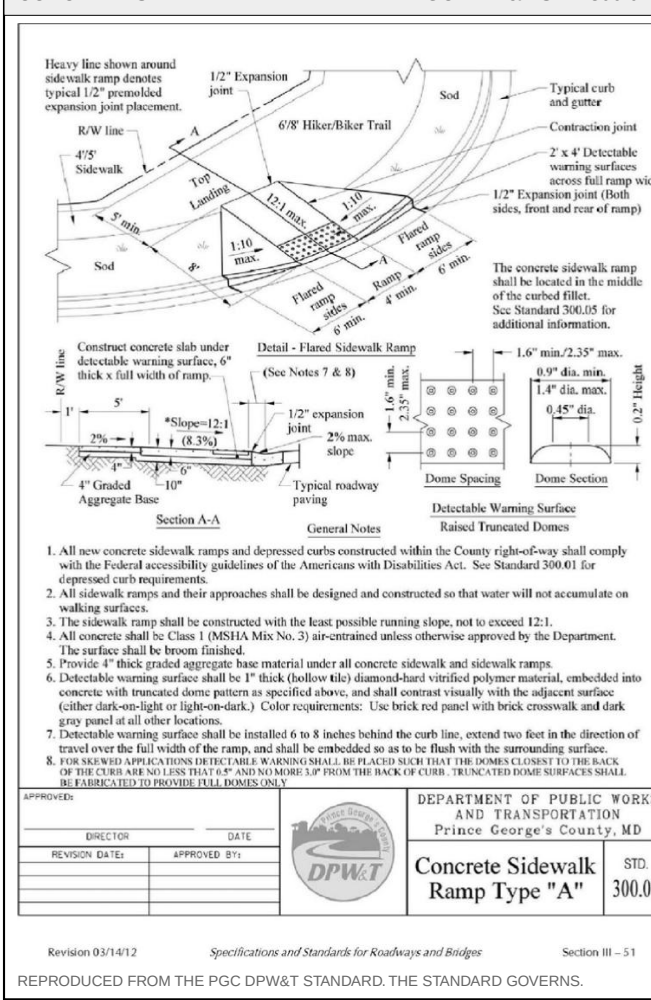

FIELD TOPOGRAPHIC SURVEY — EXISTING CONTOURS — SURVEYED — BM H31A EL. 61.09

