



KEALEE

Design, build, deliver

PROJECT
Indian Queen East — LOT 53 & LOT 54 & LOT 55 & LOT 56
ADDRESS
9588 Fort Foote Rd
JURISDICTION
prince georges md
ZONE
RSF-95
SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
1 OF 2
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION	
PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE	Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY	KEALEE SITE PLAN ENGINE (AUTOMATED)
DESIGNED BY	— (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)
CHECKED BY	— (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)

REVISIONS		
NO.	DATE	DESCRIPTION

SITE DATA	
ZONE	RSF-95
TAX / PARCEL ID	—
GROSS TRACT AREA	75,178 SF, 1.726 AC
LOT 53 AREA	12,389 SF, 0.284 AC
LOT 54 AREA	23,371 SF, 0.537 AC
LOT 55 AREA	25,733 SF, 0.591 AC
LOT 56 AREA	13,690 SF, 0.314 AC
NET LOT AREA	75,184 SF, 1.726 AC
LOT 53 FRONTAGE	50' MIN, 83.07'
LOT 54 FRONTAGE	50' MIN, 173.55'
LOT 55 FRONTAGE	50' MIN, 131.07'
LOT 56 FRONTAGE	50' MIN, 84.20'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	30' 30'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 6.4%
BUILDING FOOTPRINT	— 4,784 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS	
1. Gross tract area	75,178 SF
2. Area of dwelling	4,784 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	75,184 SF
6. TOTAL AREA DISTURBED	41,662 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA						
	G	B	FF	SF	HT	STY
9588 Fort Foote Rd	58.89	50.22	59.22	58.22	20'	2
9584 Fort Foote Rd	55.64	46.97	55.97	54.97	20'	2
9580 Fort Foote Rd	55.67	47.00	56.00	55.00	20'	2
9576 Fort Foote Rd	60.68	52.01	61.01	60.01	20'	2

G: garage slab, B: basement, FF: finished floor, SF: subfloor, HT: height, STY: stories, A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS						
CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 53	12,389	15.1%	0.49	0.69	0.20	182
LOT 54	23,371	9.4%	0.92	1.16	0.24	263
LOT 55	25,733	8.2%	1.01	1.24	0.23	266
LOT 56	13,690	14.2%	0.54	0.75	0.21	203
PROJECT TOTAL	75,184	10.9%	2.96	3.84	0.88	924

Peak flows are summed for catchments; Q in cfs, WQV is the required water quality volume.

SEQUENCE OF CONSTRUCTION		1 DAY
1. Pre-construction meeting		2 DAYS
2. Obtain necessary permits		1 DAY
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation		2 DAYS
4. Install stabilized construction entrance and perimeter sediment control		5 DAYS
5. Rough grade the lot		6 MONTHS
6. Construct dwelling		10 DAYS
7. Install water, sewer and storm services and the driveway		5 DAYS
8. Fine grade and stabilize all disturbed areas		1 DAY
9. Remove sediment control once the inspector gives written permission		

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — INDIAN QUEEN EAST — BLOCK "E" AND PARTS OF BLOCKS D & F PLAT BOOK WWW 65, P. 60 (MSA: 33289, 33293), 32TH ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND, TAX MAP 113, BLOCK F, GRID E4, PLAT DATED 6 JUNE 1987, APPROVED 26 JUNE 1987 BY THE MARYLAND NATIONAL CAPITAL PARK & PLANNING COMMISSION, PRINCE GEORGE'S COUNTY PLANNING BOARD, M-NCPPC RECORD FILE 5197863. SCALE 1" = 100'. SURVEYOR W. L. WICKENS, REGISTERED LAND SURVEYOR NO. 384, TOTAL SUBDIVISION AREA 20,981.1 ACRES. PLAT LEGEND: FOR PUBLIC SEWER & WATER SYSTEMS ONLY. TRANSFERRED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSIONED CURB AT THE APRON PER DPW&T STD. 300.01, NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

REVISIONS

— NONE —



SOILS TABLE

64 NRCS 55URGO — PGC Code Sec. 32-132(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex,	37	No	C	Moderately well drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

DRAINAGE SWALE SCHEDULE

Method: NOAA Atlas 14 - Manning n = 0.041, 2' bottom, 3:1 sides


REACH	LENGTH	GRADE	D.A. (AC)	Q10 (CFS)	Q100 (CFS)	DEPTH	V100 (FPS)	INV IN	INV OUT	CUT
ST-1 — ST-2	110'	3.01%	0.2844	0.59	0.78	0.18'	1.73	50.20	46.90	1.0'
ST-4 — ST-3	157'	4.98%	0.3143	0.65	0.86	0.16'	2.12	60.30	52.50	1.0'
ST-3 — ST-2	177'	3.17%	0.9051	1.87	2.47	0.33'	2.51	52.50	46.90	1.0'

GRADE CONTROL SCHEDULE


POINT	LOT	DESCRIPTION	GROUND	SWALE INV
ST-1	LOT 53	Swale grade break / invert control	51.20	50.20
ST-2	LOT 54	Swale grade break / invert control	47.90	46.90
ST-3	LOT 55	Swale grade break / invert control	53.50	52.50
ST-4	LOT 56	Swale grade break / invert control	61.30	60.30
OUT	—	Swale grade break / invert control	48.90	—

SYSTEM AT THE LOW POINT: 1.7260 AC, Q10 3.57 CFS, Q100 4.71 CFS.
MAX VELOCITY 2.61 FPS AT Q100 — WITHIN THE 5 FPS PERMISSIBLE FOR ESTABLISHED GRASS, 0.5 FT FREEBOARD THROUGHOUT.
THE SWALE DISCHARGES TO THE RECORDED 54RS STORM DRAIN EASEMENT, ALONGSIDE THE 40" RCP CL IV EXTENDING THE FORT FOOTE ROAD CULVERT INLET.
THAT MAIN IS BURIED, OD 4.17 FT, 1.5 FT MIN COVER OVER THE CROWN — FINISHED GRADE OVER IT SHALL BE NO LOWER THAN INVERT + 5.67 FT FILL WHERE EXISTING GROUND IS LOWER.
SWALE GRADES AND INVERTS TO BE SET FROM THE FIELD-RUN TOPOGRAPHIC SURVEY, ESTABLISH SOD BEFORE THE CONTRIBUTING AREA IS STABILISED.

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

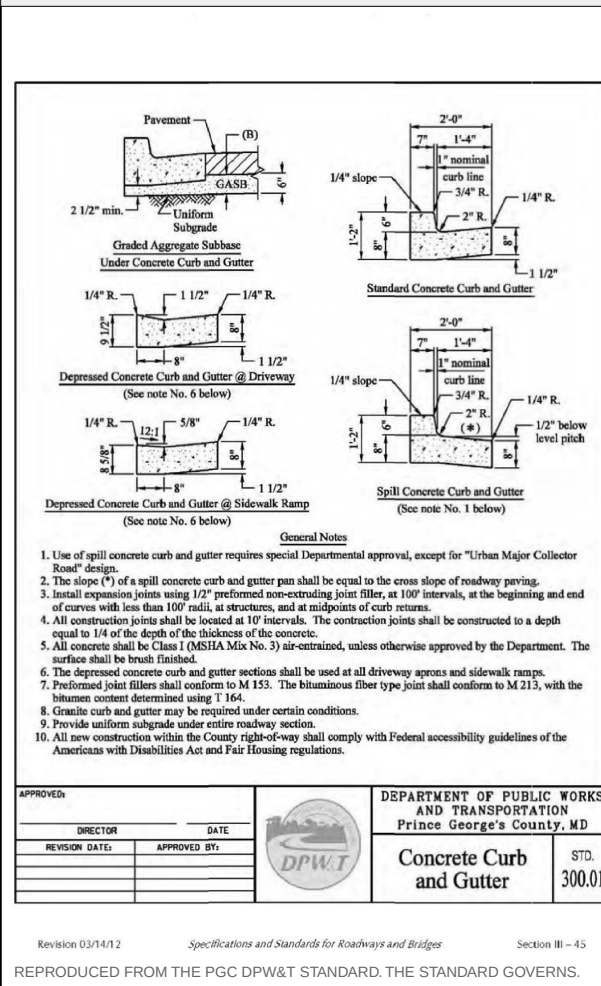


CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

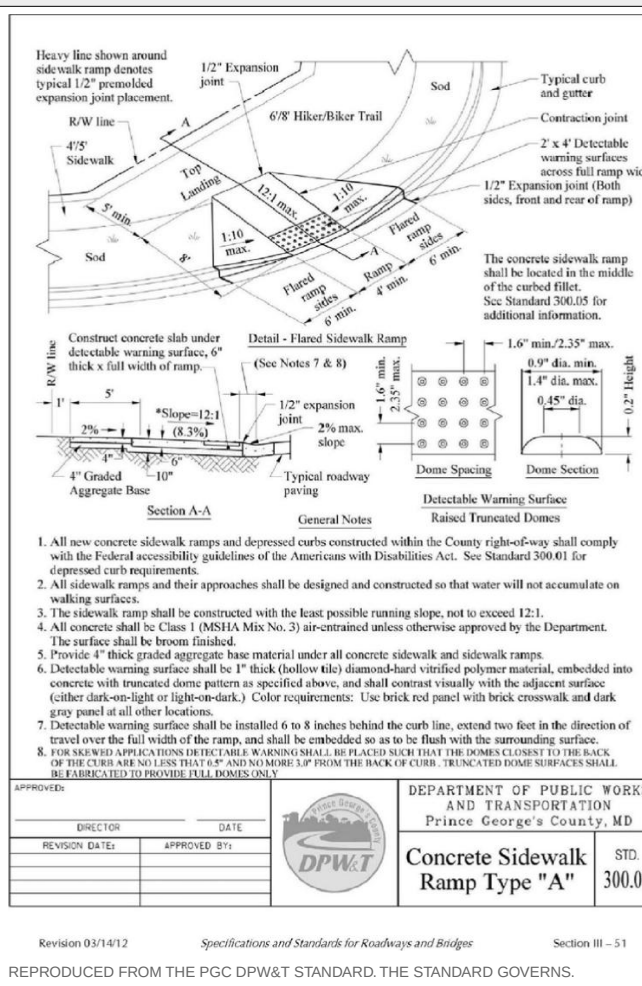

FIELD TOPOGRAPHIC SURVEY — EXISTING CONTOURS — SURVEYED — BM H31A EL. 61.09



GRAPHIC SCALE — 1" = 30'
0 30 60 90 120 FEET



design, build, deliver

3-REQUIRED NOTE(S) DO NOT FIT THIS SHEET: GRADING CERTIFICATE; STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE
THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

GRAPHIC SCALE — 1" = 30'



A horizontal line with vertical tick marks at intervals of 30 feet. The labels 30, 60, 90, and 120 FEET are placed below the line.