

PORTER SUBDIVISION | LOTS 1 & 2

1005 & 1009 ROLLINS AVENUE, PRINCE GEORGE'S COUNTY, MARYLAND



PROJECT AND DRAWING BASIS

Two detached dwellings. Boundary control: recorded Porter Subdivision plat, PM 231 / 50. Existing contours: 2-foot interval, NAVD88. Proposed dwelling footprints: 46 ft x 26 ft, including the optional one-car garage.

Recorded areas: Lot 1 9,598 SF; Lot 2 8,008 SF; net lots 17,606 SF; public dedication 4,219 SF; gross tract 21,825 SF.

Tax Map 73, Grid B3; former Parcel 326, Preliminary Plan 4-06111; Record File 5-09121. Zoning: RSF-65 (R-55 at plat recording).

MEASURED DWELLING CLEARANCES

LOT	FRONT	SIDES	REAR
Lot 1	31.00 ft	8.40 / 10.60 ft	62.86 ft
Lot 2	31.00 ft	8.26 / 11.65 ft	Triangular lot

Design lines: front 30 ft; sides 8 ft; Lot 1 rear 20 ft. Lot 2 uses the applicant-directed triangular-lot side-yard treatment. The table reports actual geometry and does not represent an agency determination.

LOT COVERAGE

LOT	DWELLING	FOOTPRINT / LOT
Lot 1	1,196 SF	12.46%
Lot 2	1,196 SF	14.94%

35% maximum shown in the project zoning criteria. Ratios above are dwelling footprint only. Site paving is accounted for separately in the drainage calculations.

UTILITY CONNECTIONS

Both lots: water and sanitary connections toward the existing 8-inch mains in Modupeola Way, through the 20-foot WSSC corridor on Lot 13. Private utility segment runs from the Lot 1 / 12 / 13 corner toward the Lot 1 / 2 / 12 corner.

WSSC connection reference: C-004. Utility routing is preliminary; junctions, fittings, separation, depths and main tie-ins require coordinated WSSC design. Private easement limits are governed by the recorded instrument.

LEGEND

- Recorded lot line
- Building restriction line
- Utility easement
- W - Water house connection
- S - Sanitary house connection

DW-1 / DW-2 identify reserved stormwater locations. The staff report describes infiltration drywells under Concept 41230-2006-00; final approved sizing and outlet details are required before construction.


BOUNDARY CALLS OF RECORD - PM 231 / 50

LINE	BEARING	DISTANCE
B1	N 79-29-14 E	176.36 ft
B2	S 10-30-46 E	65.00 ft
B3	N 79-29-14 E	118.96 ft
B4	N 51-58-25 W	86.72 ft
B5	S 10-30-46 E	134.64 ft
B6	N 51-58-25 W	179.66 ft


B3 is the common Lot 1 / Lot 2 boundary. Bearings are stated in the direction lettered on the recorded plat. PUE: 10 ft along each Rollins frontage; public dedication: 20 ft.

PORTER SUBDIVISION | LOTS 1 & 2

1005 & 1009 ROLLINS AVENUE, PRINCE GEORGE'S COUNTY, MARYLAND

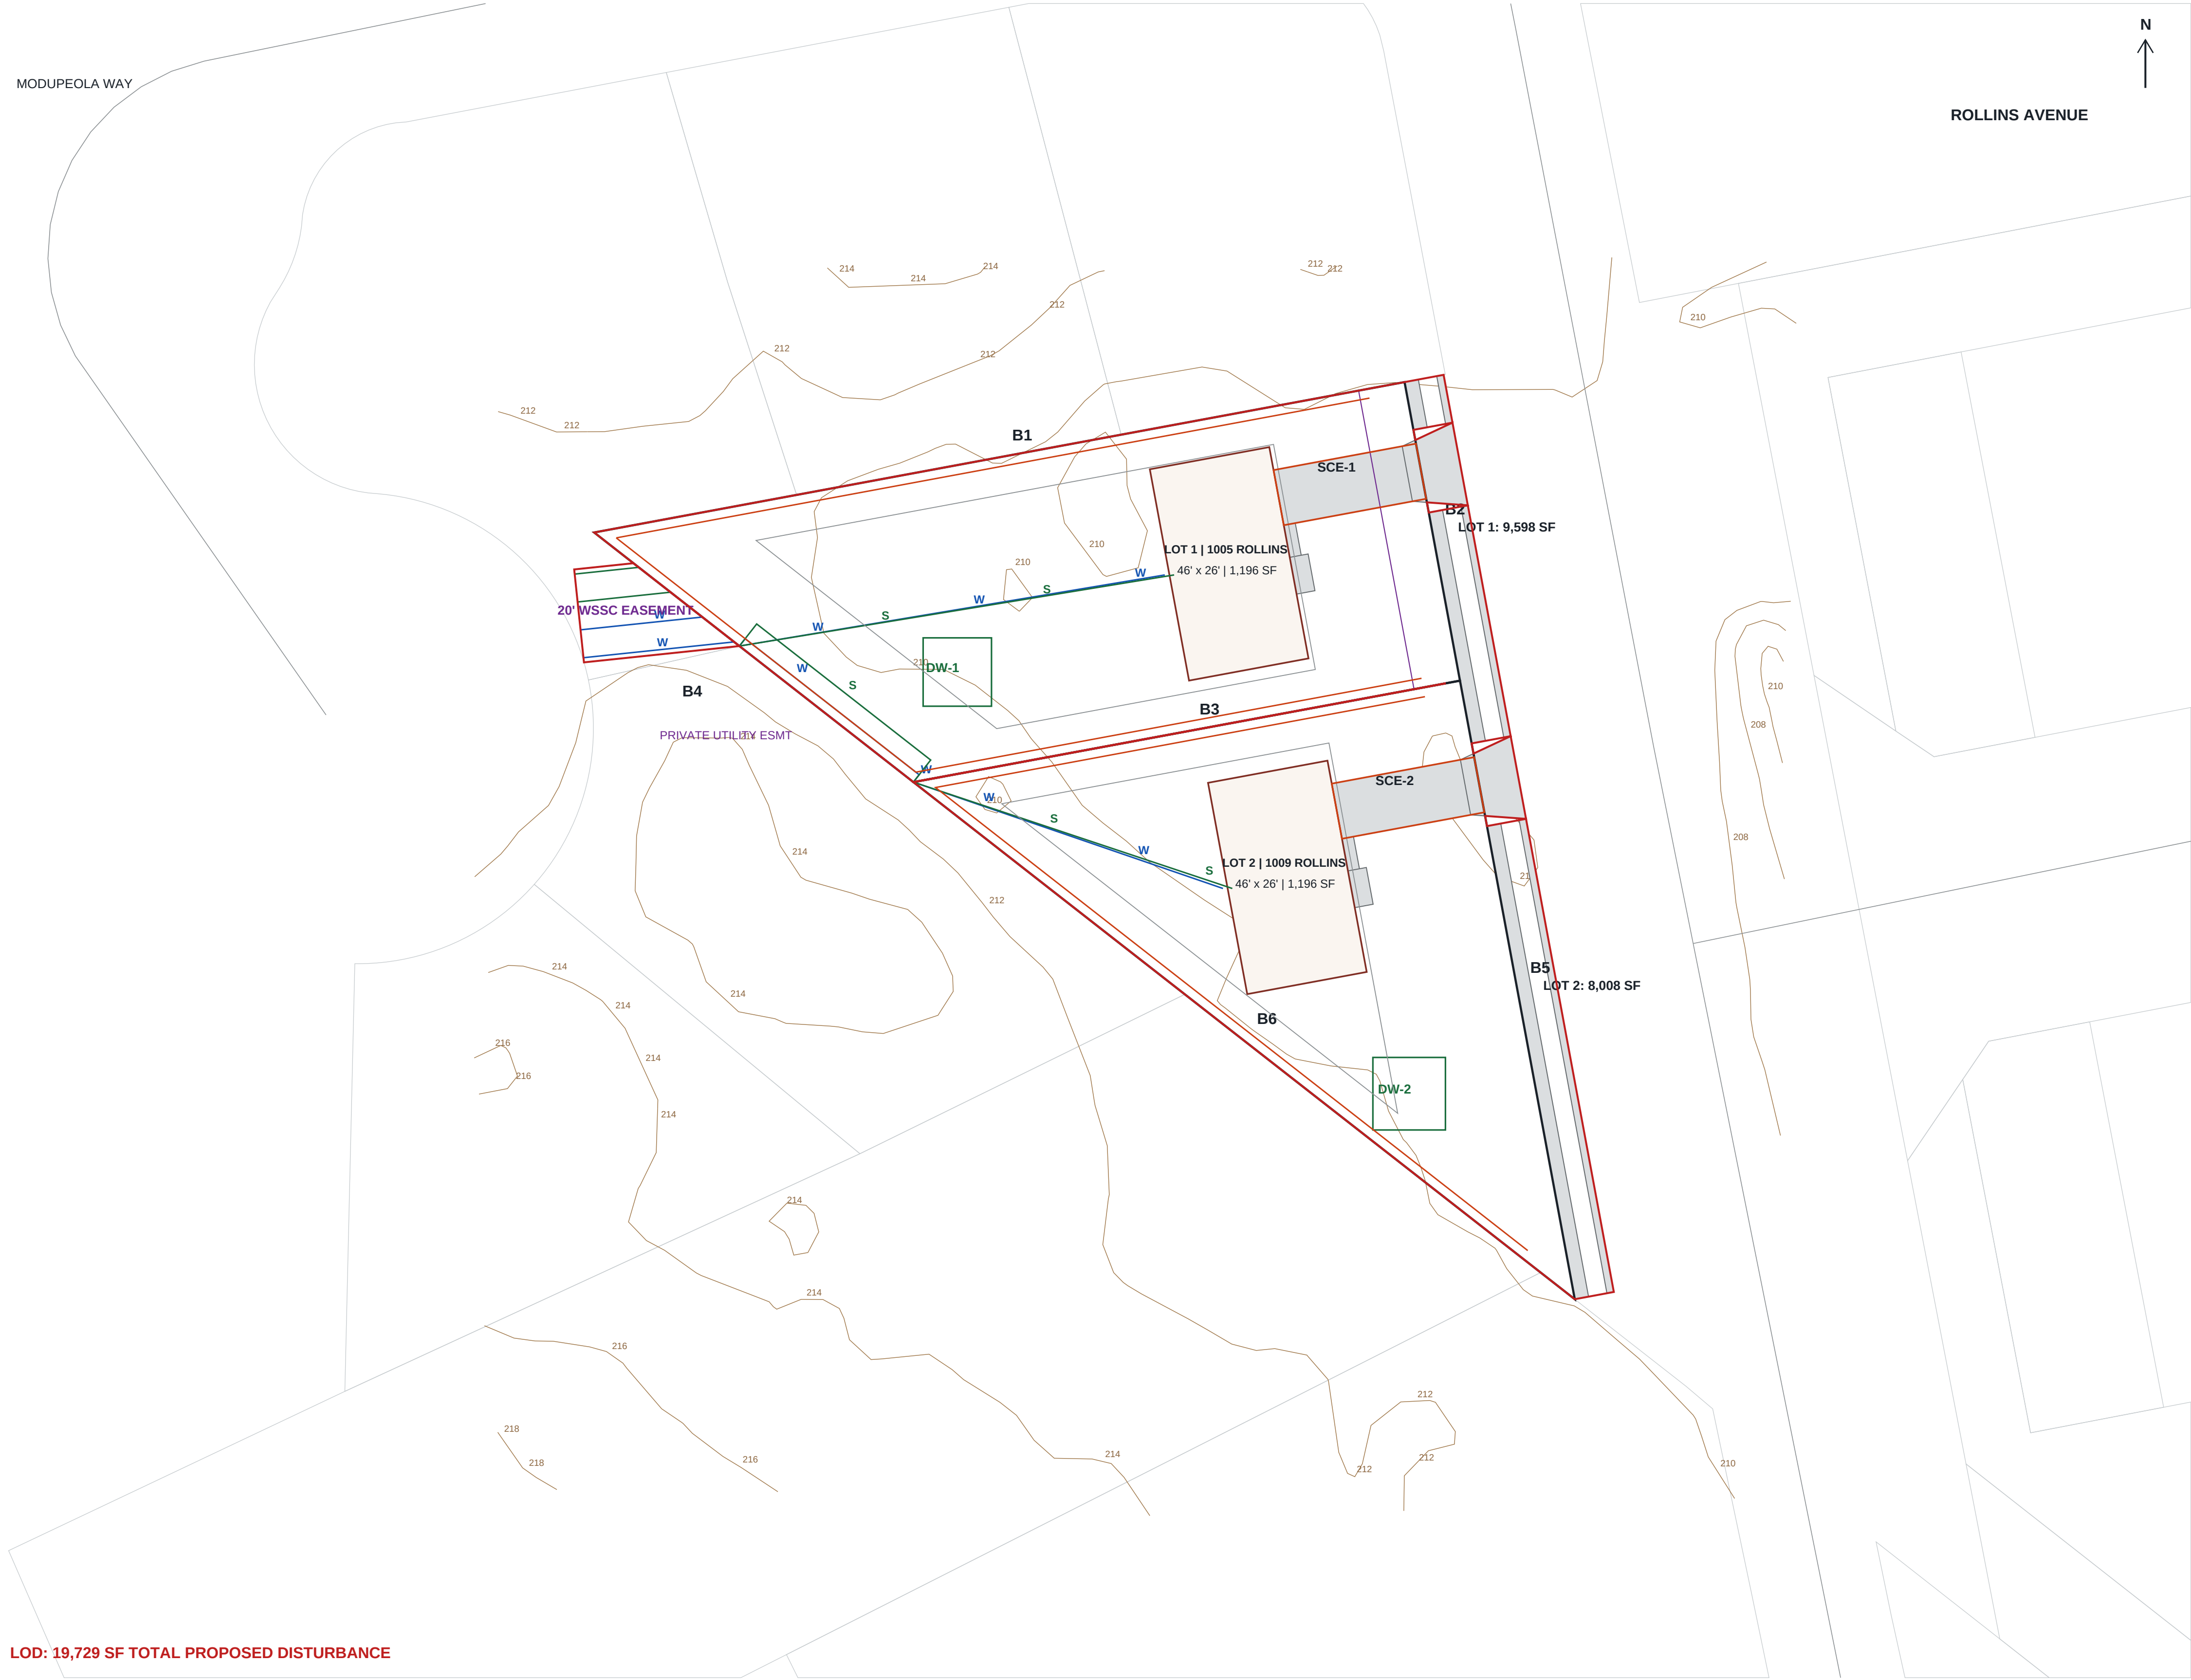

LOD: 19,729 SF TOTAL PROPOSED DISTURBANCE

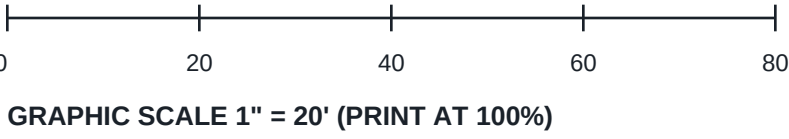

NAD83 / NAVD88 FEET

DISTURBANCE TAKEOFF

WORK AREA	POLYGON AREA
Lot 1	9,598.55 SF
Lot 2	8,008.69 SF
Frontage outside net lots	1,659.11 SF
Public utility corridor	461.99 SF
Total union (rounded up)	19,729 SF

LOD includes the full two-lot work area, shown frontage construction and the offsite utility corridor. Areas are computed from a polygon union, with no overlap double-counting. Recorded lot areas govern property data; polygon areas govern this takeoff.

CONSTRUCTION SEQUENCE

- Obtain applicable permits and approved construction documents; hold the preconstruction meeting.
- Locate utilities before excavation. Install perimeter controls inside the work limits and protect adjoining land.
- Establish stabilized access at the proposed driveways (SCE-1 / SCE-2); maintain the public pedestrian route.
- Stage Lot 1 then Lot 2; expose only the area under active construction. Keep stockpiles and washout within controlled work areas.
- Construct foundations and utility services; protect reserved drywell locations from compaction and sediment.
- Complete permanent drainage facilities after contributing areas are stabilized; complete frontage and final landscaping.
- Remove temporary controls only after permanent stabilization and inspector authorization.

STANDARD STABILIZATION NOTE

Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1); and b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

CONTROL DETAILS AND LIMITS

Orange dashed perimeter line: proposed sediment barrier, placed inside lot limits. Final barrier type, lengths, storage and tributary area must follow the approved sediment-control design. SCE footprints use the driveway work areas; extend stabilized access as required by the approving authority. This layout does not claim erosion-control approval.

PORTER SUBDIVISION | LOTS 1 & 2

1005 & 1009 ROLLINS AVENUE, PRINCE GEORGE'S COUNTY, MARYLAND

RECORDED PLAT CONDITIONS - COMPLETE

1. Development of this property shall be in accordance with the approved Stormwater Management Concept Plan 41230-2006-00, or any approved revisions thereafter.
2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4916 Z 08 commitments.
3. The applicant, his heirs, successors and or assignees shall utilize an abutting driveway design, constructed per DPW&T standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue, if deemed appropriate by DPW&T upon the issuance of street construction permits.

ADJOINERS OF RECORD

NORTHEAST: LOTS 13, 14 AND 15 - Addition to Pleasant Park, Plat Book VJ 185, Plat 76

SOUTHWEST: LOT 12 - Addition to Pleasant Park, Plat Book VJ 185, Plat 76

NORTHWEST: OUTLOT A - Addition to Pleasant Park, Plat Book VJ 185, Plat 76

NORTHWEST: JEAN M. YOUNG - L.14377 F.589

ACROSS ROLLINS AVENUE: MAITLAND W. DADE - L.11452 F.473

ACROSS ROLLINS AVENUE: PATRICIA L. FERRELL - L.12766 F.721

ACROSS ROLLINS AVENUE: VALLE GARGAN SUBDIVISION - P.B. WWW 19, P. 41

ACROSS ROLLINS AVENUE: EDWARD B. ROLLINS, TRUSTEE, ET AL - L.12790 F.155

BOUNDARY CONTROL

The recorded plat supplies the boundary survey/control for this drawing. Original owner/surveyor signatures apply to that recorded instrument. Horizontal control: NAD83. Existing contour interval: 2 ft. Field control and proposed grades require survey and civil design coordination.

POINT	EASTING NAD83	NORTHING NAD83
A	1340254.7066	440194.1578
B	1340447.7902	440229.9981
C	1340488.3440	440011.4450

LOT DRAINAGE CALCULATIONS

PARAMETER	LOT 1	LOT 2
Area (SF)	9598	8008
Roof (SF)	1,196	1,196
Impervious union (SF)	1617.50	1617.50
Impervious (%)	16.85	20.20
Composite C pre	0.250	0.250
Composite C post	0.368	0.391
Tc / I10	5 min / 6.71 in/hr	5 min / 6.71 in/hr
Q10 pre (CFS)	0.370	0.308
Q10 post (CFS)	0.544	0.483
WQv screening (CF)	161.3	154.7

Q = C i A; A in acres. Weighted C uses roof/paving 0.95 and pervious area 0.25. Impervious areas use geometric unions of the dwelling, driveway, stoop and corrected leadwalk.

Rainfall: NOAA Atlas 14, Volume 2 Version 3, 38.8752 N / 76.9019 W; 10-year, 5-minute intensity 6.71 in/hr. Tc is the existing model's five-minute minimum; final drainage design must validate the actual flow path and surface classification.

WQv = P Rv A / 12; P = 1.0 inch; Rv = 0.05 + 0.009 I (I in percent). This is a screening water-quality volume, not proof of current ESDv, recharge or channel-protection compliance.

Frontage paving is excluded from lot catchments and listed in the disturbance takeoff. Final drainage analysis must include its receiving system and all upstream tributary areas.

GRADING AND DRAINAGE CRITERIA

Design positive drainage away from foundations and protect adjoining land. Show finished-floor, corner, garage, critical spot and facility elevations in the final engineering design.

Coordinate driveway profiles with garage slabs and existing curb grades. County site/road checklist: driveway 1% minimum / 12.5% maximum; provide compliant accessible pedestrian cross slopes.

Keep utility trenching, trees, building projections and drywell construction clear of each other. Protect the proposed drywell receiving areas during construction.

ENVIRONMENTAL RECORD

M-NCPPC staff report for Preliminary Plan 4-06111 documents NRI/116/06 (September 21, 2006), a woodland exemption issued June 7, 2007, and Concept 41230-2006-00 (May 21, 2007) proposing drywells on both lots.

That review reports no streams, wetlands, 100-year floodplain or Marlboro clay on site and identifies Adelphia, Sassafras and Westphalia soil series. These are historical agency findings, not new onsite measurements. The exemption letter and current concept documentation remain application attachments.

Source: M-NCPPC, Porter Property staff report, 4-06111, pages 2-3. A copy is included in the source folder.

PARCEL-INTERSECTION SOIL MAPPING

AeB: Adelphia-Holmdel-Urban land complex, 0 to 5 percent slopes; HSG B/D; Somewhat poorly drained; hydric No; K .24.

AeB: Adelphia-Holmdel-Urban land complex, 0 to 5 percent slopes; HSG C; Moderately well drained; hydric No; K .37.

AeB: Adelphia-Holmdel-Urban land complex, 0 to 5 percent slopes; HSG D; None; hydric No; K None.

Soil map-unit properties are regional mapping data. Facility design requires site-specific infiltration and groundwater investigation.

BUILDING DESIGN COORDINATION

Kingsworth drawing 260811 provides a 36-foot main house with an optional 10-foot ONE-CAR garage and a nominal 26-foot depth. The 46 x 26 site footprint includes that garage. A two-car garage is not represented by the source drawing.

The supplied architectural source contains a basement foundation and rear areaway. The actual basement/areaway option, floor heights and wall sections must be coordinated with the full building design. This civil revision does not purport to supply missing architectural or structural sheets.

PROFESSIONAL CERTIFICATION

I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional engineer under the laws of the State of Maryland.

SIGNATURE / DATE

LICENSE NUMBER / EXPIRATION

OWNER / APPLICANT / CONTACT

PORTER SUBDIVISION | LOTS 1 & 2

1005 & 1009 ROLLINS AVENUE, PRINCE GEORGE'S COUNTY, MARYLAND

DETAILS: USE THE COUNTY STANDARD; REPRODUCED DETAILS ARE NOT TO SCALE

Pavement (B)
2 1/2" min.
Uniform Subgrade
Graded Aggregate Subbase
Under Concrete Curb and Gutter

1/4" slope
1"-2"
6"
7"
1'-4"
1" nominal curb line
3/4" R.
1/4" R.
1 1/2"
Standard Concrete Curb and Gutter

1/4" R.
1 1/2"
1/4" R.
9 1/2"
8"
1 1/2"
Depressed Concrete Curb and Gutter @ Driveway
(See note No. 6 below)

1/4" R.
12:1
5/8"
1/4" R.
8 5/8"
8"
1 1/2"
Depressed Concrete Curb and Gutter @ Sidewalk Ramp
(See note No. 6 below)

1/4" slope
1"-2"
6"
7"
1'-4"
1" nominal curb line
2" R.
1/4" R.
1/2" below level pitch
Spill Concrete Curb and Gutter
(See note No. 1 below)

General Notes

- Use of spill concrete curb and gutter requires special Departmental approval, except for "Urban Major Collector Road" design.
- The slope (*) of a spill concrete curb and gutter pan shall be equal to the cross slope of roadway paving.
- Install expansion joints using 1/2" preformed non-extruding joint filler, at 100' intervals, at the beginning and end of curves with less than 100' radii, at structures, and at midpoints of curb returns.
- All construction joints shall be located at 10' intervals. The contraction joints shall be constructed to a depth equal to 1/4 of the depth of the thickness of the concrete.
- All concrete shall be Class I (MSHA Mix No. 3) air-entrained, unless otherwise approved by the Department. The surface shall be brush finished.
- The depressed concrete curb and gutter sections shall be used at all driveway aprons and sidewalk ramps.
- Preformed joint fillers shall conform to M 153. The bituminous fiber type joint shall conform to M 213, with the bitumen content determined using T 164.
- Granite curb and gutter may be required under certain conditions.
- Provide uniform subgrade under entire roadway section.
- All new construction within the County right-of-way shall comply with Federal accessibility guidelines of the Americans with Disabilities Act and Fair Housing regulations.

APPROVED:

DIRECTOR

DATE

REVISION DATE:

APPROVED BY:

DEPARTMENT OF PUBLIC WORKS
AND TRANSPORTATION
Prince George's County, MD

Concrete Curb
and Gutter

STD.
300.01

Heavy line shown around sidewalk ramp denotes typical 1/2" preformed expansion joint placement.

R/W line
4/5' Sidewalk
5' min.
Sod
6/8' Hiker/Biker Trail
Top Landing
12:1 max.
1:10 max.
1:10 max.
Flared ramp sides
6' min.
4' min.
6' min.
1/2" Expansion joint
Typical curb and gutter
Contraction joint
2' x 4' Detectable warning surfaces across full ramp width
1/2" Expansion joint (Both sides, front and rear of ramp)

The concrete sidewalk ramp shall be located in the middle of the curbed fillet. See Standard 300.05 for additional information.

Construct concrete slab under detectable warning surface, 6" thick x full width of ramp.

Detail - Flared Sidewalk Ramp
(See Notes 7 & 8)

1/2" expansion joint
2% max. slope
Typical roadway paving
4" Graded Aggregate Base
10"

Section A-A

General Notes

1.6" min./2.35" max.
0.9" dia. min.
1.4" dia. max.
0.45" dia.
0.2" Height

Detectable Warning Surface
Raised Truncated Domes

- All new concrete sidewalk ramps and depressed curbs constructed within the County right-of-way shall comply with the Federal accessibility guidelines of the Americans with Disabilities Act. See Standard 300.01 for depressed curb requirements.
- All sidewalk ramps and their approaches shall be designed and constructed so that water will not accumulate on walking surfaces.
- The sidewalk ramp shall be constructed with the least possible running slope, not to exceed 12:1.
- All concrete shall be Class 1 (MSHA Mix No. 3) air-entrained unless otherwise approved by the Department. The surface shall be broom finished.
- Provide 4" thick graded aggregate base material under all concrete sidewalk and sidewalk ramps.
- Detectable warning surface shall be 1" thick (hollow tile) diamond-hard vitrified polymer material, embedded into concrete with truncated dome pattern as specified above, and shall contrast visually with the adjacent surface (either dark-on-light or light-on-dark.) Color requirements: Use brick red panel with brick crosswalk and dark gray panel at all other locations.
- Detectable warning surface shall be installed 6 to 8 inches behind the curb line, extend two feet in the direction of travel over the full width of the ramp, and shall be embedded so as to be flush with the surrounding surface.
- FOR SKEWED APPLICATIONS DETECTABLE WARNING SHALL BE PLACED SUCH THAT THE DOMES CLOSEST TO THE BACK OF THE CURB ARE NO LESS THAN 0.5" AND NO MORE 3.0" FROM THE BACK OF CURB. TRUNCATED DOME SURFACES SHALL BE FABRICATED TO PROVIDE FULL DOMES ONLY.

APPROVED:

DIRECTOR

DATE


REVISION DATE:

APPROVED BY:

DEPARTMENT OF PUBLIC WORKS
AND TRANSPORTATION
Prince George's County, MD

Concrete Sidewalk
Ramp Type "A"

STD.
300.07

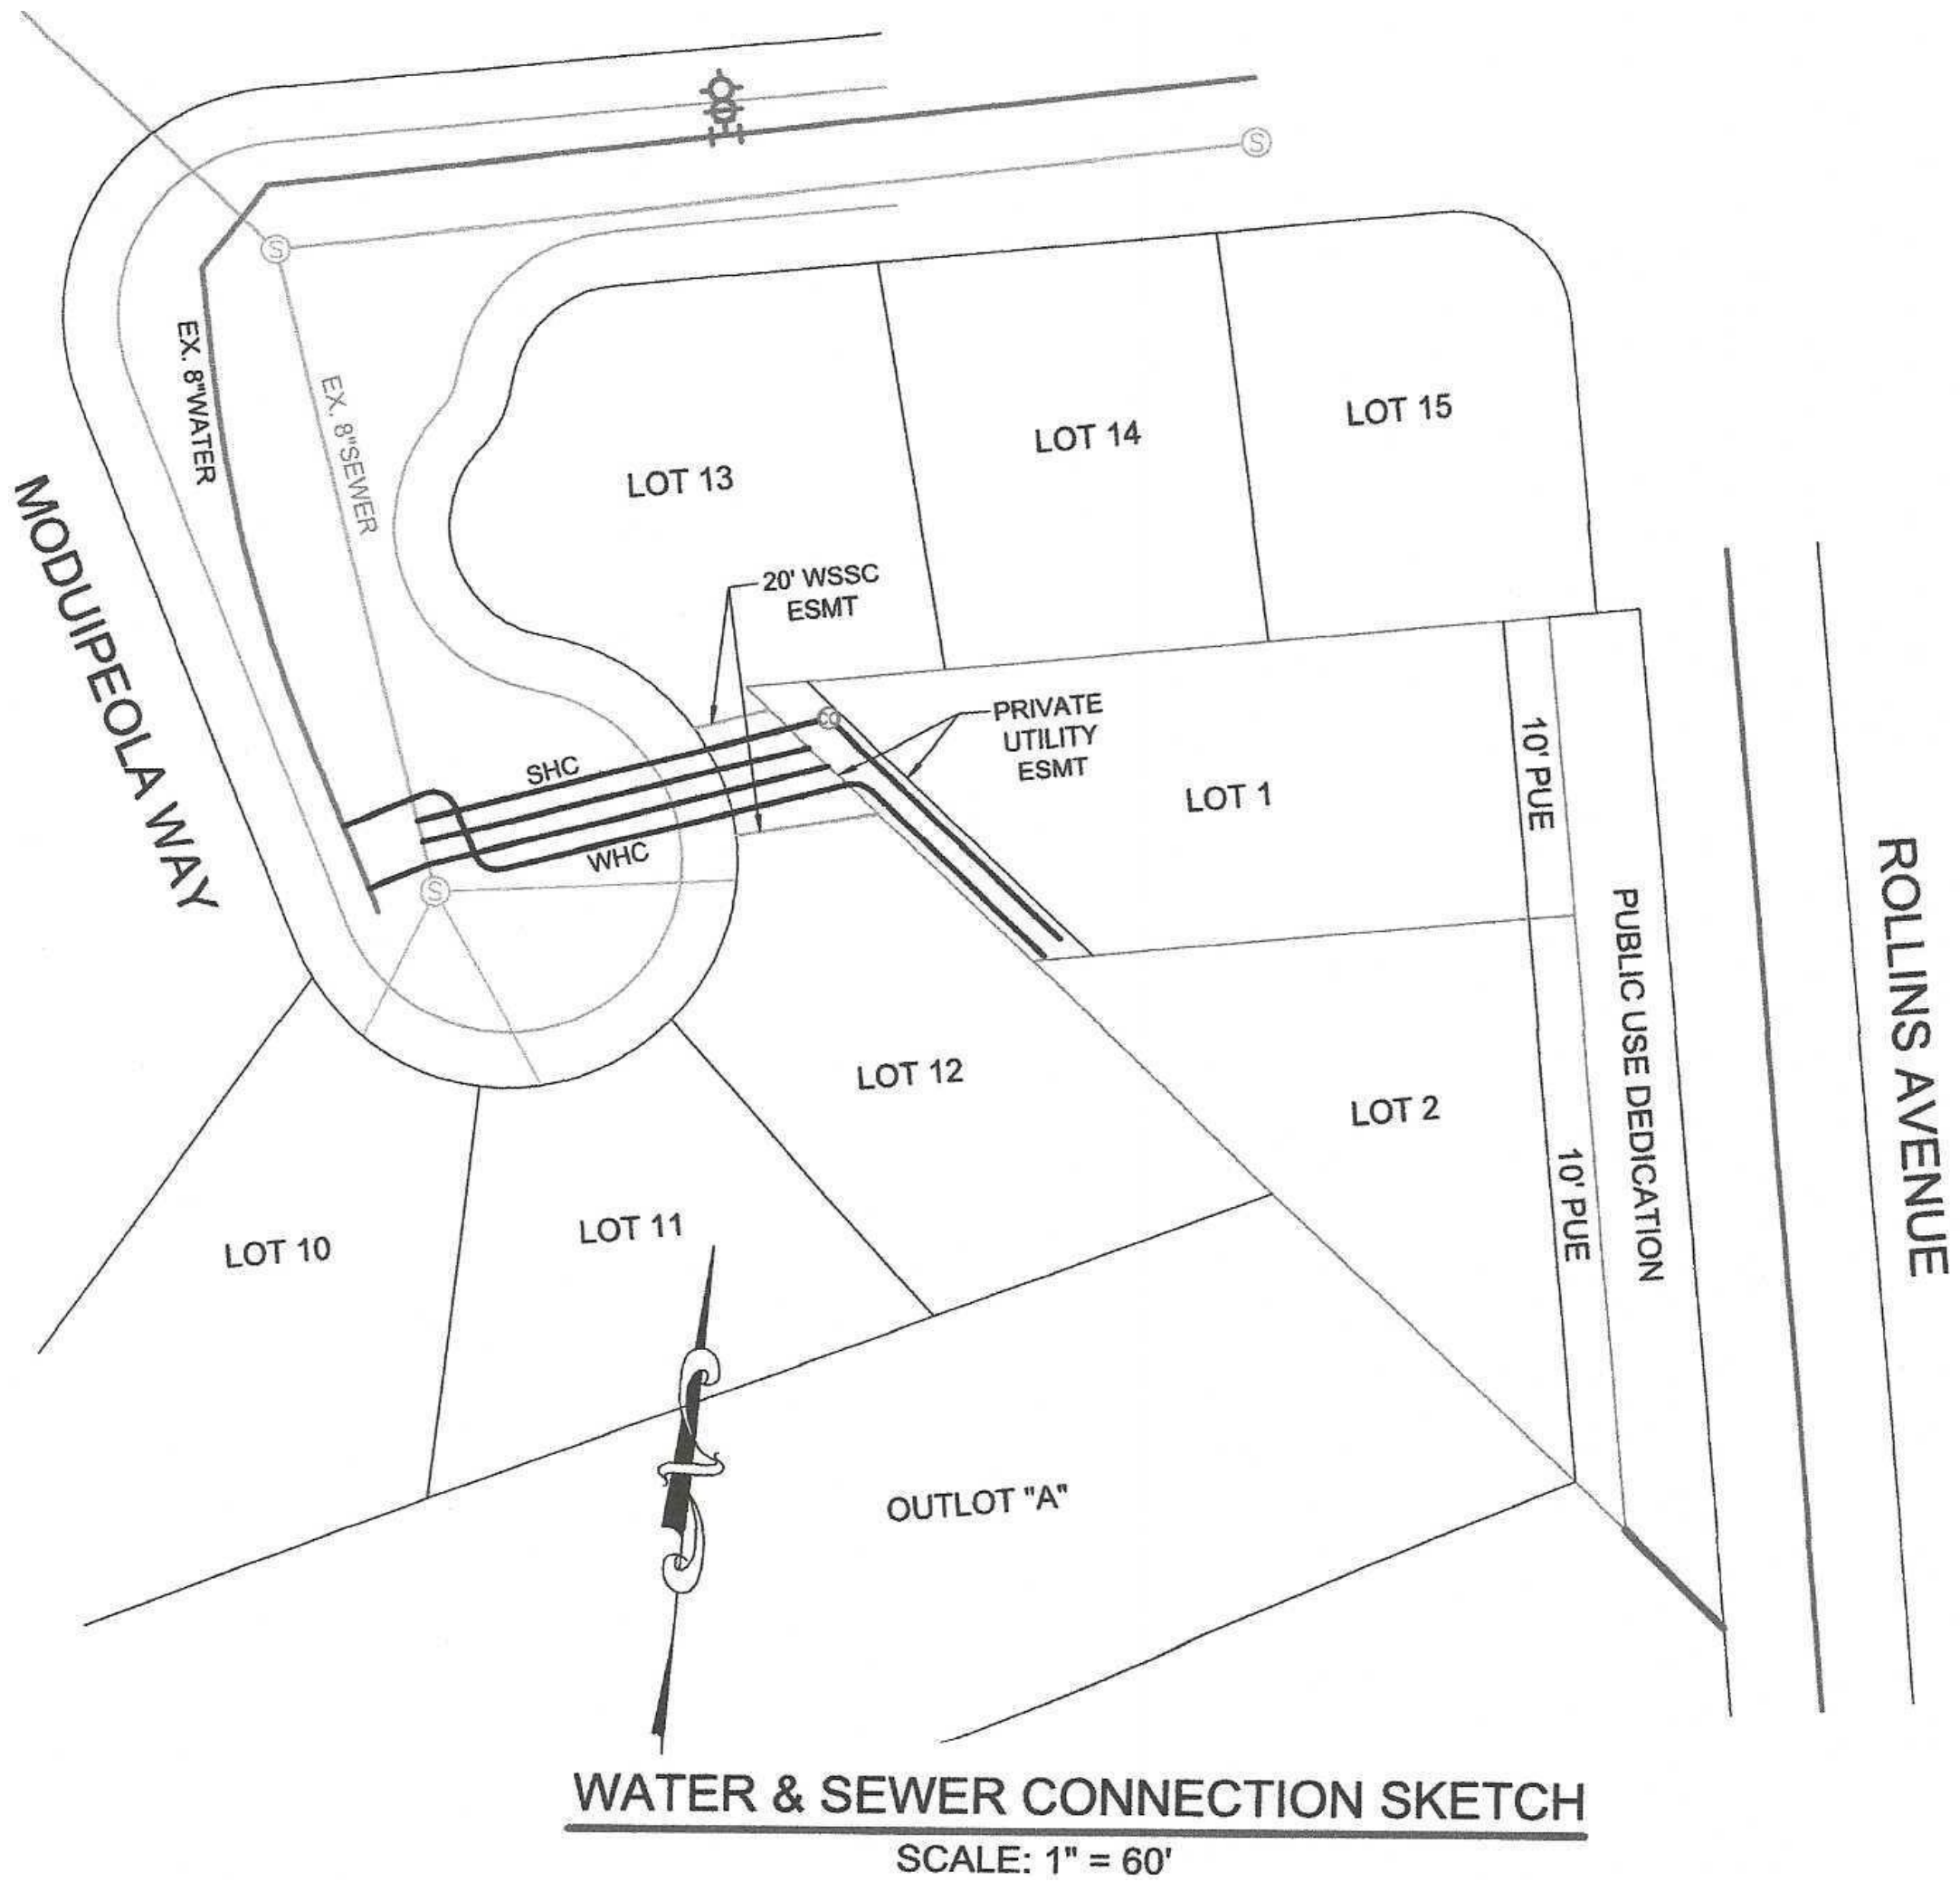

WATER AND SEWER CONNECTION SKETCH - SOURCE REFERENCE. Page 2 of the supplied WSSC connection document. See C-001 for the preliminary utility layout.

GENERAL COORDINATION: the recorded plat condition governs driveway arrangement. Separate aprons as drawn remain subject to DPW&T determination. The frontage walk must meet the applicable county standard or approved modification.