

KEALEE

Design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
1 OF 1
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY KEALEE SITE-PLAN ENGINE (AUTOMATED)
DESIGNED BY — (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)
CHECKED BY — (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	RSF-65
TAX / PARCEL ID	1009 Rollins Ave
GROSS LOT AREA	8,009 SF 0.184 AC
LOT FRONTAGE	45' MIN 134.65'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	30' 30'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	35% 14.91%
BUILDING FOOTPRINT	— 1,196 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 8,009 SF
- Area of dwelling 1,196 SF
- Wooded area NOT ESTABLISHED
- Foodplot area NOT ESTABLISHED
- Net tract area 8,009 SF
- TOTAL AREA DISTURBED 9,509 SF (at LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
1009 Rollins Ave	—	—	—	20'	—	2

G: garage slab; B: basement; FF: finished floor; SF: subfloor; HT: height; STY: storerooms. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 20.4% impervious	8,009	0.184	—
PRE-DEVELOPMENT	SF	—	C
Pervious — lawn / meadow	8,009	—	0.25
Composite C	—	—	0.250
POST-DEVELOPMENT	SF	—	C
Proposed roof	1,196	—	0.95
Driveway and on-lot paving	438	—	0.95
Pervious — lawn	6,375	—	0.25
Composite C	—	—	0.393
Flow path	194 ft	—	2.1 %
Time of concentration (Kirpich)	10.9 min	—	5.0 min
Rainfall intensity, 10-y	6.71 in/hr	—	0.31 cfs
Peak discharge PHE, Q = CIA	—	—	0.48 cfs
Peak discharge POST, Q = CIA	—	—	0.17 cfs
INCREASE TO BE MANAGED	—	—	0.2336
Rv = 0.05 + 0.009 I	—	—	156 cf

Water quality volume WQv
Time of concentration by Kirpich over a 194 ft flow path at 2.1%, taken from the 2 ft contours across the catchment. A 5-minute flow applies.
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2, Vol. 3, PEDES point estimates, 38.8752 N 76.9019 W.
Water quality volume on a 1.0 in rainfall. Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sewer, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — PORTER SUBDIVISION, PLAT BOOK PM 231 P50 — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED. EXISTING GRADE IS COUNTY LEAD CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.

LEGEND

- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — 2 FT INTERVAL, NAVD88
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT

PROFESSIONAL CERTIFICATION


I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

REVISIONS

— NONE —

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

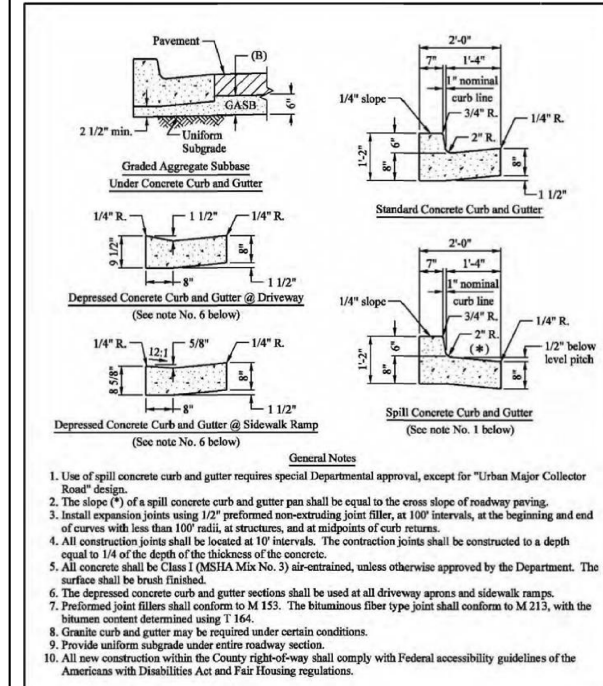


APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
		Prince George's County, MD
		Concrete Curb and Gutter
		300.01


Version: 03/19/12
Specification and Standards for Roadways and Bridges
Section B-11

REPRODUCED FROM THE PRINCE GEORGE'S COUNTY DPW&T STANDARD, THE STANDARD SPECIFICATIONS

GRAPHIC SCALE — 1" = 20'



CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

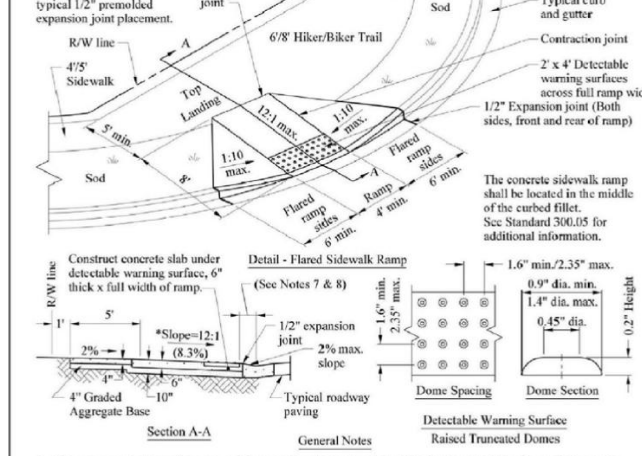

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
		Prince George's County, MD
		Concrete Sidewalk Ramp Type "A"
		300.07

Version: 03/19/12
Specification and Standards for Roadways and Bridges
Section B-11

REPRODUCED FROM THE PRINCE GEORGE'S COUNTY DPW&T STANDARD, THE STANDARD SPECIFICATIONS