

KEALEE

Design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
1 OF 1
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY KEALEE SITE-PLAN ENGINE (AUTOMATED)
DESIGNED BY — (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)
CHECKED BY — (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	RSF-65
TAX / PARCEL ID	—
GROSS LOT AREA	21,826 SF 0.501 AC
LOT FRONTAGE	45' MIN 65.00'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	30' 30'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	35% 5.9%
BUILDING FOOTPRINT	— 1,196 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

- Gross tract area 21,826 SF
- Area of dwelling 1,196 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net tract area 21,826 SF
- TOTAL AREA DISTURBED 7,295 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
1005 Rollins Ave	—	—	—	—	20'	2
1009 Rollins Ave	—	—	—	—	20'	2

G: garage slab - B: basement - FF: finished floor - SF: square feet - HT: height - STY: stories. A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
1005 Rollins Ave	9,599	0.220	—
PRE-DEVELOPMENT	—	—	—
Total — 17.0% impervious	9,599	0.220	—
PERVIOUS — lawn / meadow	—	—	0.25
Composite C	—	—	0.250
POST-DEVELOPMENT	—	—	—
Proposed roof	1,196	—	0.95
Driveway and on-lot paving	438	—	0.95
Pervious — lawn	7,965	—	0.25
Composite C	—	—	0.368
Flow path	204 ft	—	—
Flow path slope	2.0%	—	—
Time of concentration (Kirpich)	5.0 min	—	—
Rainfall intensity, 10-yr	6.71 in/hr	—	—
Peak discharge PRE, Q = CIA	0.37 cfs	—	—
Peak discharge POST, Q = CIA	0.55 cfs	—	—
INCREASE TO BE MANAGED	0.18 cfs	—	—
Rv = 0.05 + 0.009 I	0.2032	—	—
Water quality volume Wqy	163 cf	—	—

Time of concentration by Kirpich over a 204 ft flow path at 2.0%, taken from the 2 ft contours across the catchment. A 5-minute flow applies.
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.8752 N 76.9019 W.
Water quality volume on a 1.0 in rainfall. Maryland Stormwater Design Manual, Vol. 1 & II — WQy on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confine the lawn coefficient against the soil hydrology group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-108.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — PORTER SUBDIVISION, LOTS 1 AND 2 — PLAT BOOK PM 231, P. 50 (MSA, C281, 19850) SEAT PLEASANT (38TH ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND TAX MAP T3, GRID B3, 200 MAP 202 SE 36, ZONE R-45 AT RECORDING (RSF-65 UNDER THE 2022 REWRITE), SCALE 1" = 20', NOVEMBER 2007, M-NCPPC RECORD FILE 5-09121, BASIS OF BEARINGS: MARYLAND STATE PLANE COORDINATE SYSTEM (NAD 83, LOT 1 = 8,596 SQ FT (0.2262 AC), LOT 2 = 8,008 SQ FT (0.1838 AC), 4,219 SQ FT (0.0969 AC) DEDICATED TO PUBLIC USE. — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING INFILTRATION, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.

LEGEND

- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — 2' FT INTERVAL, NAVD83
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT

PROFESSIONAL CERTIFICATION


I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE

REVISIONS

— NONE —

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

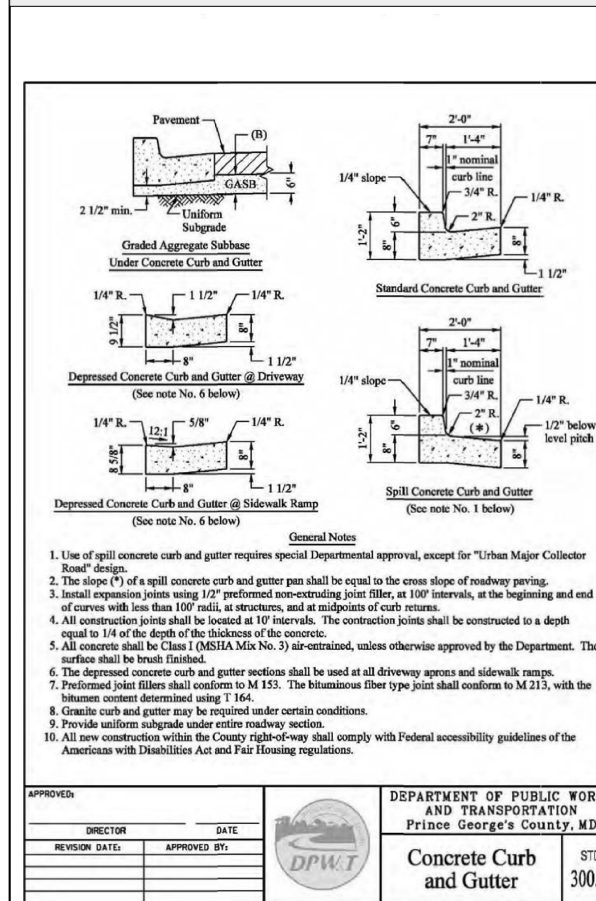


Version 03/19/12
Specification and Standards for Roadways and Bridges
Section B-11

REPRODUCED FROM THE PRINCE GEORGE'S COUNTY DPW&T STANDARD, THE STANDARD SPECIFICATIONS.

GRAPHIC SCALE — 1" = 20'

0 20 40 60 80 FEET

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

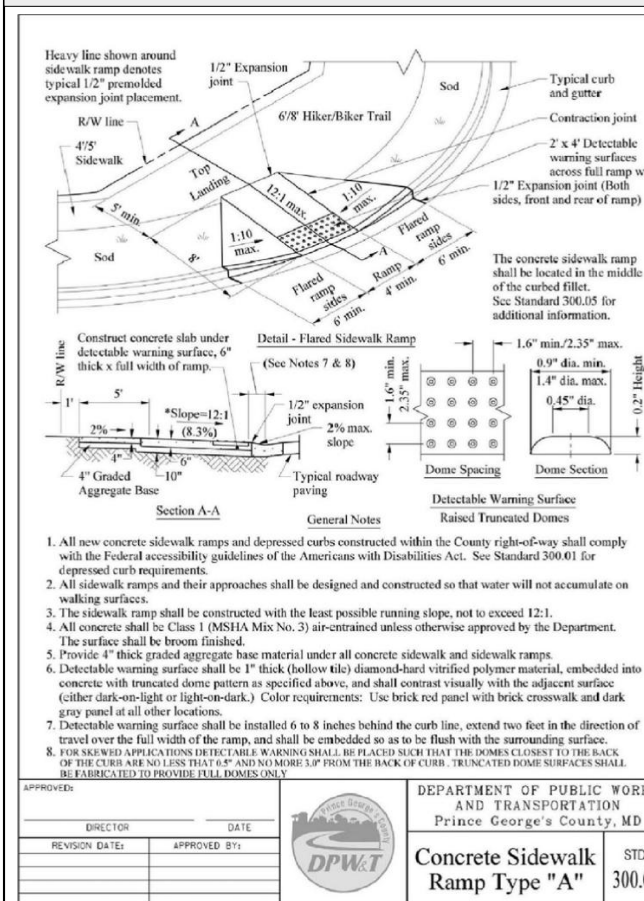

Version 03/19/12
Specification and Standards for Roadways and Bridges
Section B-11

REPRODUCED FROM THE PRINCE GEORGE'S COUNTY DPW&T STANDARD, THE STANDARD SPECIFICATIONS.

GRAPHIC SCALE — 1" = 20'

0 20 40 60 80 FEET