

KEALEE

Design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2
ADDRESS
1005 Rollins Ave
JURISDICTION
prince georges md
ZONE
RSF-65
SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
1 OF 1
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY KEALEE SITE PLAN ENGINE (AUTOMATED)
DESIGNED BY — (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)
CHECKED BY — (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	RSF-65
TAX / PARCEL ID	—
GROSS TRACT AREA	21,826 SF 0.501 AC
LOT 1 AREA	9,599 SF 0.220 AC
LOT 2 AREA	8,009 SF 0.184 AC
NET LOT AREA	17,607 SF 0.404 AC
LOT FRONTAGE	45' MIN 65.00' / 134.65'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	30' 30'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	35% 13.6%
BUILDING FOOTPRINT	— 2,392 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	21,826 SF
2. Area of dwelling	2,392 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	17,607 SF
6. TOTAL AREA DISTURBED	15,615 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
1005 Rollins Ave	—	—	—	—	20'	2
1009 Rollins Ave	—	—	—	—	20'	2

G: garage (slab) B: basement FF: finished floor SF: subfloor HT: height STY: stories A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQv CF
LOT 1	9,599	17.0%	0.37	0.55	0.18	163
LOT 2	8,009	20.4%	0.31	0.48	0.17	156
PROJECT TOTAL	17,607	18.9%	0.68	1.03	0.35	319

Peak flows are summed for catchments; Q in cfs. WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — PORTER SUBDIVISION, LOTS 1 AND 2 — PLAT BOOK PM 231, P. 50 (MSA, C238, 19050). SEAT PLEASANT (18TH) ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND, TAX MAP 13, GRID B3, 200 MAP 202 SE 06, ZONE R-55 AT RECORDING (RSF-65 UNDER THE 2022 REWRITE). SCALE 1" = 20', NOVEMBER 2007. M-NCPPC RECORD FILE 5-09121. BASIS OF BEARINGS: MARYLAND STATE PLANE COORDINATE SYSTEM (NAD 83). LOT 1 = 9,598 SQ FT (0.2203 ac); LOT 2 = 8,009 SQ FT (0.1838 ac); 4,219 SQ FT (0.0969 ac) DEDICATED TO PUBLIC USE. TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.

PLAT OF RECORD

- PORTER SUBDIVISION, LOTS 1 AND 2 — Plat Book PM 231, p. 50 (MSA, C238, 19050). SEAT PLEASANT (18th) Election District, Prince George's County, Maryland, Tax Map 13, Grid B3, 200 Map 202 SE 06, Zone R-55 at recording (RSF-65 under the 2022 rewrite). Scale 1" = 20', November 2007. M-NCPPC Record File 5-09121. Basis of bearings: Maryland State Plane Coordinate System (NAD 83). Lot 1 = 9,598 sq ft (0.2203 ac); Lot 2 = 8,009 sq. ft.
- NOTES OF RECORD
1. Development of this property shall be in accordance with the approved Stormwater Management Concept Plan 41230-2006-00, or any approved revisions thereafter.
 2. Approval of this plat is based upon a reasonable expectation that public water and sewer service will be available when needed, and is conditioned on fulfilling all of the Washington Suburban Sanitary Commission authorization DA 4916 Z 08 commitments.
 3. The applicant, his heirs, successors or assignees shall utilize an abutting driveway design, constructed per DPW&T standards and requirements. Separate, standard residential driveway aprons shall be provided along Rollins Avenue, if deemed appropriate by DPW&T upon the issuance of street.
 4. ADJOINING PROPERTIES, per the recorded plat, LOTS 13, 14 AND 15 (Addition to Pleasant Park, Plat Book VJ 185, Plat 76) — northeast; LOT 12 (Addition to Pleasant Park, Plat Book VJ 185, Plat 76) — southwest; OUTLOT 4 (Addition to Pleasant Park, Plat Book VJ 185, Plat 76) — northwest; JEAN M. ... PUE — Public Utility Easement · IFF — Iron Pipe Flow · For Public Wat...


The surveyor certifies, under declaration and approval signatures of the recorder, that the information shown on this plat is true and correct, and that the recorder has no knowledge of any fraud or illegality in the information shown on this plat.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

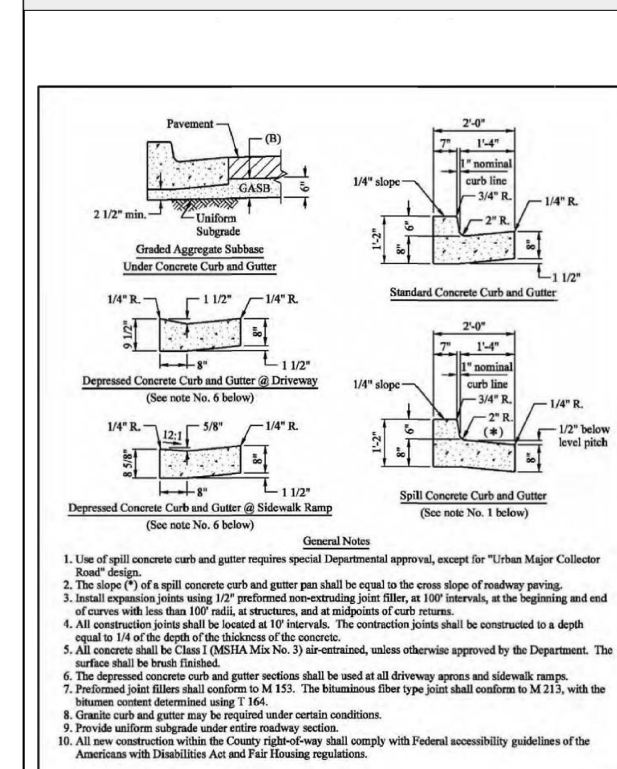

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
REVISIONS	DATE	CONCRETE CURB AND GUTTER
1	01/01/2021	300.01


Version 01/01/2021 Specification and Standards for Roadways and Bridges Section B - 61

REPRODUCED FROM THE PRINCE GEORGE'S COUNTY DPW&T STANDARD, THE STANDARD SPECIFICATIONS.

GRAPHIC SCALE — 1" = 20'

0 20 40 60 80 FEET

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

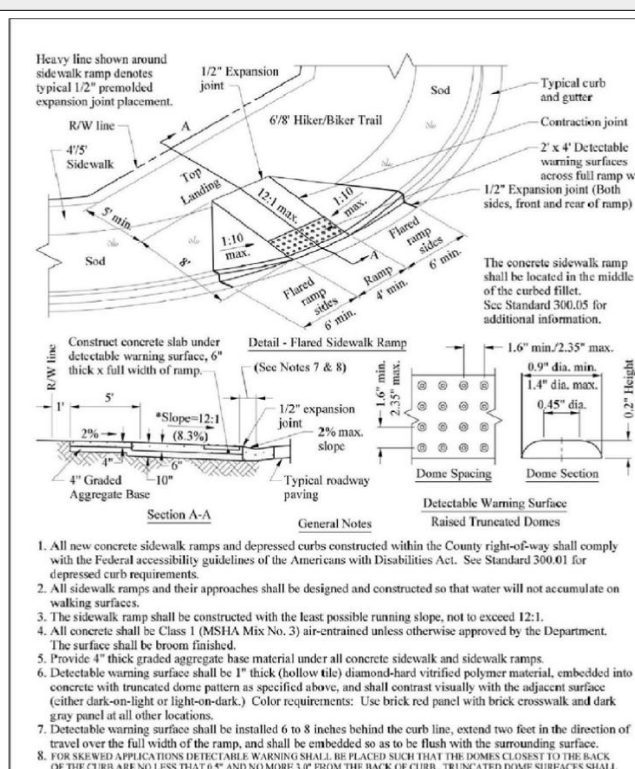

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
REVISIONS	DATE	CONCRETE SIDEWALK RAMP TYPE "A"
1	01/01/2021	300.07

Version 01/01/2021 Specification and Standards for Roadways and Bridges Section B - 61

REPRODUCED FROM THE PRINCE GEORGE'S COUNTY DPW&T STANDARD, THE STANDARD SPECIFICATIONS.