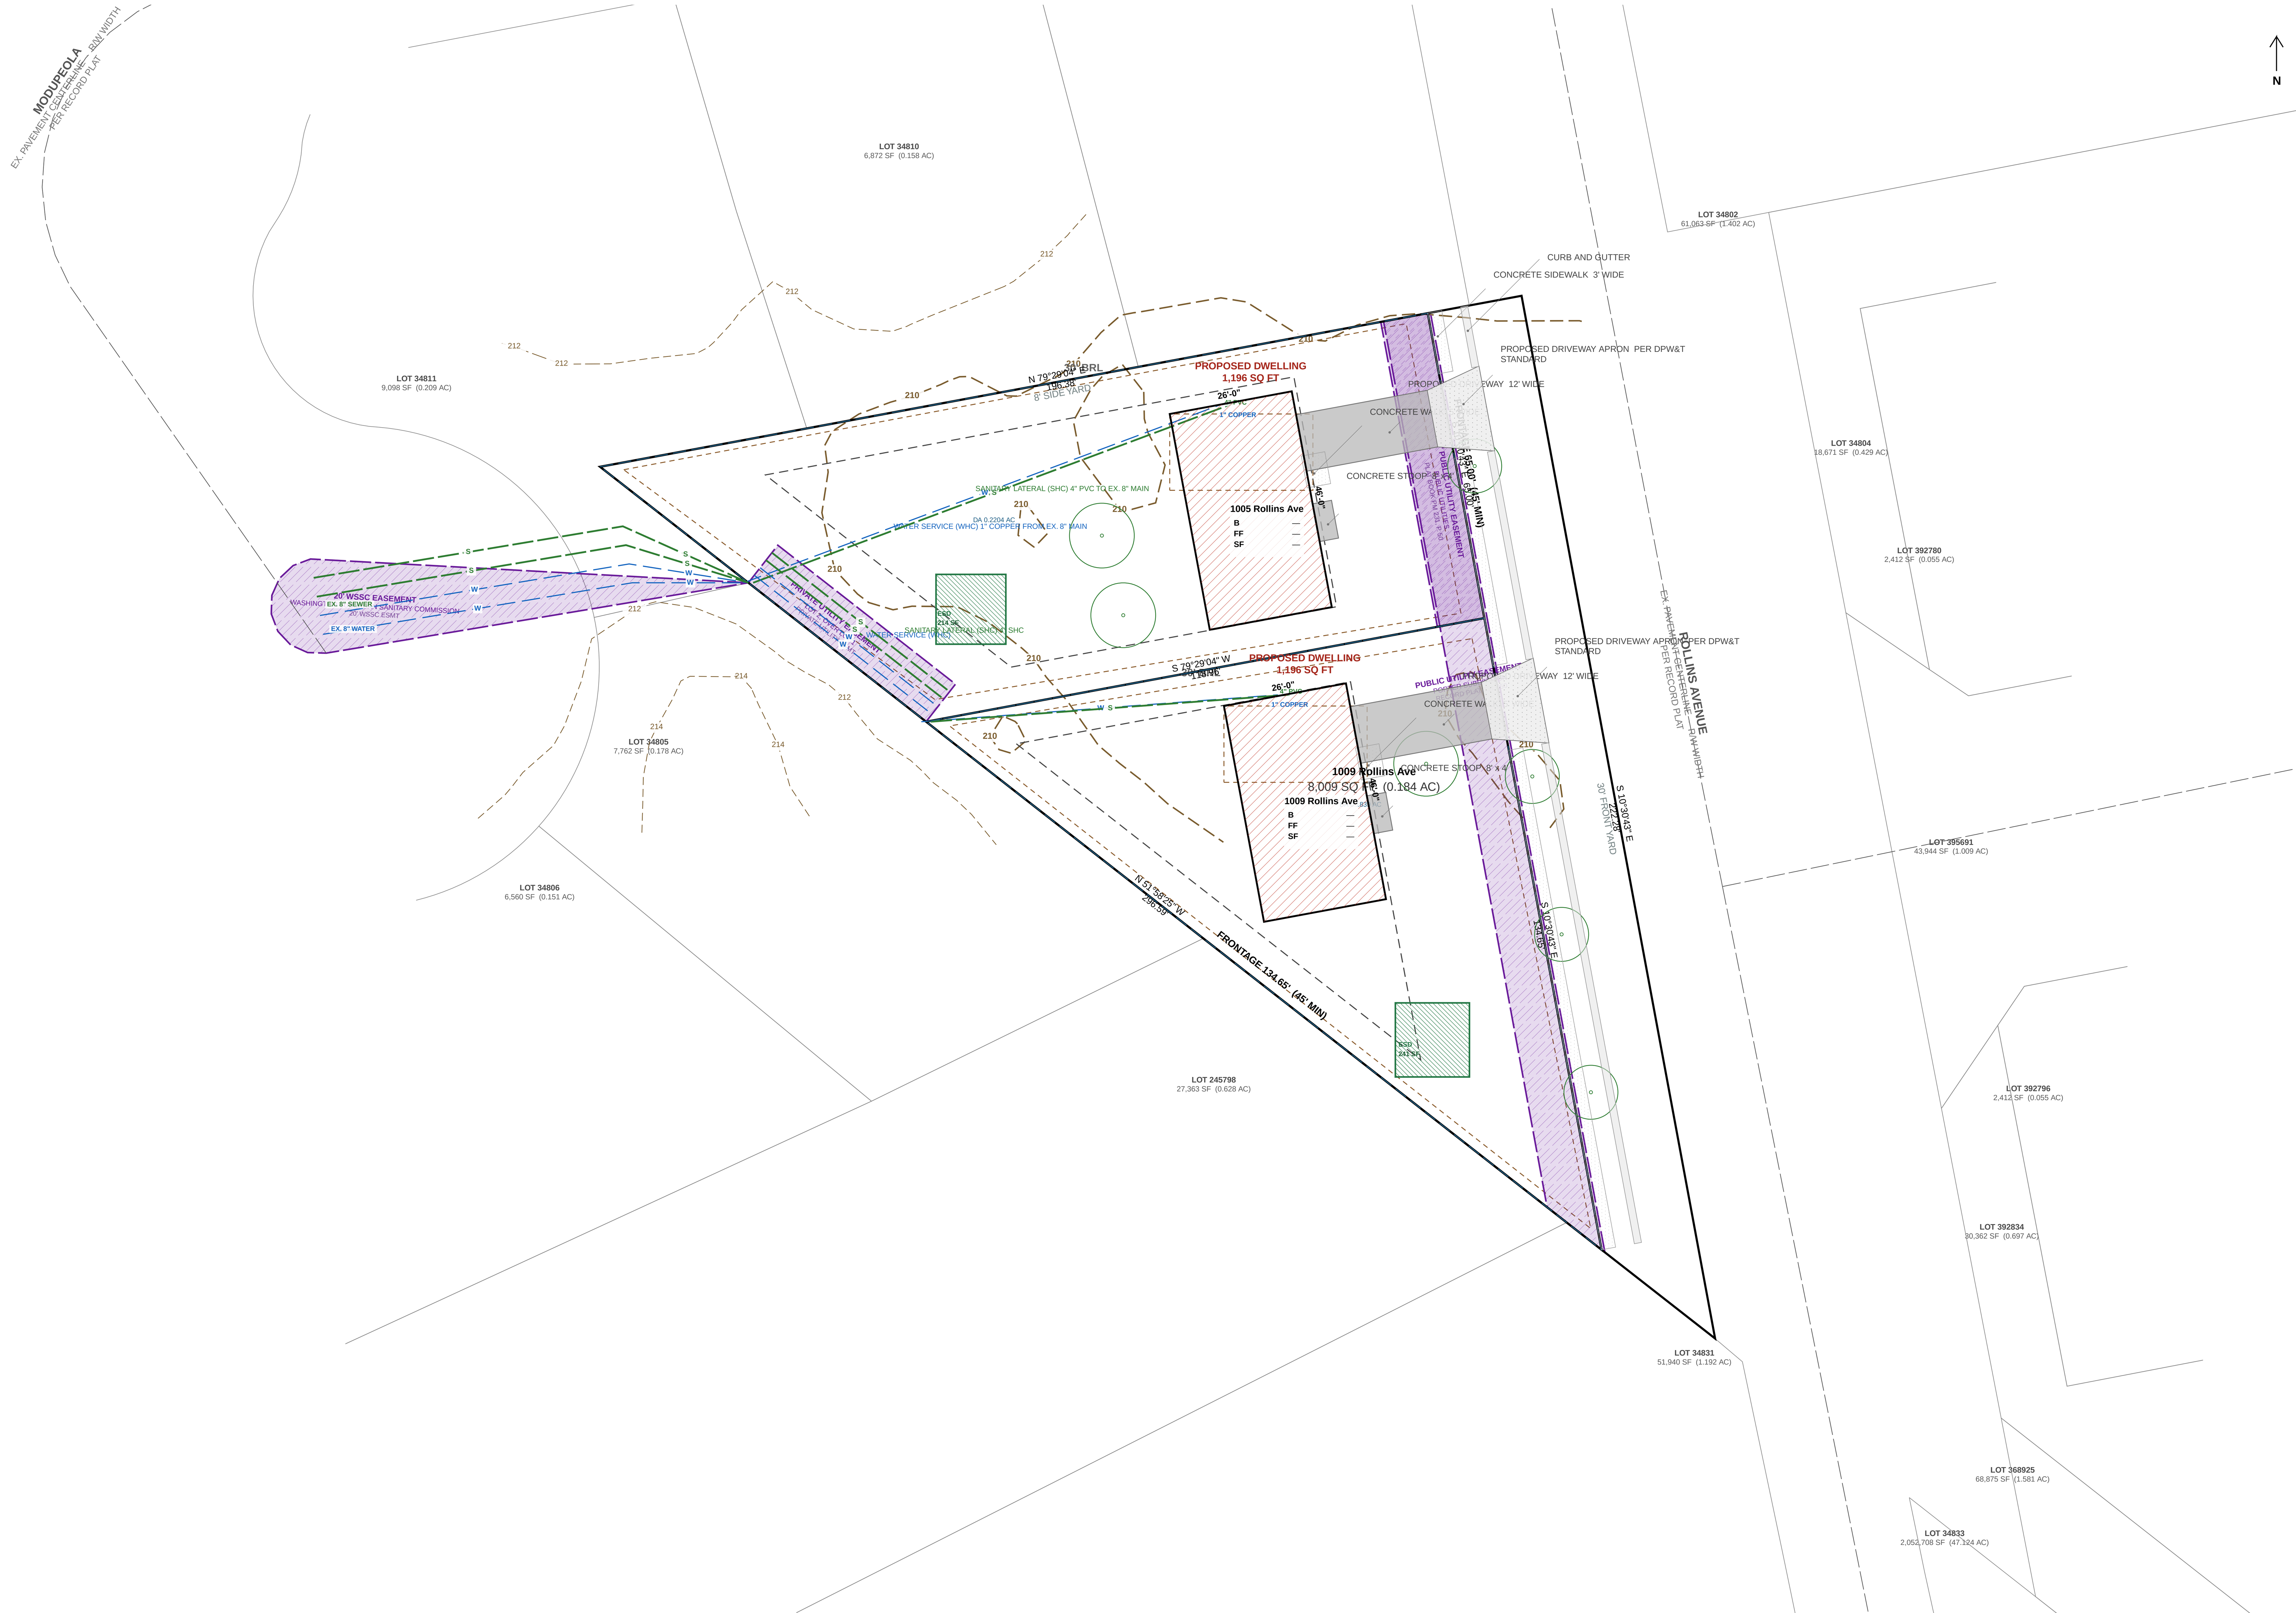


KEALEE

design, build, deliver

PROJECT
Porter Subdivision — LOT 1 & LOT 2

ADDRESS
1005 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape

SCALE
1" = 20'

STATUS
PRELIMINARY

SHEET NO.
1 OF 1

COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE	Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY	KEALEE SITE-PLAN ENGINE (AUTOMATED)
DESIGNED BY	— (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)
CHECKED BY	— (TO BE COMPLETED BY THE DESIGN PROFESSIONAL)

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	RSF-65	
TAX / PARCEL ID	—	
GROSS TRACT AREA	21,826 SF	0.501 AC
LOT 1 AREA	9,599 SF	0.220 AC
LOT 2 AREA	8,009 SF	0.184 AC
NET LOT AREA	17,607 SF	0.404 AC
LOT FRONTAGE	45' MIN	65.00' / 134.65'
SETBACKS	**REQUIRED**	**PROVIDED**
FRONT YARD	30'	30'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	**MAX**	**PROPOSED**
LOT COVERAGE	35%	13.6%
BUILDING FOOTPRINT	—	2,392 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD88 (feet)	

SITE ANALYSIS

1. Gross tract area	21,826 SF
2. Area of dwelling	2,392 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	17,607 SF
6. TOTAL AREA DISTURBED	16,789 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
1005 Rollins Ave	—	—	—	—	20'	2
1009 Rollins Ave	—	—	—	—	20'	2

G garage slab · B basement · FF finished floor · SF subfloor · HT height · STY storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQv CF
LOT 1	9,599	17.0%	0.37	0.55	0.18	163
LOT 2	8,009	20.4%	0.31	0.48	0.17	156
PROJECT TOTAL	**17,607**	**18.5%**	**0.68**	**1.03**	**0.35**	**319**

Peak flows are summed lot catchments; Q in cfs. WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	**1 DAY**
2. Obtain necessary permits	**2 DAYS**
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	**1 DAY**
4. Install stabilized construction entrance and perimeter sediment control	**2 DAYS**
5. Rough grade the lot	**5 DAYS**
6. Construct dwelling	**6 MONTHS**
7. Install water, sewer and storm services and the driveway	**10 DAYS**
8. Fine grade and stabilize all disturbed areas	**5 DAYS**
9. Remove sediment control once the inspector gives written permission	**1 DAY**

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — PORTER SUBDIVISION, LOTS 1 AND 2 — PLAT BOOK PM 231, P. 50 (MSA_C2381_19050). SEAT PLEASANT (18TH) ELECTION DISTRICT, PRINCE GEORGE'S COUNTY, MARYLAND. TAX MAP 73, GRID B3; 200 MAP 202 SE 06. ZONE R-55 AT RECORDING (RSF-65 UNDER THE 2022 REWRITE). SCALE 1" = 20', NOVEMBER 2007. M-NCPPC RECORD FILE 5-09121. BASIS OF BEARINGS: MARYLAND STATE PLANE COORDINATE SYSTEM (NAD 83). LOT 1 = 9,598 SQ FT (0.2203 AC); LOT 2 = 8,008 SQ FT (0.1838 AC); 4,219 SQ FT (0.0969 AC) DEDICATED TO PUBLIC USE. — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.

LEGEND


- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — 2 FT INTERVAL, NAVD88
- STREET CENTRELINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT
- SANITARY LATERAL (SHC) — HEAVIEST
- WATER SERVICE (WHC)
- STORM DRAIN — FINEST
- ESD — STORMWATER PRACTICE

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

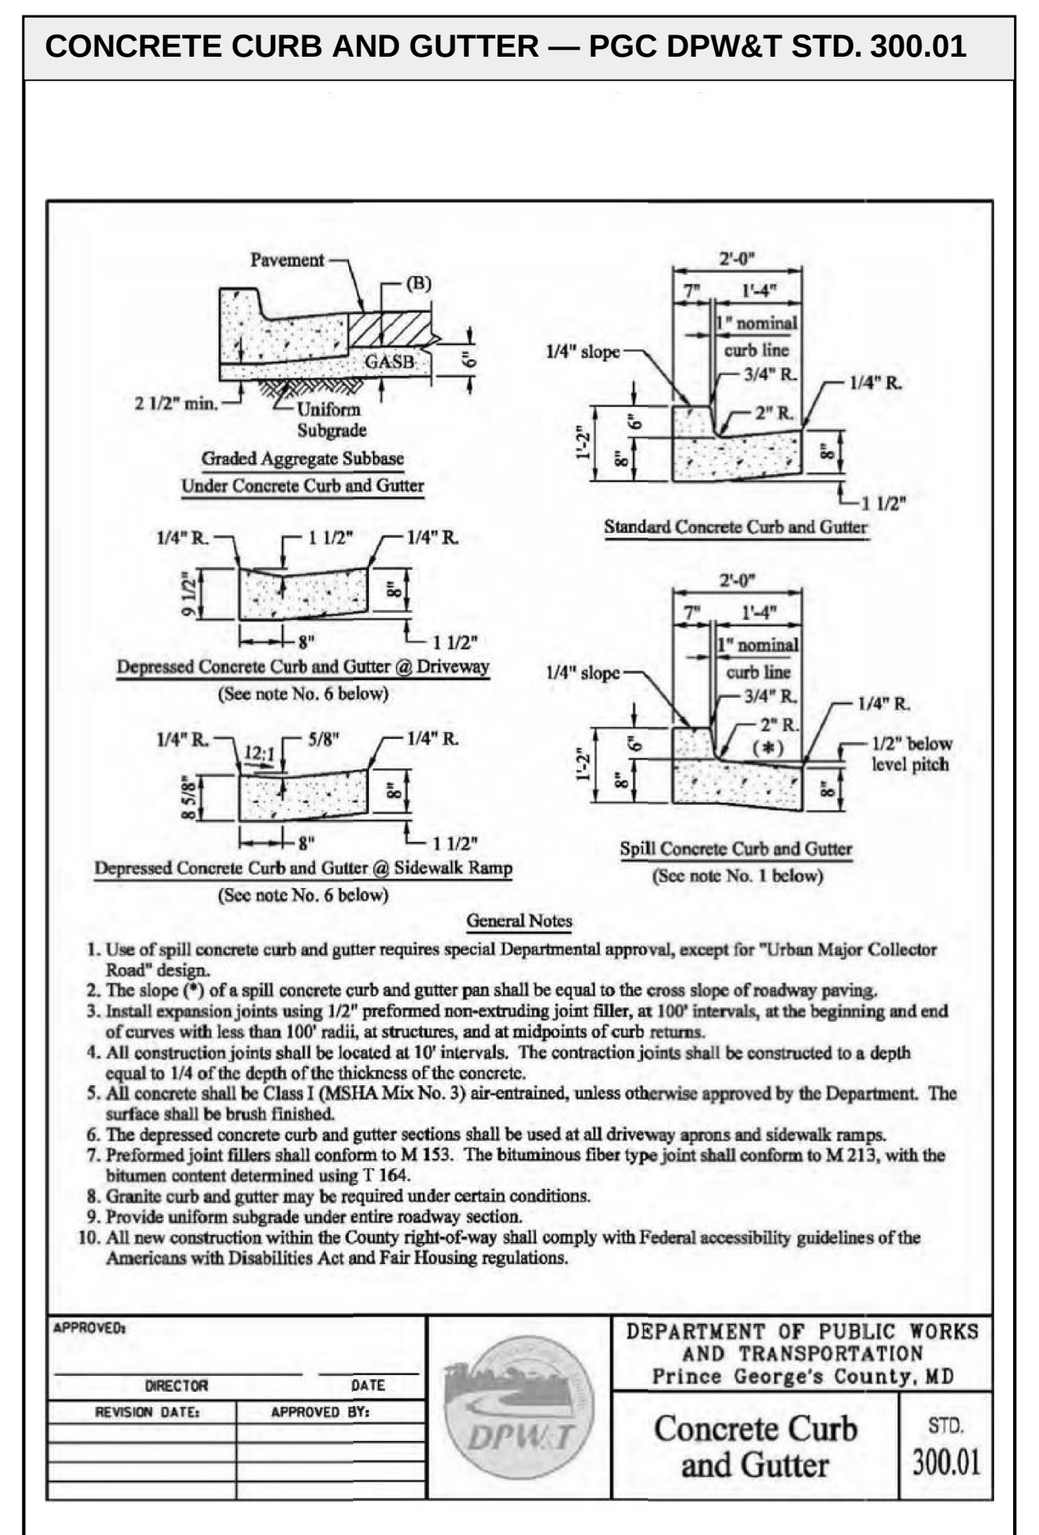


REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

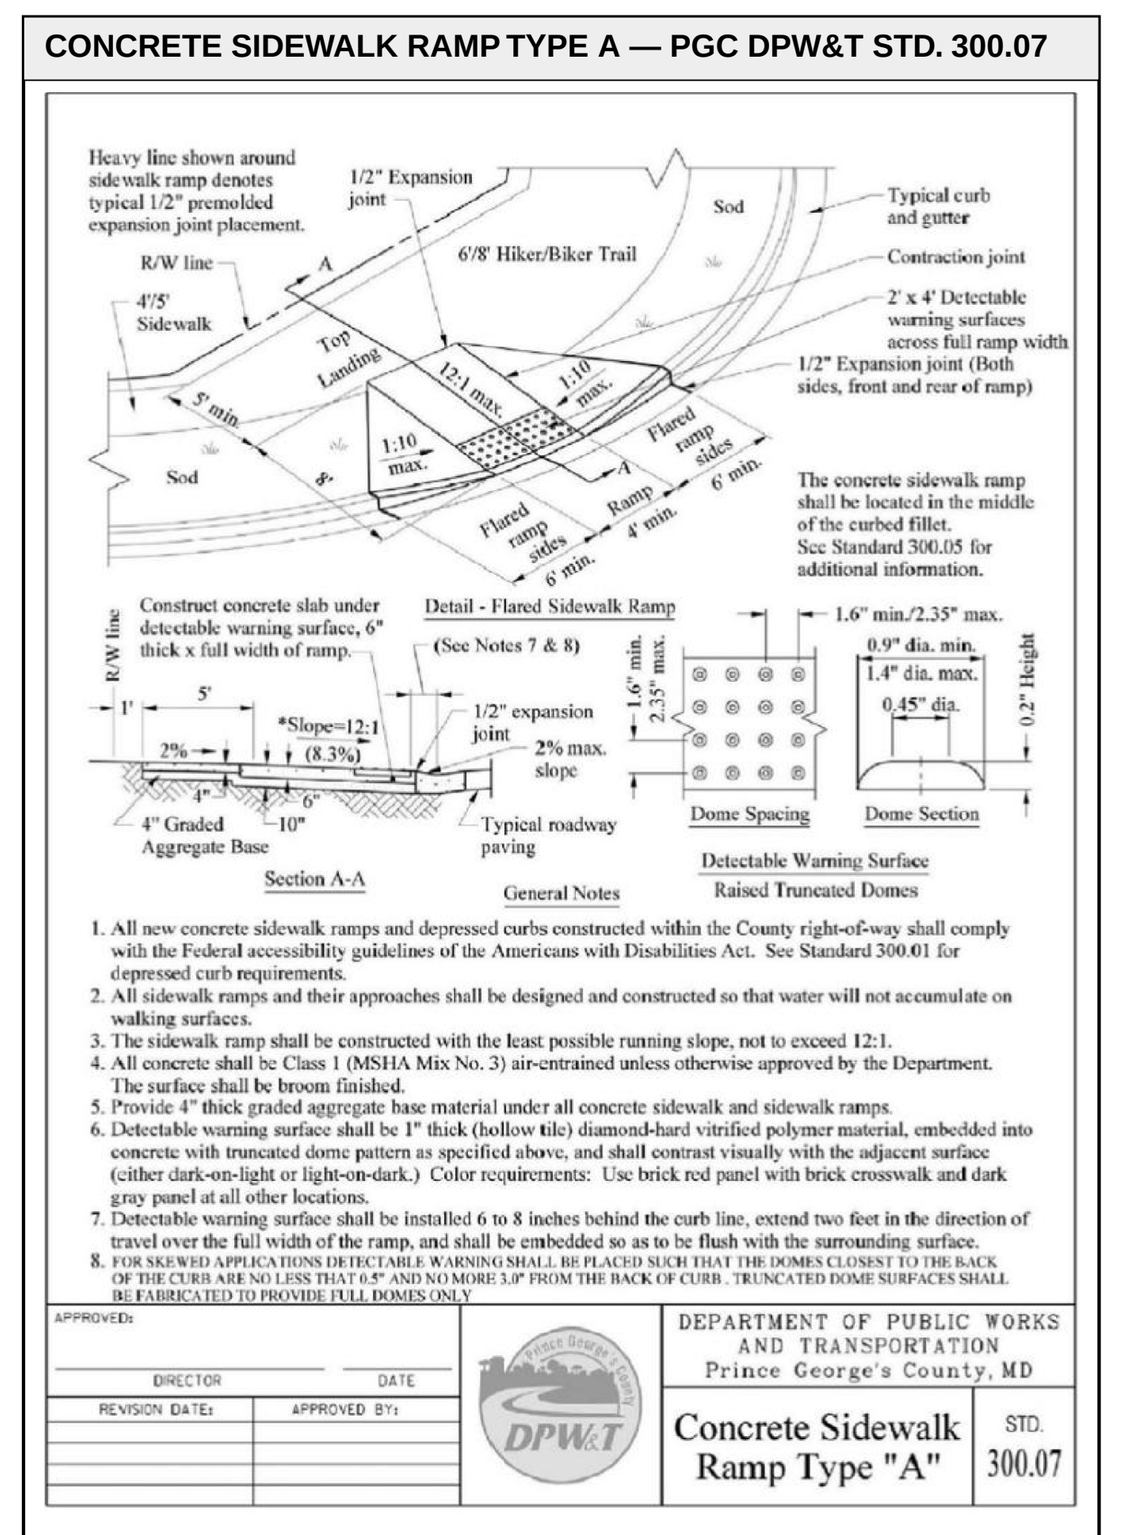

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

WATER & SEWER CONNECTION SKETCH — RECORDED — SCALE 1" = 60'

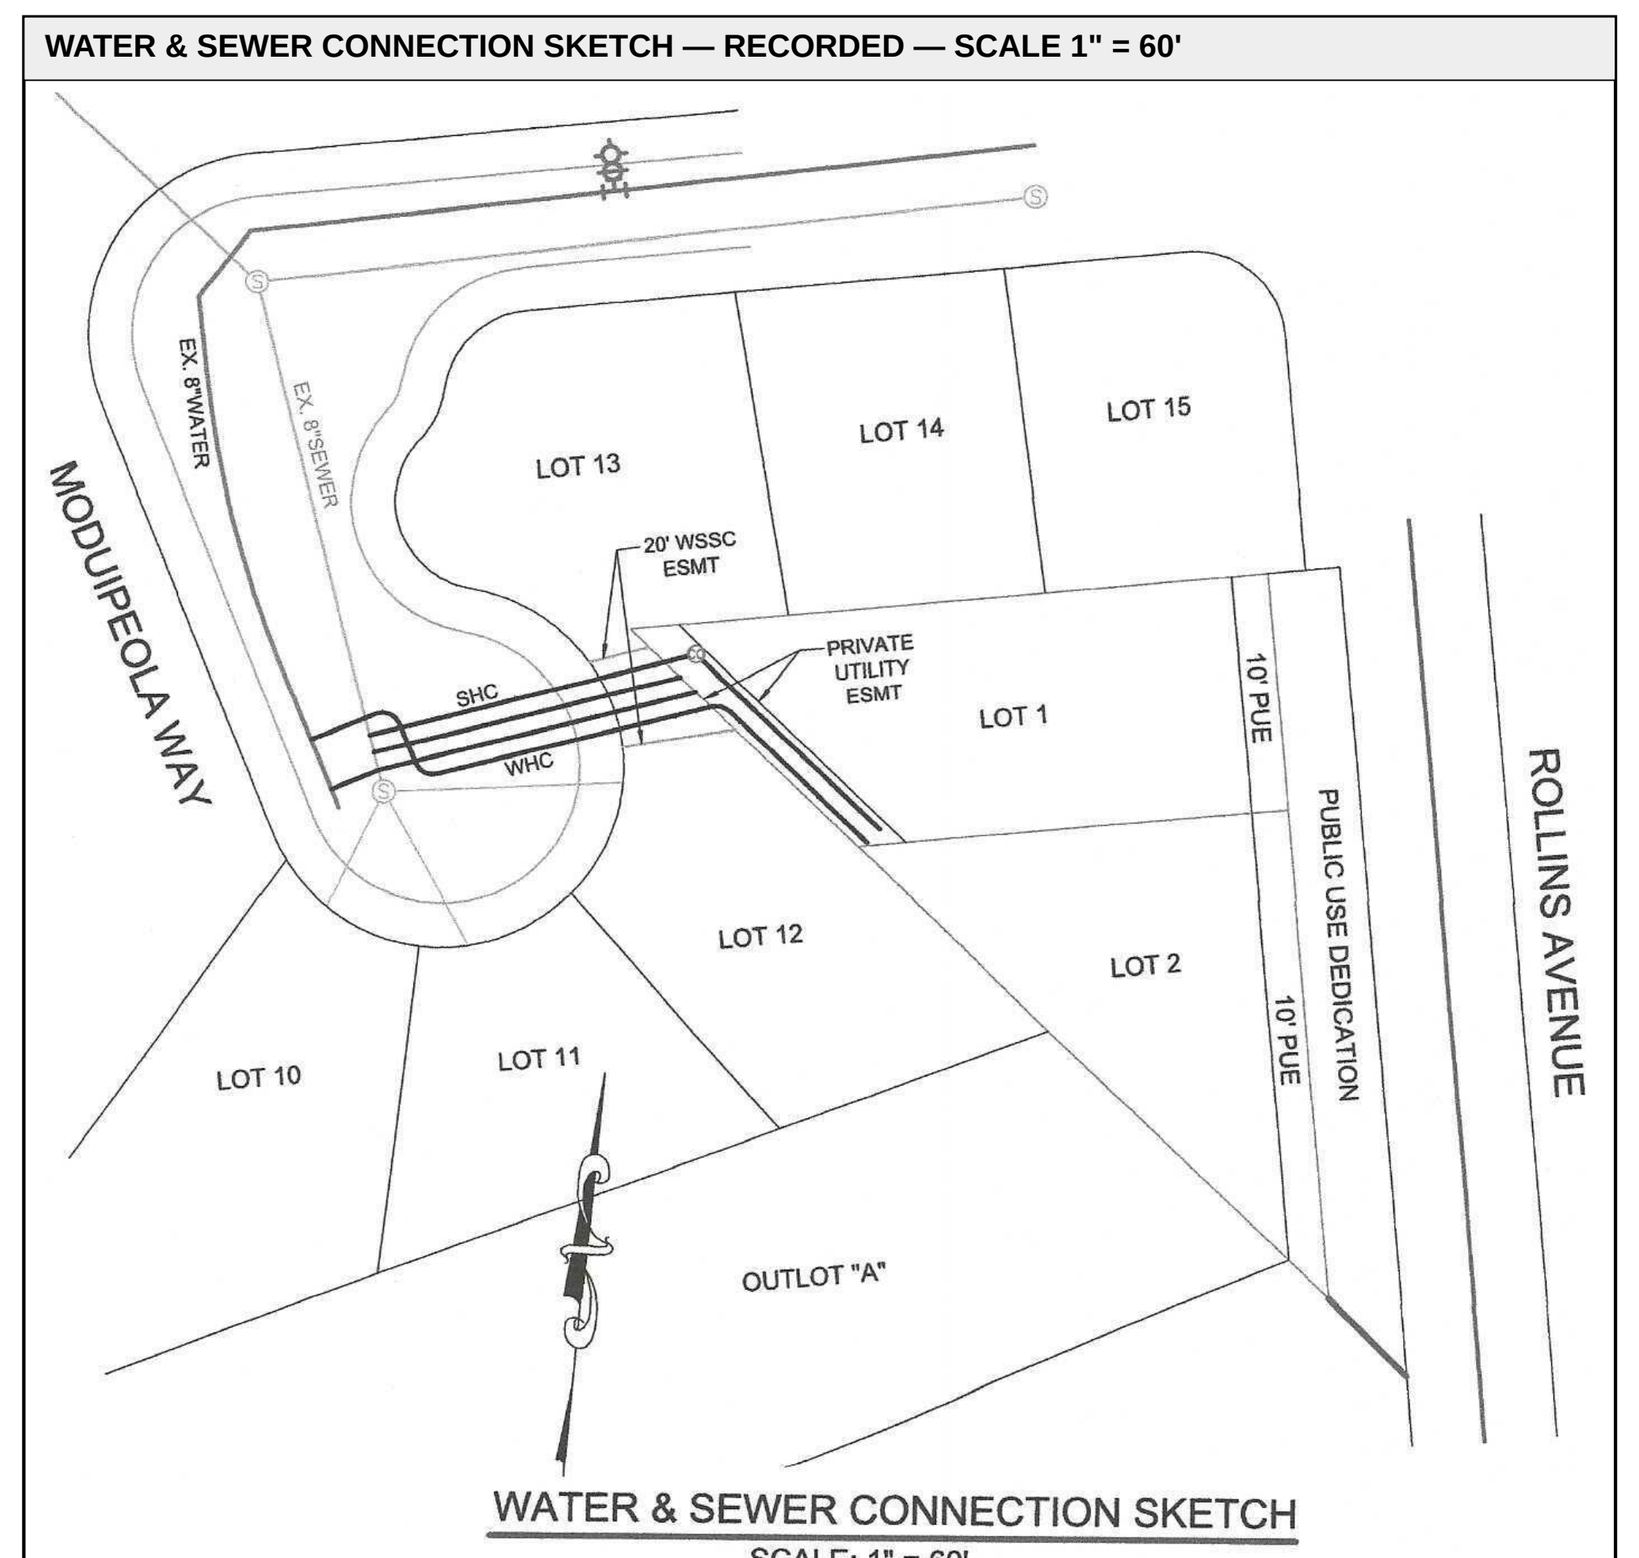

REPRODUCED FROM THE RECORDED SKETCH. THE RECORDED DOCUMENT GOVERNS.

GRAPHIC SCALE — 1" = 20'

0 20 40 60 80 FEET

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE ______ DATE ______

LICENSE NO. ______ EXPIRATION DATE ______

SEAL

REVISIONS
— none —