



KEALEE

Design, build, deliver

PROJECT
7300 BALTIMORE AVENUE
ADDRESS
7300 BALTIMORE AVENUE
JURISDICTION
Prince George's County, Maryland
ZONE
LTO-E
SHEET
C-200 — Overall Site and Zoning Plan
SCALE
1" = 50'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Maryland Professional Engineer
certifies: site_layout

SEAL AND SIGNATURE

Architect
certifies: architectural_footprint

SEAL AND SIGNATURE

This sheet carries content from more than one professional discipline. Each seal below applies only to the subjects listed beside it. No professional certifies content outside their stated scope, and the sheet is not divided into separate drawings for that purpose.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-200 — Overall Site and Zoning Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	LTO-E
TAX / PARCEL ID	156835
GROSS TRACT AREA	153,054 SF 3.514 AC
LOT FRONTAGE	394.96'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	0' 0'
SIDE YARD	0' 0'
REAR YARD	0' 0'
COVERAGE	MAX PROPOSED
LOT COVERAGE	0.8%
BUILDING FOOTPRINT	1,200 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 153,054 SF
- Area of dwelling 1,200 SF
- Wooded area NOT ESTABLISHED
- Floodplain area 153,054 SF
- Net lot area 153,054 SF
- TOTAL AREA DISTURBED 18,781 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-17(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
7300 BALTIMORE	—	—	—	—	20'	2

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 0.2% impervious	153,054	3.514	
PRE-DEVELOPMENT	SF		C
PerVIOUS — lawn / meadow	153,054		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-street paving			0.95
PerVIOUS — lawn	151,677		0.256
Flow path			686 ft
Flow path slope			3.2 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.65 in/hr
Peak discharge PHE, Q = CIA			5.84 cfs
Peak discharge POST, Q = CIA			5.98 cfs
INCREASE TO BE MANAGED			0.14 cfs
Rv = 0.05 + 0.0081			0.0881
Water quality volume WQv			741 cf

Time of concentration by Kirpich over a 686 ft flow path at 3.2%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.65 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 ver. 3. PFDS point estimate, 38 9800 N 75 9384 W.
Water quality volume on a 1.0 in rainfall. Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

LEGEND

- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — 2 FT INTERVAL, NAVD88
- PROPOSED CONTOUR — 2 FT INTERVAL
- STREET CENTERLINE
- PROPOSED PAVEMENT — DRIVEWAY / WALK
- EASEMENT
- SANITARY LATERAL (SHC) — HEAVIEST
- WATER SERVICE (WNC)
- STORM DRAIN — TRUNK, RCP
- STORM — HOUSE CONNECTION TO TRUNK
- DRAINAGE SWALE — INVERT AND GRADED SECTION
- RETAINING WALL — TICKS ON THE RETAINED SIDE
- LIMIT OF GROUND COVER — TICKS ON THE STEEP SIDE
- ESD — STORMWATER PRACTICE

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


REVISIONS

— NONE —

SOILS STABLE USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

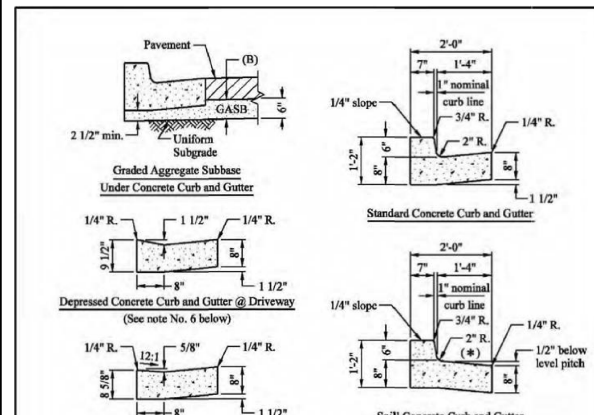


- General Notes
- Use of gullies, concrete curb and gutter requires special Department approval, except for "Chain Major Collector Road" design.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.
 - The crown of a gully must be at least 1/2" above the gutter, and the gutter must be at least 1/2" above the curb.

APPROVED	DATE
DESIGNED	DATE
CHECKED	DATE
CONCRETE CURB AND GUTTER	DATE

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

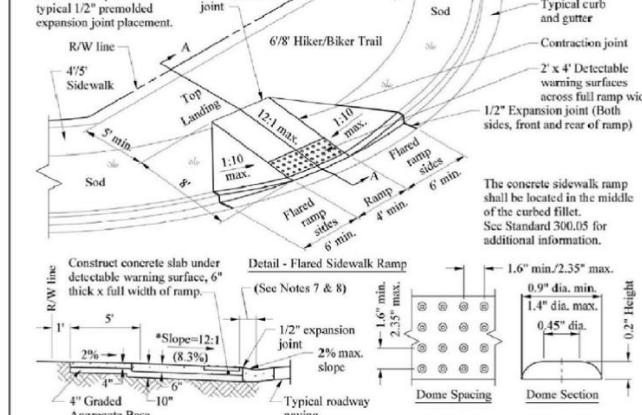

- General Notes
- All new concrete sidewalk ramps and depressed curbs constructed within the County right-of-way shall comply with the Federal accessibility guidelines of the Americans with Disabilities Act. See Standard 300.01 for additional requirements.
 - All sidewalk ramps and curb extensions shall be designed and constructed so that water will not accumulate on the sidewalk.
 - The sidewalk ramp shall be constructed with the base material having a slope, and to exceed 1/2".
 - All concrete shall be Class 1 (MSHA No. 1) or equivalent concrete as specified by the Department.
 - The surface shall be broom finish.
 - Concrete of thick, rigid strength 10,000 psi shall be used for all concrete sidewalk ramps, curb extensions, and depressed curbs.
 - The finished surface shall be finished to a 1/8" tolerance for the curb face, and to a 1/4" tolerance for the sidewalk surface.
 - Concrete sidewalk ramps shall be installed in a 4' width, and the curb face, extend two feet to the direction of travel.
 - Concrete sidewalk ramps shall be installed in a 4' width, and the curb face, extend two feet to the direction of travel.
 - Concrete sidewalk ramps shall be installed in a 4' width, and the curb face, extend two feet to the direction of travel.

APPROVED	DATE
DESIGNED	DATE
CHECKED	DATE
CONCRETE SIDEWALK RAMP TYPE A	DATE

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.

GRAPHIC SCALE — 1" = 50'

0 50 100 150 200 FEET



KEALEE

Design, build, deliver

PROJECT
7300 BALTIMORE AVENUE
ADDRESS
7300 BALTIMORE AVENUE
JURISDICTION
Prince George's County, Maryland
ZONE
LTO-E
SHEET
C-500 — Utility Plan
SCALE
1" = 50'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)
PROFESSIONAL RESPONSIBILITY
Maryland Professional Engineer
certifies: Utility_Design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANT TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-500 — Utility Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	LTO-E
TAX / PARCEL ID	156835
GROSS TRACT AREA	153,054 SF 3.514 AC
LOT FRONTAGE	— 394.96'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	0' 0'
SIDE YARD	0' 0'
REAR YARD	0' 0'
COVERAGE	MAX PROPOSED
LOT COVERAGE	— 0.8%
BUILDING FOOTPRINT	— 1,200 SF
DATUM	YES — DISTURBANCE
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	153,054 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	153,054 SF
6. TOTAL AREA DISTURBED	18,781 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
7300 BALTIMORE	—	—	—	—	20'	2

AVENUE
C: Curb; Sub: Basement; FF: Finished floor; SF: Subfloor; HT: Height; STY: Storeys. A DASH IS NOT ZERO. The elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 0.9% impervious	153,054	3.514	—
PRE-DEVELOPMENT	SF	—	C
PerVIOUS — lawn / meadow	153,054	—	0.25
Composite C	—	—	0.250
POST-DEVELOPMENT	SF	—	C
Proposed roof	1,200	—	0.95
Driveway and on-lot paving	177	—	0.95
PerVIOUS — lawn	151,677	—	0.25
Composite C	—	—	0.256
Flow path	686 ft	—	—
Flow path slope	3.2 %	—	—
Time of concentration (Kirpich)	5.0 min	—	—
Rainfall intensity, 10-yr	6.65 in/hr	—	—
Peak discharge PRE, Q = CIA	5.84 cfs	—	—
Peak discharge POST, Q = CIA	5.98 cfs	—	—
INCREASE TO BE MANAGED	0.14 cfs	—	—
Rv = 0.05 + 0.0091	0.0881	—	—
Water quality volume Wqv	741 cf	—	—

Time of concentration by Kirpich over a 686 ft flow path at 3.2%, taken from the 2 ft contours across the catchment. A 5-minute flow applies.
Rainfall intensity 6.65 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2, Ver. 3. PFDS point estimate, 38 9800 N 76 9384 W.
Water quality volume on a 1.0 in rainfall. Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting 1 DAY
2. Obtain necessary permits 2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
4. Install stabilized construction entrance and perimeter sediment control 2 DAYS
5. Rough grade the lot 5 DAYS
6. Construct dwelling 6 MONTHS
7. Install water, sewer and storm services and the driveway 10 DAYS
8. Fine grade and stabilize all disturbed areas 5 DAYS
9. Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION. NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER DPW&T STD. 300.01, NOTE 6. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

REVISIONS

— NONE —

SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASB	Adelphi silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphi-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphi-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphi-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphi-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

Diagram showing cross-sections of concrete curb and gutter types (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z) with dimensions and materials. Includes a table of materials and a table of dimensions.

Material	Quantity	Unit
Concrete	1.00	cu yd
Gravel	1.00	cu yd
Asphalt	1.00	sq yd

DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
Prince George's County, MD
Concrete Curb and Gutter
PGC DPW&T STD. 300.01
Revised 10/15/12
Reproduced from the PGC DPW&T STANDARD THE STANDARD GOVERNS.

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

Diagram showing cross-sections of concrete sidewalk ramp type A with dimensions and materials. Includes a table of materials and a table of dimensions.

Material	Quantity	Unit
Concrete	1.00	cu yd
Gravel	1.00	cu yd
Asphalt	1.00	sq yd

DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
Prince George's County, MD
Concrete Sidewalk Ramp Type "A"
PGC DPW&T STD. 300.07
Revised 10/15/12
Reproduced from the PGC DPW&T STANDARD THE STANDARD GOVERNS.

