



KEALEE

Design, build, deliver

PROJECT
3400 BARKLEY DR, FAIRFAX, VA, 22031
ADDRESS
3400 BARKLEY DR, FAIRFAX, VA, 22031
JURISDICTION
Fairfax County, Virginia
ZONE
R-1
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
1 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Virginia Licensed Surveyor
certifies: boundary_determination, topographic_survey

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-100 — Existing Conditions and Boundary Plan
DISCIPLINE	Virginia Licensed Surveyor
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-1
TAX / PARCEL ID	0582 04 0006
GROSS TRACT AREA	37,710 SF 0.866 AC
LOT FRONTAGE	— 128.56'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	40' 40'
SIDE YARD	20' 20'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	— 3.2%
BUILDING FOOTPRINT	— 1,200 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	37,710 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	37,710 SF
6. TOTAL AREA DISTURBED	12,086 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH FAIRFAX COUNTY LDS

BUILDING DATA

	G	B	FF	SF	HT	STY
3400 BARKLEY DR, FAIRFAX, VA, 22031	—	—	—	—	20'	2

Legend: G: ground floor; B: basement; FF: finished floor; SF: subfloor; HT: height; STY: storeys. A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 5.0% Impervious	37,710	0.866	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	37,710		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-lot paving	886		0.95
Pervious — lawn	35,824		0.25
Composite C			0.285
Flow path			310 ft
Flow path slope			5.8 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.82 in/hr
Peak discharge PRE, Q = CIA			1.48 cfs
Peak discharge POST, Q = CIA			1.68 cfs
INCREASE TO BE MANAGED			0.20 cfs
Rv = 0.05 + 0.0091			0.0950
Water quality volume WQv			299 cf

Time of concentration by Kirpich over a 310 ft flow path at 5.8%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.82 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2, Ver. 3, PFDS point estimate, 38,859 ft 77,258 ft W.
Water quality volume on a 1.0 in rainfall. Computed by the Modified Stormwater Design Manual method for reference only. FAIRFAX COUNTY LDS's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER VDOT STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —

SOILS TABLE

USDA NRCS SSURGO — survey area VA059, Fairfax County

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
100	Urban land-Kingstons complex	—	—	—	—
101	Urban land-Wheaton complex	—	—	—	—
102	Wheaton loam, 2 to 25 percent slopes	.37	No	C	Well drained
103A	Wheaton-Codorus complex, 0 to 2 percent slopes	.37	No	B/D	Somewhat poorly drained
104B	Wheaton-Fairfax complex, 2 to 7 percent slopes	.37	No	B	Well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Fairfax County — parcels — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —

GRAPHIC SCALE — 1" = 30'

0 30 60 90 120 FEET



KEALEE

Design, build, deliver

PROJECT
3400 BARKLEY DR, FAIRFAX, VA, 22031
ADDRESS
3400 BARKLEY DR, FAIRFAX, VA, 22031
JURISDICTION
Fairfax County, Virginia
ZONE
R-1
SHEET
C-200 — Overall Site and Zoning Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Virginia Professional Engineer
certifies: Site, layout

SEAL AND SIGNATURE

Architect
certifies: architectural_footprint

SEAL AND SIGNATURE

This sheet carries content from more than one professional discipline. Each seal below applies only to the subjects listed beside it. No professional certifies content outside their stated scope, and the sheet is not divided into separate drawings for that purpose.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-200 — Overall Site and Zoning Plan
DISCIPLINE Virginia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA			
ZONE	R-1		
TAX / PARCEL ID	0582 04 0006		
GROSS TRACT AREA	37,710 SF	0.866 AC	
LOT FRONTAGE	—	128.56'	
SETBACKS	REQUIRED	PROVIDED	
FRONT YARD	40'	40'	
SIDE YARD	20'	20'	
REAR YARD	25'	25'	
COVERAGE	MAX	PROPOSED	
LOT COVERAGE	—	3.2%	
BUILDING FOOTPRINT	—	1,200 SF	
DATUM			
HORIZONTAL	EPSG:2248	NAD83	
VERTICAL	NAVD88 (feet)		

SITE ANALYSIS

1. Gross tract area	37,710 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	37,710 SF
6. TOTAL AREA DISTURBED	12,086 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH FAIRFAX COUNTY LDS

BUILDING DATA

	G	B	FF	SF	HT	STY
3400 BARKLEY DR, FAIRFAX VA, 22031	—	—	—	—	20'	2
FF = finished floor - SF = subfloor - HT = height - STY = storeys. A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run hydrographic survey before construction.						

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 5.0% impervious	37,710	0.866	
PRE-DEVELOPMENT	SF		C
Previous — lawn / meadow	37,710		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-lot paving	686		0.95
Previous — lawn	35,824		0.25
Composite C			0.285
Flow path			310 ft
Flow path slope			5.8 1%
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.82 in/hr
Peak discharge PHE, Q = CIA			1.48 cfs
Peak discharge POST, Q = CIA			1.68 cfs
INCREASE TO BE MANAGED			0.20 cfs
Rv = 0.05 + 0.008 I			0.0850
Water quality volume WQv			290 cf

Time of concentration by Kirpich over a 310 ft flow path at 5.8%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.82 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3. PFDS point estimate, 38.8559 N 77.2586 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. FAIRFAX COUNTY LDS's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

LEGEND

- — — PROPERTY BOUNDARY
- — — BRL — BUILDING RESTRICTION LINE
- — — PROPOSED STRUCTURE
- — — EXISTING CONTOUR — 2 FT INTERVAL, NAVD88
- — — PROPOSED CONTOUR — 2 FT INTERVAL
- — — STREET CENTRELINE
- — — PROPOSED PAVEMENT — DRIVEWAY / WALK
- — — EASEMENT
- — — SANITARY LATERAL (SHC) — HEAVIEST
- — — WATER SERVICE (WHC)
- — — STORM DRAIN — TRUNK, RCP
- — — STORM — HOUSE CONNECTION TO TRUNK
- — — DRAINAGE SWALE — INVERT AND GRADED SECTION
- — — RETAINING WALL — TICKS ON THE RETAINED SIDE
- — — LIMIT OF GROUND COVER — TICKS ON THE STEEP SIDE
- — — ESD — STORMWATER PRACTICE

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE	DATE
SEAL	LICENSE NO.
	EXPIRATION DATE

REVISIONS

— none —

SOILS TABLE — USDA NRCS SSURGO — survey area VA059, Fairfax County

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
100	Urban land-Kingstowne complex	—	—	—	—
101	Urban land-Wheaton complex	—	—	—	—
102	Wheaton loam, 2 to 25 percent slopes	.37	No	C	Well drained
103A	Wheaton-Codorus complex, 0 to 2 percent slopes	.37	No	B/D	Somewhat poorly drained
104B	Wheaton-Fairfax complex, 2 to 7 percent slopes	.37	No	B	Well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Fairfax County — parcels — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM — — —

GRAPHIC SCALE — 1" = 30'





KEALEE

Design, build, deliver

PROJECT
3400 BARKLEY DR, FAIRFAX, VA, 22031
ADDRESS
3400 BARKLEY DR, FAIRFAX, VA, 22031
JURISDICTION
Fairfax County, Virginia
ZONE
R-1
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
3 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)
PROFESSIONAL RESPONSIBILITY
Virginia Professional Engineer
certifies: grading_design, sediment_control, stormwater_design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Virginia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-1	
TAX / PARCEL ID	0582 04 0006	
GROSS TRACT AREA	37,710 SF	0.866 AC
LOT FRONTAGE	—	128.56'
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	40'	40'
SIDE YARD	20'	20'
REAR YARD	25'	25'
COVERAGE	MAX	PROPOSED
LOT COVERAGE	—	3.2%
BUILDING FOOTPRINT	—	1,200 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD88 (feet)	

SITE ANALYSIS

1. Gross tract area	37,710 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	37,710 SF
6. TOTAL AREA DISTURBED	12,086 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH FAIRFAX COUNTY LDS

BUILDING DATA

	G	B	FF	SF	HT	STY
3400 BARKLEY DR, FAIRFAX, VA, 22031	—	—	—	—	20'	2

FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 5.0% Impervious	37,710	0.866	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	37,710		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-lot paving	886		0.95
Pervious — lawn	35,824		0.25
Composite C			0.285
Flow path	310 ft		5.8 ft
Flow path slope	5.8 %		5.0 min
Time of concentration (Kirpich)	6.82 min		1.48 cfs
Rainfall intensity, 10-yr	1.68 cfs		1.68 cfs
Peak discharge PRE, Q = CIA	0.20 cfs		0.0950
Peak discharge POST, Q = CIA	0.20 cfs		0.0950
INCREASE TO BE MANAGED	0.0950		299 cf
Rv = 0.05 + 0.0091			
Water quality volume WQv			

Time of concentration by Kirpich over a 310 ft flow path at 5.8%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.82 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.8559 N 77.2598 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. FAIRFAX COUNTY LDS's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER VDOT STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —

SOILS TABLE USDA NRCS SSURGO — survey area VA059, Fairfax County

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
100	Urban land-Kingstowne complex	—	—	—	—
101	Urban land-Wheaton complex	—	—	—	—
102	Wheaton loam, 2 to 25 percent slopes	.37	No	C	Well drained
103A	Wheaton-Codorus complex, 0 to 2 percent slopes	.37	No	B/D	Somewhat poorly drained
104B	Wheaton-Fairfax complex, 2 to 7 percent slopes	.37	No	B	Well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Fairfax County — parcels — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 30'

0 30 60 90 120 FEET



KEALEE

Design, build, deliver

PROJECT
3400 BARKLEY DR, FAIRFAX, VA, 22031
ADDRESS
3400 BARKLEY DR, FAIRFAX, VA, 22031
JURISDICTION
Fairfax County, Virginia
ZONE
R-1
SHEET
C-500 — Utility Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)
PROFESSIONAL RESPONSIBILITY
Virginia Professional Engineer
certifies: Utility_Design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-500 — Utility Plan
DISCIPLINE Virginia Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-1
TAX / PARCEL ID	0582 04 0006
GROSS TRACT AREA	37,710 SF 0.866 AC
LOT FRONTAGE	— 128.56'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	40' 40'
SIDE YARD	20' 20'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	— 3.2%
BUILDING FOOTPRINT	— 1,200 SF
DATUM	—
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	37,710 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	37,710 SF
6. TOTAL AREA DISTURBED	12,086 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH FAIRFAX COUNTY LDS

BUILDING DATA

	G	B	FF	SF	HT	STY
3400 BARKLEY DR, FAIRFAX, VA, 22031	—	—	—	—	20'	2

Legend: G: Ground, B: Basement, FF: Finished floor, SF: Subfloor, HT: Height, STY: Storeys. A DASH IS NOT ZERO. The elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 5.0% Impervious	37,710	0.866	—
PRE-DEVELOPMENT	SF	—	C
Pervious — lawn / meadow	37,710	—	0.25
Composite C	—	—	0.250
POST-DEVELOPMENT	SF	—	C
Proposed roof	1,200	—	0.95
Driveway and on-lot paving	886	—	0.95
Pervious — lawn	35,824	—	0.25
Composite C	—	—	0.285
Flow path	310 ft	—	5.8 %
Flow path slope	5.8 %	—	5.0 min
Time of concentration (Kirpich)	10-yr	—	6.82 in/hr
Rainfall intensity, 10-yr	1.48 cfs	—	1.48 cfs
Peak discharge PRE, Q = CIA	1.68 cfs	—	1.68 cfs
Peak discharge POST, Q = CIA	0.20 cfs	—	0.20 cfs
INCREASE TO BE MANAGED	0.0950	—	0.0950
Rv = 0.05 + 0.0091	299 cf	—	299 cf
Water quality volume WQv	—	—	—

Time of concentration by Kirpich over a 310 ft flow path at 5.8%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.82 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38,859 in 77,298 W.
Water quality volume on a 1.0 in rainfall. Computed by the Modified Stormwater Design Manual method for reference only. FAIRFAX COUNTY LDS's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting
2. Obtain necessary permits
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation
4. Install stabilized construction entrance and perimeter sediment control
5. Rough grade the lot
6. Construct dwelling
7. Install water, sewer and storm services and the driveway
8. Fine grade and stabilize all disturbed areas
9. Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
2. EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
6. CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
7. NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER VDOT STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS


— NONE —

SOILS TABLE USDA NRCS SSURGO — survey area VA059, Fairfax County

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
100	Urban land-Kingstons complex	—	—	—	—
101	Urban land-Wheaton complex	—	—	—	—
102	Wheaton loam, 2 to 25 percent slopes	.37	No	C	Well drained
103A	Wheaton-Codorus complex, 0 to 2 percent slopes	.37	No	B/D	Somewhat poorly drained
104B	Wheaton-Fairfax complex, 2 to 7 percent slopes	.37	No	B	Well drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Fairfax County — parcels — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —

GRAPHIC SCALE — 1" = 30'





KEALEE

Design, build, deliver

PROJECT
3400 BARKLEY DR, FAIRFAX, VA, 22031
ADDRESS
3400 BARKLEY DR, FAIRFAX, VA, 22031
JURISDICTION
Fairfax County, Virginia
ZONE
R-1
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 30'
STATUS
PRELIMINARY
SHEET NO.
5 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Qualified Environmental Professional
certifies: tree_conservation

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANT TYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R-1
TAX / PARCEL ID	0582 04 0006
GROSS TRACT AREA	37,710 SF 0.866 AC
LOT FRONTAGE	— 128.56'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	40' 40'
SIDE YARD	20' 20'
REAR YARD	25' 25'
COVERAGE	MAX PROPOSED
LOT COVERAGE	— 3.2%
BUILDING FOOTPRINT	— 1,200 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	37,710 SF
2. Area of dwelling	1,200 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	37,710 SF
6. TOTAL AREA DISTURBED	12,086 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH FAIRFAX COUNTY LDS

BUILDING DATA

	G	B	FF	SF	HT	STY
3400 BARKLEY DR, FAIRFAX, VA, 22031	—	—	—	—	20'	2

FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 5.0% Impervious	37,710	0.866	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	37,710		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	1,200		0.95
Driveway and on-lot paving	886		0.95
Pervious — lawn	35,824		0.25
Composite C			0.285
Flow path	310 ft		5.8 %
Flow path slope	5.8 %		5.0 min
Time of concentration (Kirpich)	10-yr		6.82 in/hr
Rainfall intensity, 10-yr	1.48 cfs		1.48 cfs
Peak discharge PRE, Q = CIA	1.68 cfs		1.68 cfs
Peak discharge POST, Q = CIA	0.20 cfs		0.20 cfs
INCREASE TO BE MANAGED	0.0950		0.0950
Rv = 0.05 + 0.0091			299 cf
Water quality volume WQv			

Time of concentration by Kirpich over a 310 ft flow path at 5.8%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.82 in/hr for the 10-year storm at a 5.0 minute duration. NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.8559 N 77.2598 W.
Water quality volume on a 1.0 in rainfall. Computed by the Maryland Stormwater Design Manual method for reference only. FAIRFAX COUNTY LDS's own stormwater method governs this lot.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed area.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER VDOT STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE COMMONWEALTH OF VIRGINIA.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NOTE —	

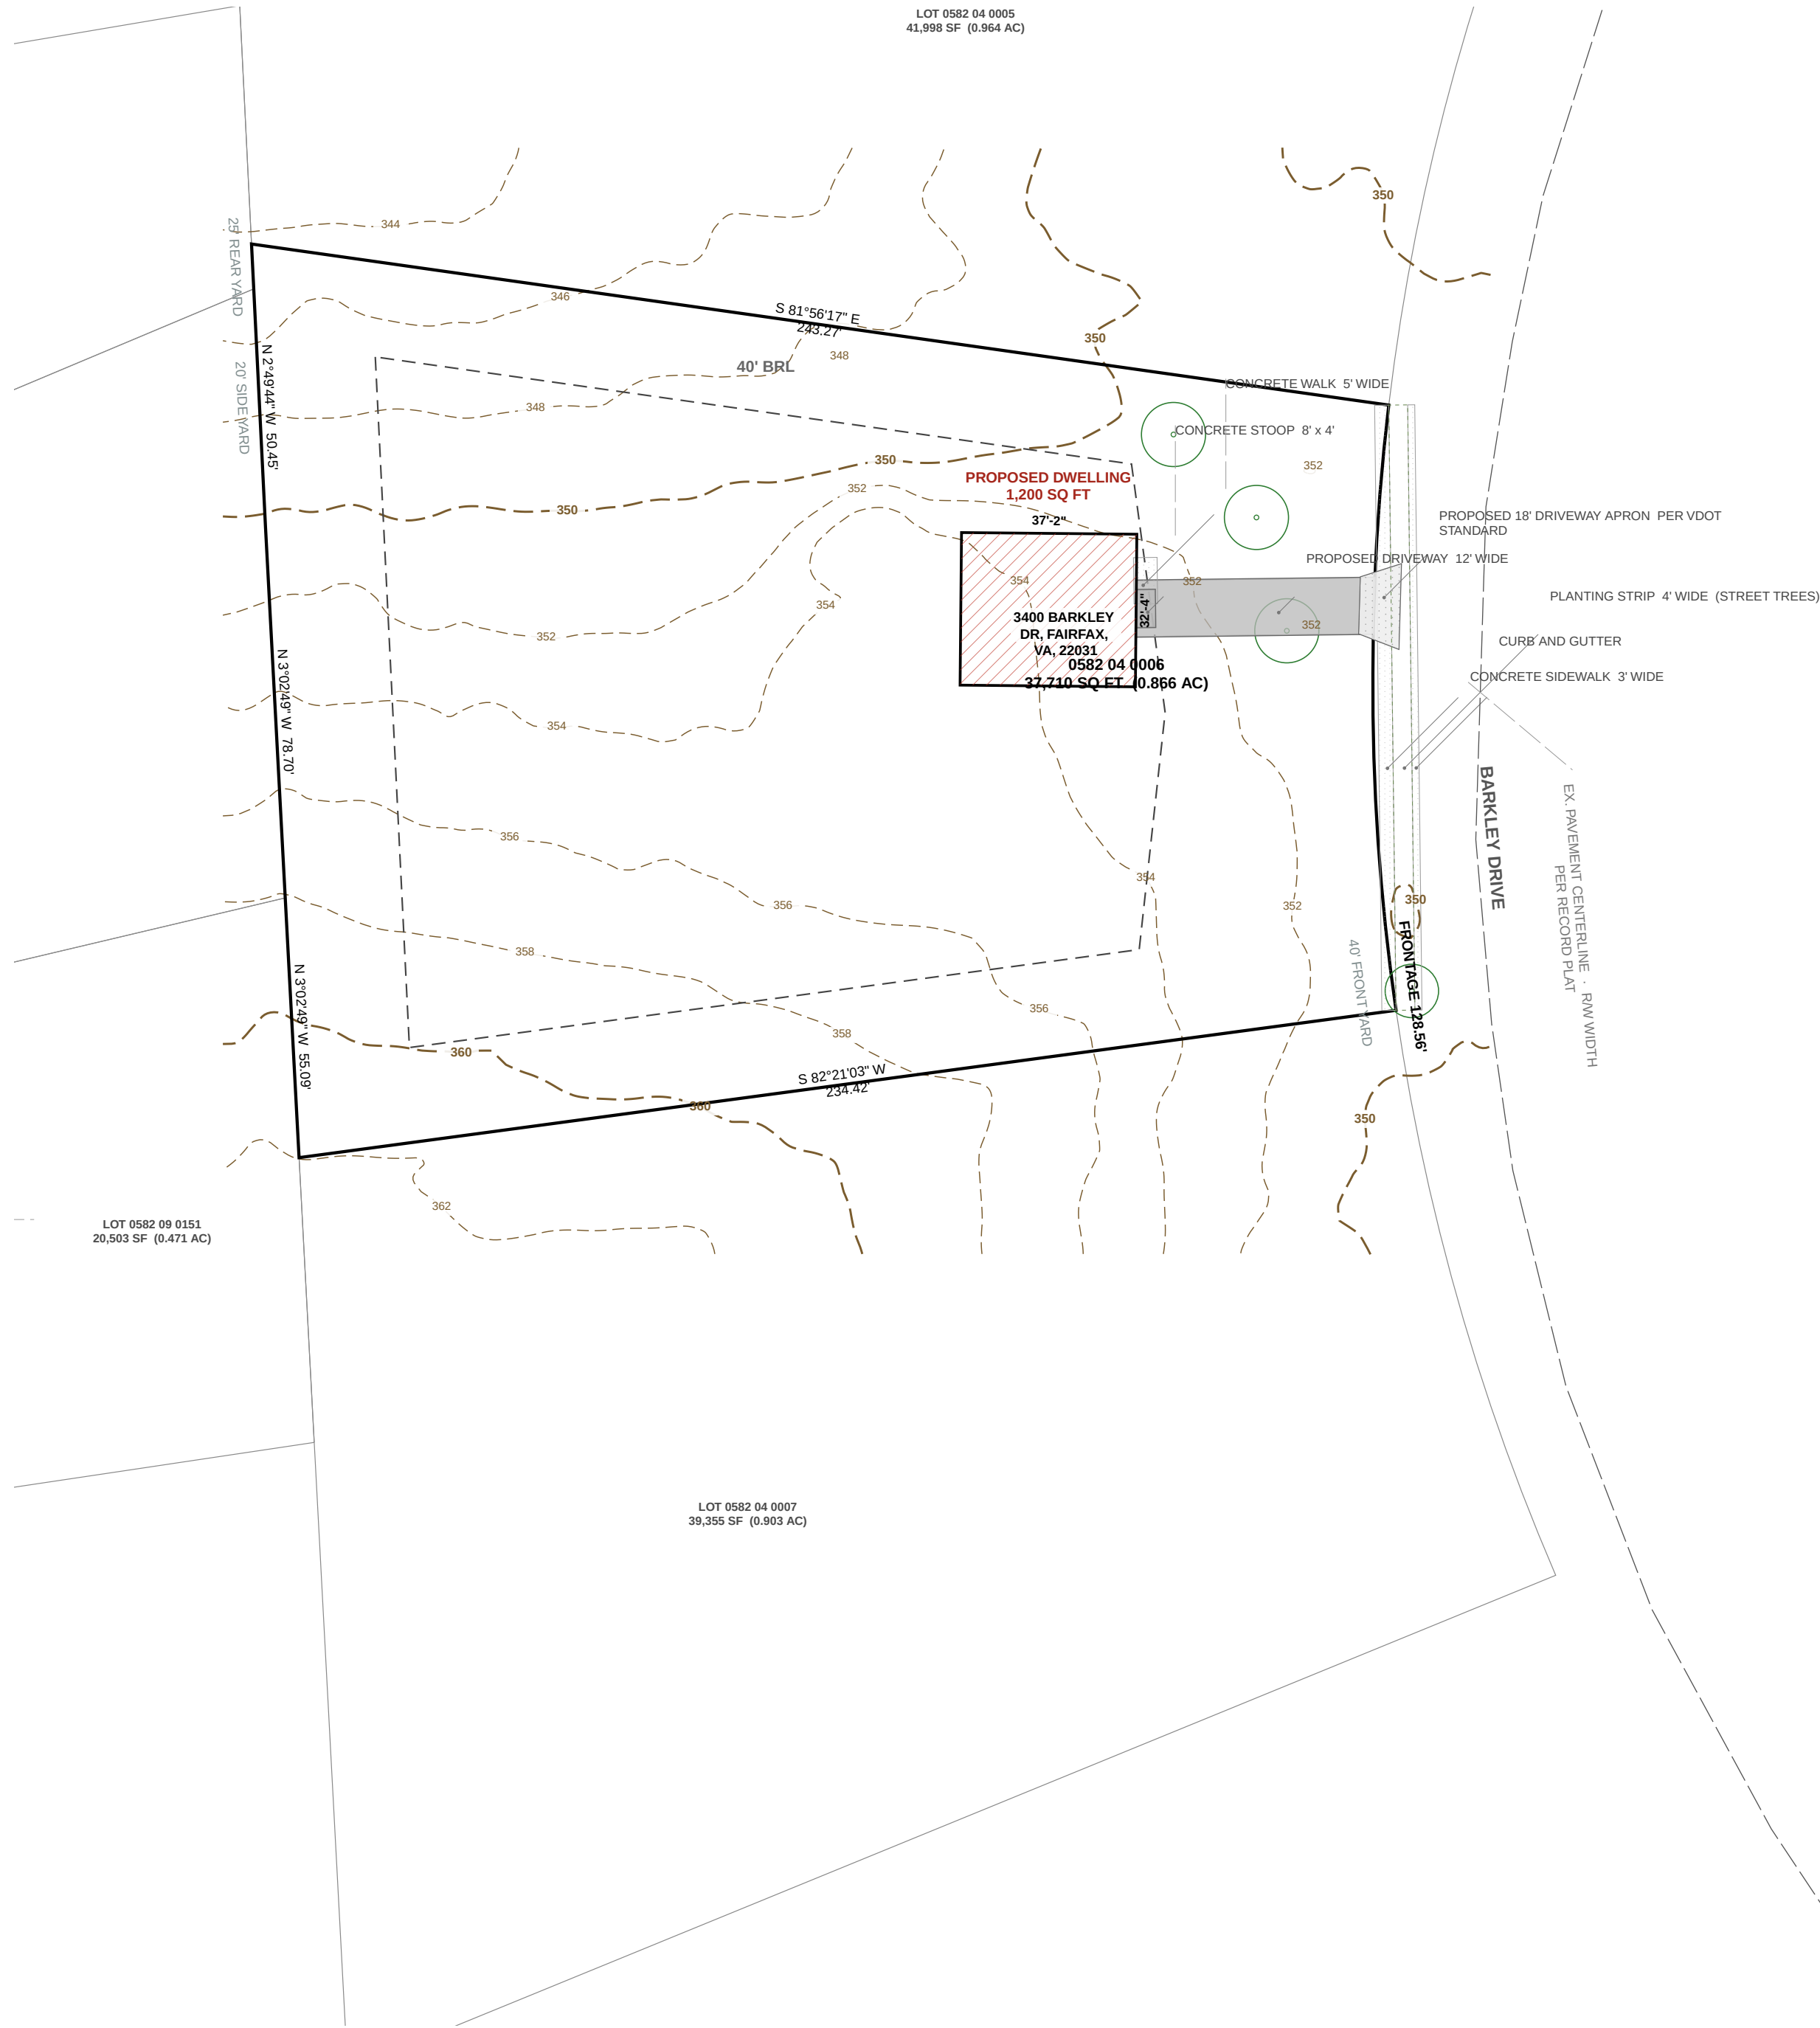

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Fairfax County — parcels — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

