



KEALEE

Design, build, deliver

PROJECT
4600 WHEELER ROAD — PRELIMINARY SUBDIVISION CONCEPT — LOTS 1-14 (proposed)
ADDRESS
4600 WHEELER ROAD
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-95
SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
1 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape
DISCIPLINE Maryland Professional Engineer / Surveyor (see divided responsibility)
DRAWN BY
DESIGNED BY KEALEE SITE-PLAN ENGINEER
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- 1 C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

TAX / PARCEL ID	RSF-95
GROSS TRACT AREA	230,997 SF
LOT 1 (proposed) AREA	9,536 SF 0.219 AC
LOT 2 (proposed) AREA	12,280 SF 0.282 AC
LOT 3 (proposed) AREA	13,306 SF 0.305 AC
LOT 4 (proposed) AREA	14,333 SF 0.329 AC
LOT 5 (proposed) AREA	13,376 SF 0.307 AC
LOT 6 (proposed) AREA	11,062 SF 0.254 AC
LOT 7 (proposed) AREA	11,062 SF 0.254 AC
LOT 8 (proposed) AREA	11,062 SF 0.254 AC
LOT 9 (proposed) AREA	11,549 SF 0.265 AC
LOT 10 (proposed) AREA	9,719 SF 0.223 AC
LOT 11 (proposed) AREA	11,539 SF 0.265 AC
LOT 12 (proposed) AREA	12,552 SF 0.288 AC
LOT 13 (proposed) AREA	18,243 SF 0.419 AC
LOT 14 (proposed) AREA	12,992 SF 0.298 AC
NET LOT AREA	172,610 SF 3.963 AC
LOT 1 (proposed) FRONTAGE	50' MIN 115.00'
LOT 2 (proposed) FRONTAGE	50' MIN 76.29'
LOT 3 (proposed) FRONTAGE	50' MIN 76.29'
LOT 4 (proposed) FRONTAGE	50' MIN 76.29'
LOT 5 (proposed) FRONTAGE	50' MIN 76.29'
LOT 6 (proposed) FRONTAGE	50' MIN 76.29'
LOT 7 (proposed) FRONTAGE	50' MIN 76.29'
LOT 8 (proposed) FRONTAGE	50' MIN 76.29'
LOT 9 (proposed) FRONTAGE	50' MIN 152.59'
LOT 10 (proposed) FRONTAGE	50' MIN 78.33'
LOT 11 (proposed) FRONTAGE	50' MIN 76.34'
LOT 12 (proposed) FRONTAGE	50' MIN 76.34'
LOT 13 (proposed) FRONTAGE	50' MIN 245.22'
LOT 14 (proposed) FRONTAGE	50' MIN 177.06'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	6' 6'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 13.8%
BUILDING FOOTPRINT	— 23,800 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area 230,997 SF
2. Area of dwelling 23,800 SF
3. Wooded area NOT ESTABLISHED
4. Floodplain area NOT ESTABLISHED
5. Net lot area 172,610 SF
6. TOTAL AREA DISTURBED 143,309 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1 (proposed)	140.73	—	141.06	140.06	20'	2
LOT 2 (proposed)	157.76	—	158.09	157.09	20'	2
LOT 3 (proposed)	160.80	—	161.13	160.13	20'	2
LOT 4 (proposed)	165.50	—	165.83	164.83	20'	2
LOT 5 (proposed)	169.55	—	169.88	168.88	20'	2
LOT 6 (proposed)	175.63	—	175.96	174.96	20'	2
LOT 7 (proposed)	180.03	—	180.36	179.36	20'	2
LOT 8 (proposed)	181.75	—	182.08	181.08	20'	2
LOT 9 (proposed)	183.24	—	183.57	182.57	20'	2
LOT 10 (proposed)	183.44	—	183.77	182.77	20'	2
LOT 11 (proposed)	185.67	—	186.00	185.00	20'	2
LOT 12 (proposed)	187.67	—	188.00	187.00	20'	2
LOT 13 (proposed)	187.04	—	187.37	186.37	20'	2
LOT 14 (proposed)	186.16	—	186.49	185.49	20'	2

G: ground elev.; B: basement; FF: finished floor; SF: surface; HT: height; STY: stories; A DASH IS NOT 25.00' the elevation has not been established and must be set from a field run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS


CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1 (proposed)	9,536	21.9%	0.37	0.59	0.22	196
LOT 2 (proposed)	12,280	17.0%	0.47	0.70	0.23	208
LOT 3 (proposed)	13,306	15.6%	0.51	0.74	0.23	213
LOT 4 (proposed)	14,333	14.6%	0.55	0.78	0.23	216
LOT 5 (proposed)	13,376	15.6%	0.52	0.74	0.22	212
LOT 6 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 7 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 8 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 9 (proposed)	11,549	18.1%	0.44	0.67	0.23	205
LOT 10 (proposed)	9,719	21.5%	0.37	0.60	0.23	197
LOT 11 (proposed)	11,539	18.1%	0.44	0.67	0.23	205
LOT 12 (proposed)	12,552	16.6%	0.71	0.93	0.23	209
LOT 13 (proposed)	18,243	11.5%	0.70	0.93	0.23	233
LOT 14 (proposed)	12,992	16.2%	0.50	0.73	0.23	212
PROJECT TOTAL	172,610	17.0%	6.64	9.81	3.17	2,915

Peak flows are summed for catchments; Q in cfs. WQV is the required water-quality volume.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.


SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

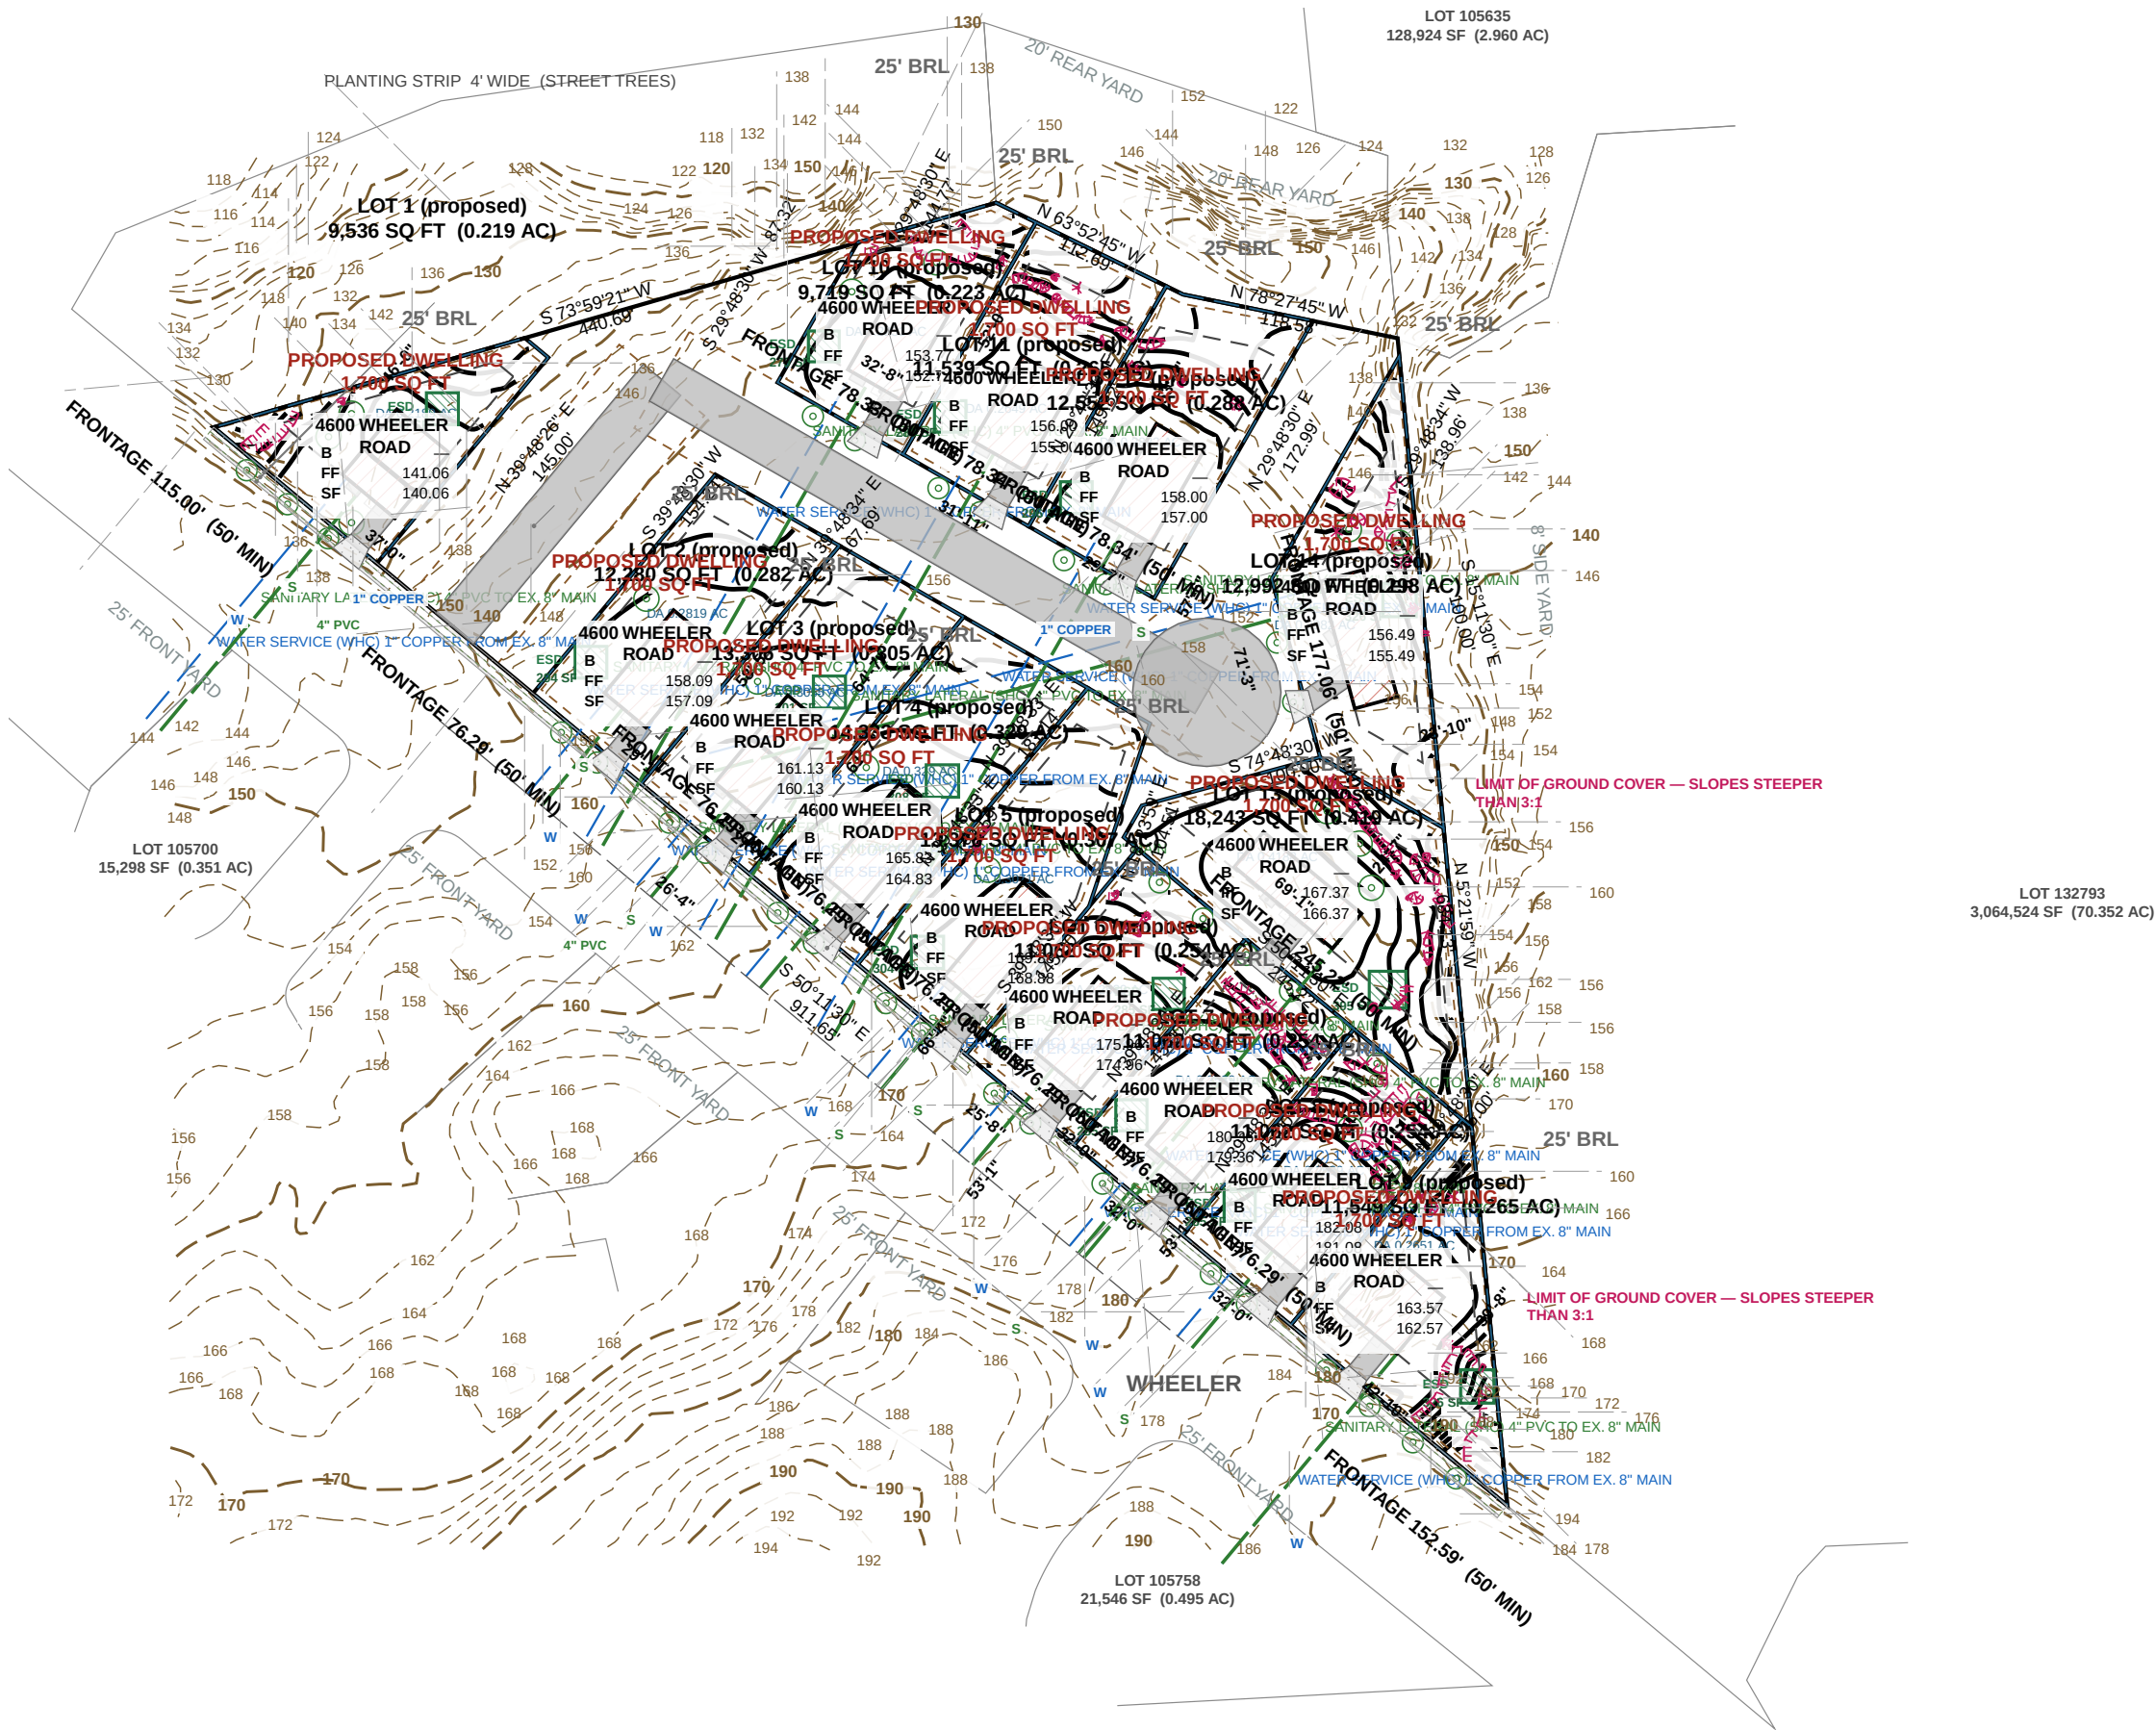

SOILS STABLE USDA NRCS SSURGO — PGC Code Sec. 32.133(X)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

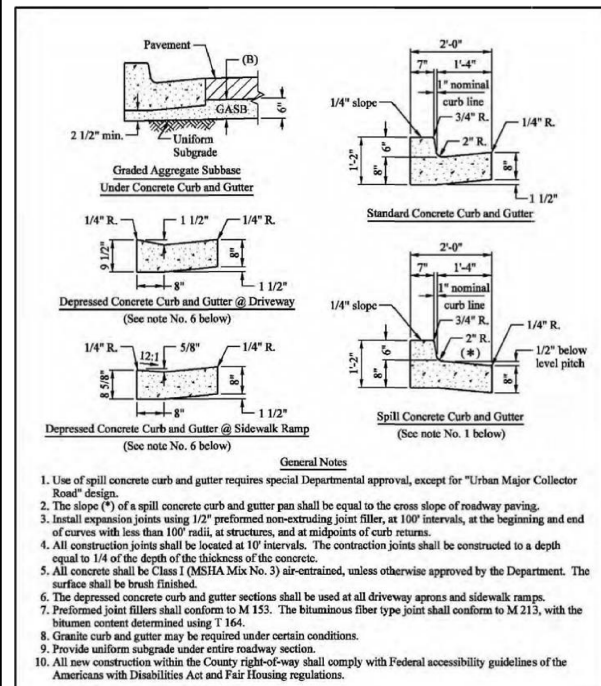

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DESIGNED BY	APPROVED BY	Concrete Curb and Gutter
REVISION 01/15/12		300.01

GRAPHIC SCALE — 1" = 100'

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

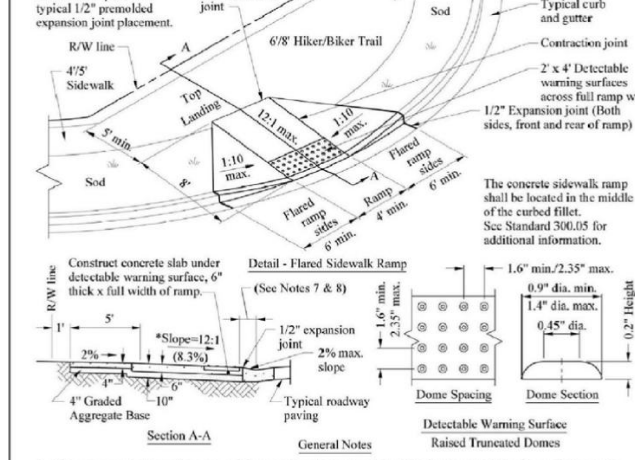

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DESIGNED BY	APPROVED BY	Concrete Sidewalk Ramp Type "A"
REVISION 01/15/12		300.07

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
4600 WHEELER ROAD — PRELIMINARY SUBDIVISION CONCEPT — LOTS 1-14 (proposed)

ADDRESS
4600 WHEELER ROAD

JURISDICTION
Prince George's County, Maryland

ZONE
RSF-95

SHEET
L-100 — Landscape and Tree Canopy Plan

SCALE
1" = 100'

STATUS
PRELIMINARY

SHEET NO.
2 OF 3

COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- 1 C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

ZONE	RSF-95
TAX / PARCEL ID	230,997 SF
GROSS TRACT AREA	5,303 AC
LOT 1 (proposed) AREA	9,536 SF 0.219 AC
LOT 2 (proposed) AREA	12,280 SF 0.282 AC
LOT 3 (proposed) AREA	13,306 SF 0.305 AC
LOT 4 (proposed) AREA	14,333 SF 0.329 AC
LOT 5 (proposed) AREA	13,376 SF 0.307 AC
LOT 6 (proposed) AREA	11,062 SF 0.254 AC
LOT 7 (proposed) AREA	11,062 SF 0.254 AC
LOT 8 (proposed) AREA	11,062 SF 0.254 AC
LOT 9 (proposed) AREA	11,549 SF 0.265 AC
LOT 10 (proposed) AREA	9,719 SF 0.223 AC
LOT 11 (proposed) AREA	11,539 SF 0.265 AC
LOT 12 (proposed) AREA	12,552 SF 0.288 AC
LOT 13 (proposed) AREA	18,243 SF 0.419 AC
LOT 14 (proposed) AREA	12,992 SF 0.298 AC
NET LOT AREA	172,610 SF 3.963 AC
LOT 1 (proposed) FRONTAGE	50' MIN 115.00'
LOT 2 (proposed) FRONTAGE	50' MIN 76.29'
LOT 3 (proposed) FRONTAGE	50' MIN 76.29'
LOT 4 (proposed) FRONTAGE	50' MIN 76.29'
LOT 5 (proposed) FRONTAGE	50' MIN 76.29'
LOT 6 (proposed) FRONTAGE	50' MIN 76.29'
LOT 7 (proposed) FRONTAGE	50' MIN 76.29'
LOT 8 (proposed) FRONTAGE	50' MIN 76.29'
LOT 9 (proposed) FRONTAGE	50' MIN 152.59'
LOT 10 (proposed) FRONTAGE	50' MIN 78.33'
LOT 11 (proposed) FRONTAGE	50' MIN 78.34'
LOT 12 (proposed) FRONTAGE	50' MIN 78.34'
LOT 13 (proposed) FRONTAGE	50' MIN 245.22'
LOT 14 (proposed) FRONTAGE	50' MIN 177.06'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	0' 0'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 13.8%
BUILDING FOOTPRINT	— 23,800 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area 230,997 SF
2. Area of dwelling 23,800 SF
3. Wooded area NOT ESTABLISHED
4. Floodplain area NOT ESTABLISHED
5. Net lot area 172,610 SF
6. TOTAL AREA DISTURBED 143,309 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1 (proposed)	140.73	—	141.06	140.06	20'	2
LOT 2 (proposed)	157.76	—	158.09	157.09	20'	2
LOT 3 (proposed)	160.80	—	160.13	160.13	20'	2
LOT 4 (proposed)	165.50	—	165.83	164.83	20'	2
LOT 5 (proposed)	169.55	—	169.88	168.88	20'	2
LOT 6 (proposed)	175.63	—	175.96	174.96	20'	2
LOT 7 (proposed)	180.03	—	180.36	179.36	20'	2
LOT 8 (proposed)	181.75	—	182.08	181.08	20'	2
LOT 9 (proposed)	183.24	—	183.57	182.57	20'	2
LOT 10 (proposed)	183.44	—	183.77	182.77	20'	2
LOT 11 (proposed)	185.67	—	186.00	185.00	20'	2
LOT 12 (proposed)	187.67	—	188.00	187.00	20'	2
LOT 13 (proposed)	187.04	—	187.37	186.37	20'	2
LOT 14 (proposed)	186.16	—	186.49	185.49	20'	2

G: ground elev.; B: basement; FF: finished floor; SF: surface; HT: height; STY: story; A DASH IS NOT 25.00' the elevation has not been established and must be set from a field or topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQ ¹ CF
LOT 1 (proposed)	9,536	21.9%	0.37	0.59	0.22	196
LOT 2 (proposed)	12,280	17.0%	0.47	0.70	0.23	208
LOT 3 (proposed)	13,306	15.9%	0.51	0.74	0.23	213
LOT 4 (proposed)	14,333	14.6%	0.55	0.78	0.23	216
LOT 5 (proposed)	13,376	15.6%	0.52	0.74	0.22	212
LOT 6 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 7 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 8 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 9 (proposed)	11,549	18.1%	0.44	0.67	0.23	205
LOT 10 (proposed)	9,719	21.5%	0.37	0.60	0.23	197
LOT 11 (proposed)	11,539	18.1%	0.44	0.67	0.23	205
LOT 12 (proposed)	12,552	16.6%	0.71	0.93	0.23	209
LOT 13 (proposed)	18,243	11.5%	0.70	0.93	0.23	233
LOT 14 (proposed)	12,992	16.2%	0.50	0.73	0.23	212
PROJECT TOTAL	172,610	17.0%	6.64	9.81	3.17	2,915

¹ Peak flows are summed for catchments; Q in cfs. WQ¹ is the required water-quality volume.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE

DATE


SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —

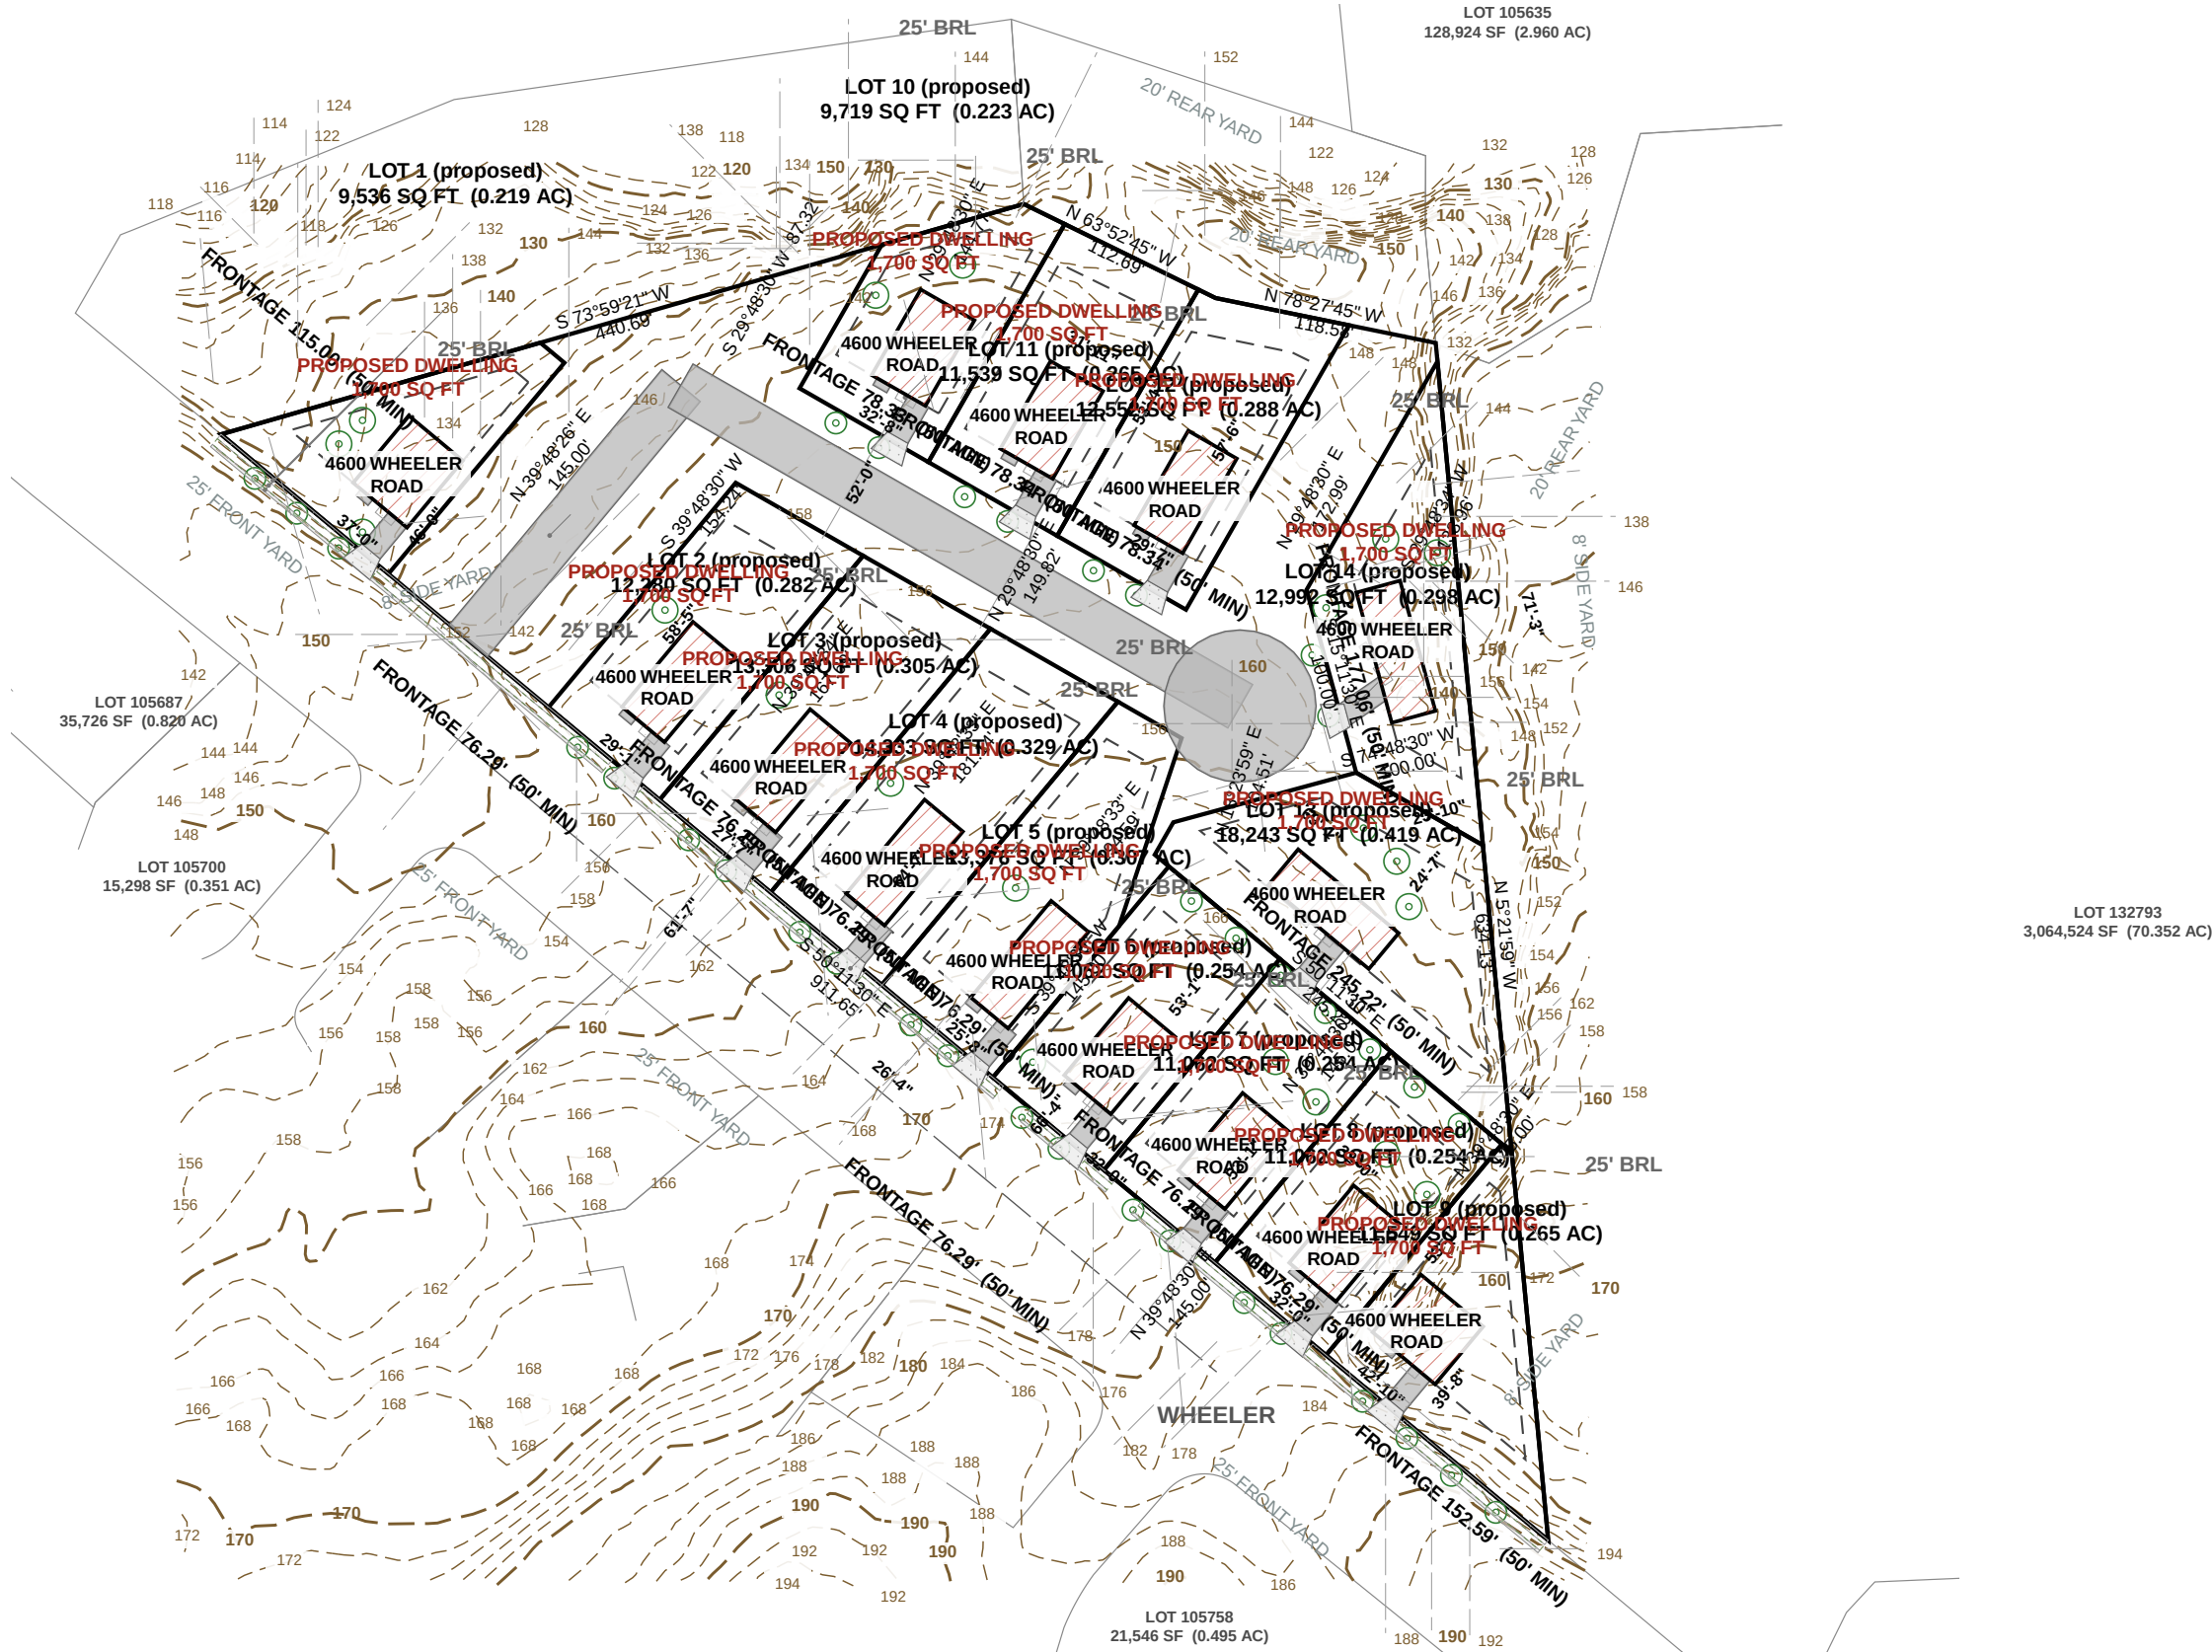

TREE CANOPY SCHEDULE

Sec. 25-128 Table 1 as amended by CB-021-2024 — 20% of NET tract area on RSF-95, met within 8'. Per lot planting per Landscape Manual Sec. 4.1(c)(3). Street trees in the right-of-way count toward canopy under Sec. 25-129.

LOT	NET AREA SF	CANOPY REQ 20% SF	SHADE PROV / REQ	ORN-EVGN PROV / REQ	STREET TREES	10-YR CANOPY PROVIDED
LOT 1 (proposed)	9,536	1,907	0 / 2 SHORT	3	NOT ESTABLISHED	
LOT 2 (proposed)	12,280	2,456	1 / 3 SHORT	0 / 2 SHORT	2	NOT ESTABLISHED
LOT 3 (proposed)	13,306	2,661	1 / 3 SHORT	0 / 2 SHORT	2	NOT ESTABLISHED
LOT 4 (proposed)	14,333	2,867	1 / 3 SHORT	0 / 2 SHORT	2	NOT ESTABLISHED
LOT 5 (proposed)	13,376	2,675	1 / 3 SHORT	2	NOT ESTABLISHED	
LOT 6 (proposed)	11,062	2,212	1 / 3 SHORT	2	NOT ESTABLISHED	
LOT 7 (proposed)	11,062	2,212	2 / 3 SHORT	0 / 2 SHORT	2	NOT ESTABLISHED
LOT 8 (proposed)	11,062	2,212	2 / 3 SHORT	0 / 2 SHORT	2	NOT ESTABLISHED
LOT 9 (proposed)	11,549	2,310	0 / 3 SHORT	0 / 2 SHORT	4	NOT ESTABLISHED

* 6 further rows(s) — see the accompanying schedule

TEN-YEAR CANOPY IS CREDITED PER SPECIES FROM THE PRINCE GEORGE'S COUNTY LANDSCAPE MANUAL. NO SPECIES HAS BEEN SELECTED ON THIS SET, SO THE CANOPY PROVIDED IS NOT ESTABLISHED AND THE SCHEDULE IS NOT YET BALANCED. EXISTING TREES PRESERVED ALSO COUNT.


NO TREE IS PLANTED WITHIN A STORM DRAIN EASEMENT. THE 60 FT 54% EASEMENT CARRIES THE 42 IN RCP MAIN AND THE 10 FT REAR EASEMENT CARRIES THE DRAINAGE SWALE. BOTH ARE SHOWN ON THIS SHEET AND BOTH ARE EXCLUDED FROM PLANTABLE AREA.

A WARNING OF THE CANOPY REQUIREMENT IS AVAILABLE UNDER SEC. 25-130.

PER LOT PLANTING IS SHOWN ON EVERY LOT AS DRAWN. LANDSCAPE MANUAL, SEC. 4.1(c)(3) REQUIRES A MAJOR SHADE AND 3 ORNAMENTAL OR EVERGREEN TREES ON A LOT OF 20,000 SF OR MORE, AND 3 AND 1 ON A LOT OF 9,500 TO 19,999 SF. NO ORNAMENTAL OR EVERGREEN TREES ARE DRAWN. AT LEAST ONE SHADE TREE MUST STAND ON THE SOUTH OR WEST SIDE WITHIN 30 FT OF THE DWELING, AND AT LEAST ONE REQUIRED TREE IN THE FRONT YARD. SPECIES AND FINAL LOCATIONS BY THE LANDSCAPE ARCHITECT.

THE CANOPY REQUIREMENT MUST BE MET ON-SITE UNLESS A VARIANCE IS APPROVED, AND WHERE A GRADING PERMIT IS THE ONLY APPLICATION THE CANOPY NOTES BELONG ON THE GRADING PLAN — ENVIRONMENTAL, TECHNICAL, PART D, SEC. 3.0.

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

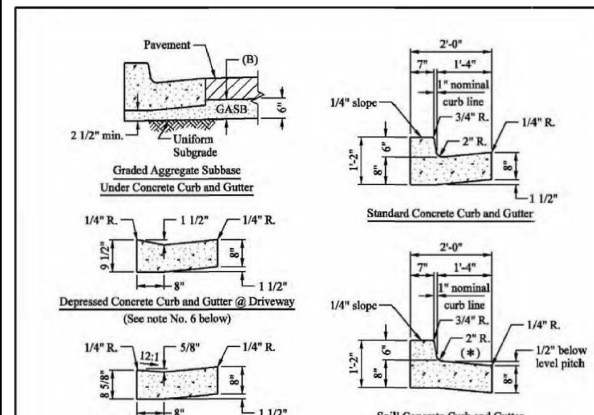

1. Use of gullies, concrete curb and gutter requires special Department approval, except for "Urban Major Collector" and "Urban Minor Collector".
2. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
3. All materials shall be tested and approved by the Department. The materials shall be tested and approved by the Department. The materials shall be tested and approved by the Department.
4. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
5. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
6. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
7. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
8. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
9. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
10. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.

APPROVED: [Signature] DATE: [Date]


REVISIONS: [Table]

DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
Prince George's County, MD

Concrete Curb and Gutter
300.01

GRAPHIC SCALE — 1" = 100'

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

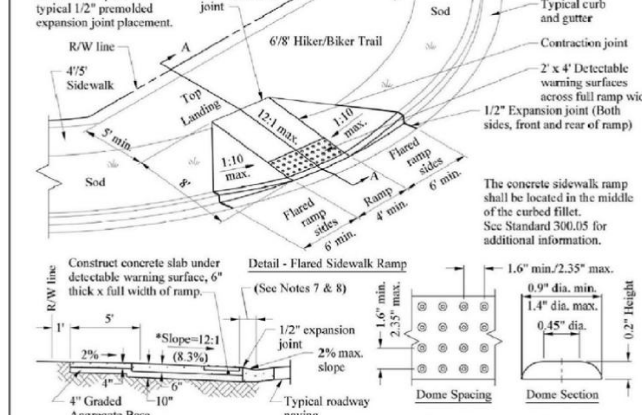

1. All new concrete sidewalk ramps and depressed curbs constructed within the County right-of-way shall comply with the Federal accessibility guidelines of the Americans with Disabilities Act. See Standard 300.01 for depressed curb requirements.
2. All sidewalk ramps and curb structures shall be designed and constructed so that water will not accumulate on ramp surfaces.
3. The sidewalk ramp shall be constructed with the base parallel to the curb face, and to exceed 12.5'.
4. All concrete shall be Class 1 (MSHA No. 1) or equivalent, unless otherwise approved by the Department.
5. All concrete shall be Class 1 (MSHA No. 1) or equivalent, unless otherwise approved by the Department.
6. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
7. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
8. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
9. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.
10. The curb and gutter shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface, and shall be constructed to provide a smooth, continuous surface.

APPROVED: [Signature] DATE: [Date]

REVISIONS: [Table]

DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
Prince George's County, MD

Concrete Sidewalk Ramp Type "A"
300.07

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
4600 WHEELER ROAD — PRELIMINARY SUBDIVISION CONCEPT — LOTS 1-14 (proposed)
ADDRESS
4600 WHEELER ROAD
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-95
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
3 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINEER
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- 1 C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

TAX / PARCEL ID	RSF-95
GROSS TRACT AREA	230,997 SF
LOT 1 (proposed) AREA	9,536 SF
LOT 2 (proposed) AREA	12,280 SF
LOT 3 (proposed) AREA	13,306 SF
LOT 4 (proposed) AREA	14,333 SF
LOT 5 (proposed) AREA	13,376 SF
LOT 6 (proposed) AREA	11,062 SF
LOT 7 (proposed) AREA	11,062 SF
LOT 8 (proposed) AREA	11,062 SF
LOT 9 (proposed) AREA	11,549 SF
LOT 10 (proposed) AREA	9,719 SF
LOT 11 (proposed) AREA	11,539 SF
LOT 12 (proposed) AREA	12,552 SF
LOT 13 (proposed) AREA	18,243 SF
LOT 14 (proposed) AREA	12,992 SF
NET LOT AREA	172,610 SF
LOT 1 (proposed) FRONTAGE	50' MIN
LOT 2 (proposed) FRONTAGE	50' MIN
LOT 3 (proposed) FRONTAGE	50' MIN
LOT 4 (proposed) FRONTAGE	50' MIN
LOT 5 (proposed) FRONTAGE	50' MIN
LOT 6 (proposed) FRONTAGE	50' MIN
LOT 7 (proposed) FRONTAGE	50' MIN
LOT 8 (proposed) FRONTAGE	50' MIN
LOT 9 (proposed) FRONTAGE	50' MIN
LOT 10 (proposed) FRONTAGE	50' MIN
LOT 11 (proposed) FRONTAGE	50' MIN
LOT 12 (proposed) FRONTAGE	50' MIN
LOT 13 (proposed) FRONTAGE	50' MIN
LOT 14 (proposed) FRONTAGE	50' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	5' 5'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 13.8%
BUILDING FOOTPRINT	— 23,800 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area 230,997 SF
2. Area of dwelling 23,800 SF
3. Wooded area NOT ESTABLISHED
4. Floodplain area NOT ESTABLISHED
5. Net lot area 172,610 SF
6. TOTAL AREA DISTURBED 143,309 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1 (proposed)	140.73	—	141.06	140.06	20'	2
LOT 2 (proposed)	157.76	—	158.09	157.09	20'	2
LOT 3 (proposed)	160.80	—	161.13	160.13	20'	2
LOT 4 (proposed)	165.50	—	165.83	164.83	20'	2
LOT 5 (proposed)	169.55	—	169.88	168.88	20'	2
LOT 6 (proposed)	175.63	—	175.96	174.96	20'	2
LOT 7 (proposed)	180.03	—	180.36	179.36	20'	2
LOT 8 (proposed)	181.75	—	182.08	181.08	20'	2
LOT 9 (proposed)	183.24	—	183.57	182.57	20'	2
LOT 10 (proposed)	183.44	—	183.77	182.77	20'	2
LOT 11 (proposed)	185.67	—	186.00	185.00	20'	2
LOT 12 (proposed)	187.67	—	188.00	187.00	20'	2
LOT 13 (proposed)	187.04	—	187.37	186.37	20'	2
LOT 14 (proposed)	186.16	—	186.49	185.49	20'	2

G: ground elev.; B: basement; FF: finished floor; SF: surface; HT: height; STY: stories; A DASH IS NOT ZERO; the elevation has not been established and must be set from a field run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQ ₁₀ CF
LOT 1 (proposed)	9,536	21.9%	0.37	0.59	0.22	196
LOT 2 (proposed)	12,280	17.0%	0.47	0.70	0.23	208
LOT 3 (proposed)	13,306	15.6%	0.51	0.74	0.23	213
LOT 4 (proposed)	14,333	14.6%	0.55	0.78	0.23	216
LOT 5 (proposed)	13,376	15.6%	0.52	0.74	0.22	212
LOT 6 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 7 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 8 (proposed)	11,062	18.9%	0.43	0.65	0.22	203
LOT 9 (proposed)	11,549	18.1%	0.44	0.67	0.23	205
LOT 10 (proposed)	9,719	21.5%	0.37	0.60	0.23	197
LOT 11 (proposed)	11,539	18.1%	0.44	0.67	0.23	205
LOT 12 (proposed)	12,552	16.6%	0.71	0.93	0.23	209
LOT 13 (proposed)	18,243	11.5%	0.70	0.93	0.23	233
LOT 14 (proposed)	12,992	16.2%	0.50	0.73	0.23	212
PROJECT TOTAL	172,610	17.0%	6.64	9.81	3.17	2,915


Peak flows are summed for catchments; Q in cfs. WQ₁₀ is the required water-quality volume.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


IF REQUIRED NOTE(S) DO NOT FIT THIS SHEET, GRADING CERTIFICATE, STABILIZATION COMPLIANCE PREAMBLE, STANDARD STABILIZATION NOTE, THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

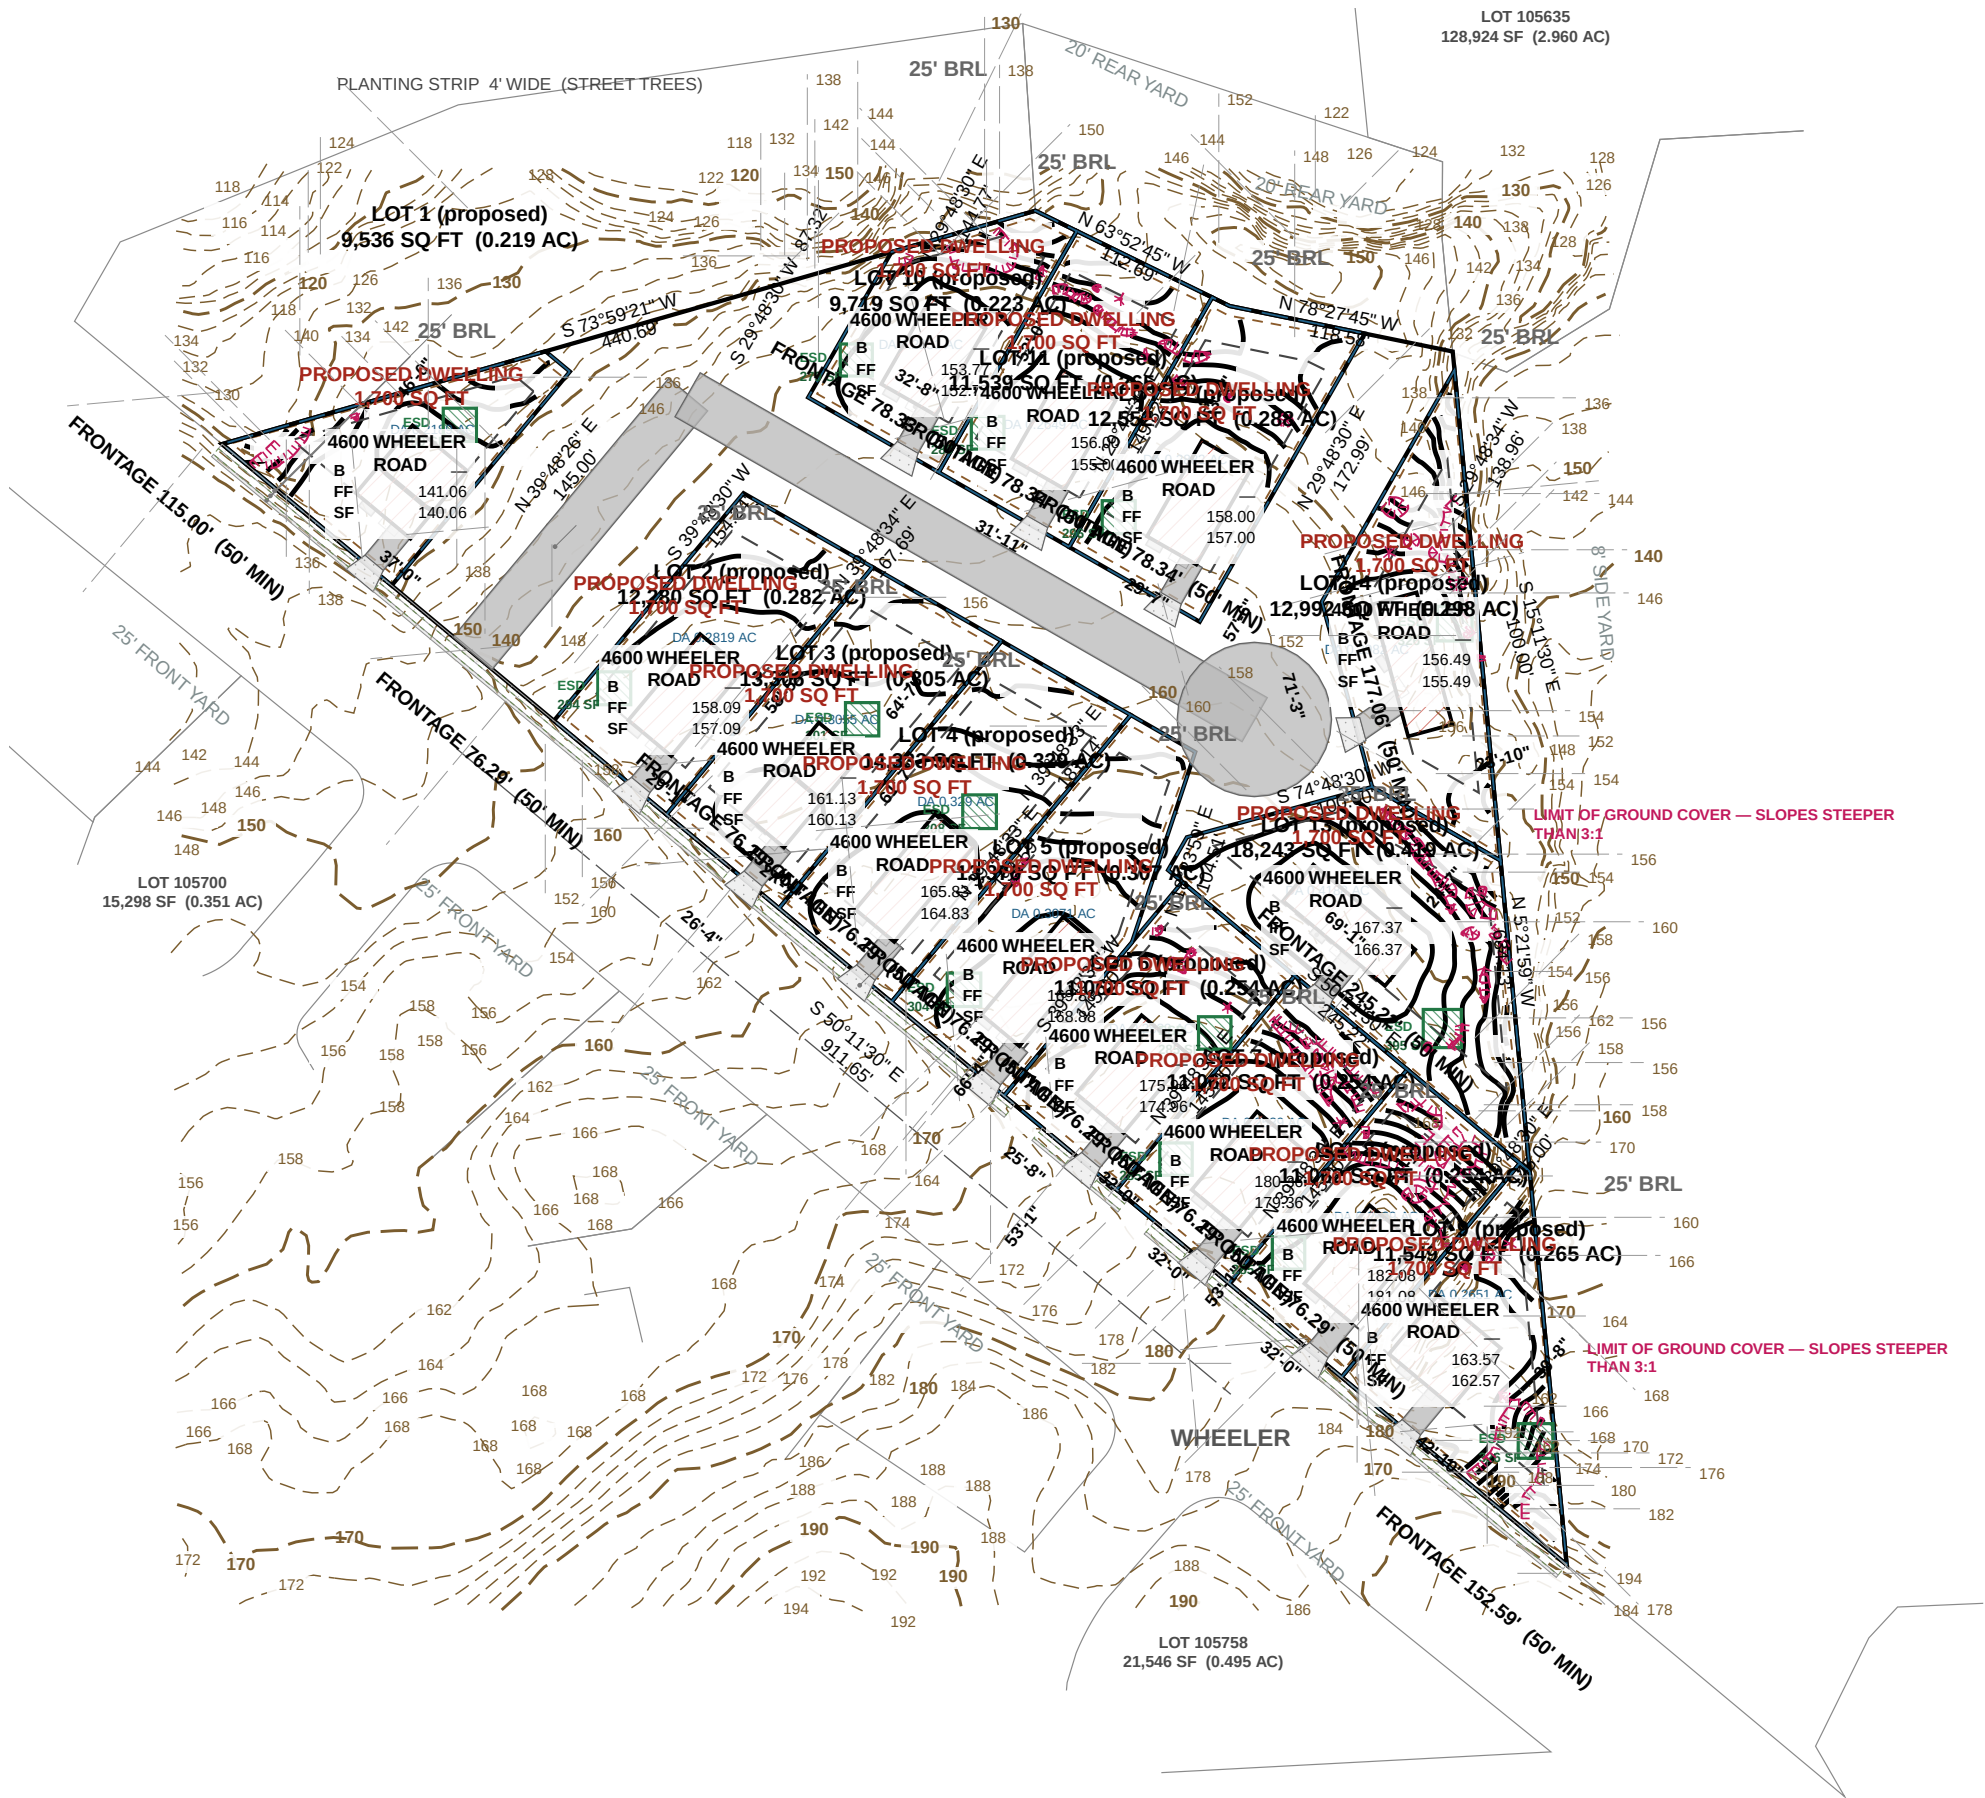

SOILS STABLE USDA NRCS SSURGO — PGC Code Sec. 32.13(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

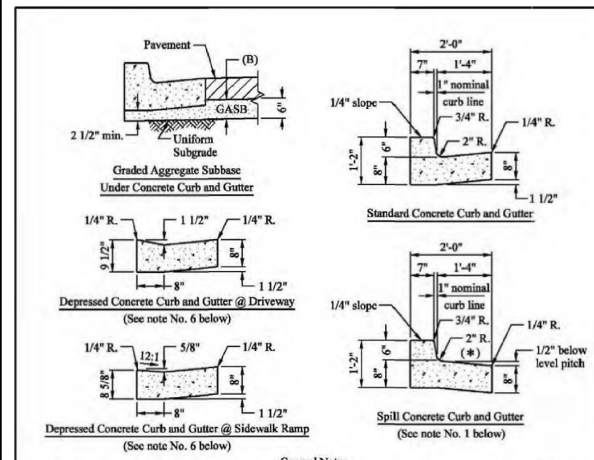


1. Use of gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
2. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
3. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
4. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
5. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
6. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
7. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
8. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
9. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.
10. The gullies shall be gullies, concrete curb and gutter systems, and drainage systems, except for "C" when Major Collector is used.

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
CONCRETE CURB AND GUTTER	300.01	Concrete Curb and Gutter

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

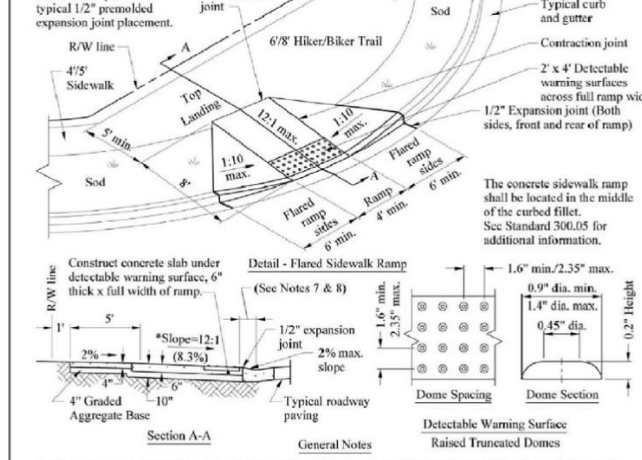

1. All new concrete sidewalks, ramps, and depressed curbs constructed within the County right-of-way shall comply with the Federal accessibility guidelines of the Americans with Disabilities Act. See Standard 300.01 for depressed curb requirements.
2. All sidewalks, ramps, and depressed curbs shall be designed and constructed so that water will not accumulate on walking surfaces.
3. The sidewalk ramp shall be constructed with the base parallel to the curb, and to a depth of 12 inches.
4. All concrete shall be Class 1 (MSHA No. 1) or equivalent, unless otherwise approved by the Department. The concrete shall be placed in 12-inch lifts.
5. The concrete shall be placed in 12-inch lifts.
6. The concrete shall be placed in 12-inch lifts.
7. The concrete shall be placed in 12-inch lifts.
8. The concrete shall be placed in 12-inch lifts.
9. The concrete shall be placed in 12-inch lifts.
10. The concrete shall be placed in 12-inch lifts.

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
CONCRETE SIDEWALK RAMP TYPE A	300.07	Concrete Sidewalk Ramp Type "A"

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

GRAPHIC SCALE — 1" = 100'