



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO. DATE DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.476 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.63	209.63	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab · B: basement · FF: finished floor · SF: subfloor · HT: height · STY: storerooms. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES


- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	

IF REQUIRED, NOTES DO NOT FIT THIS SHEET; GRADING CERTIFICATE; STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE. THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.

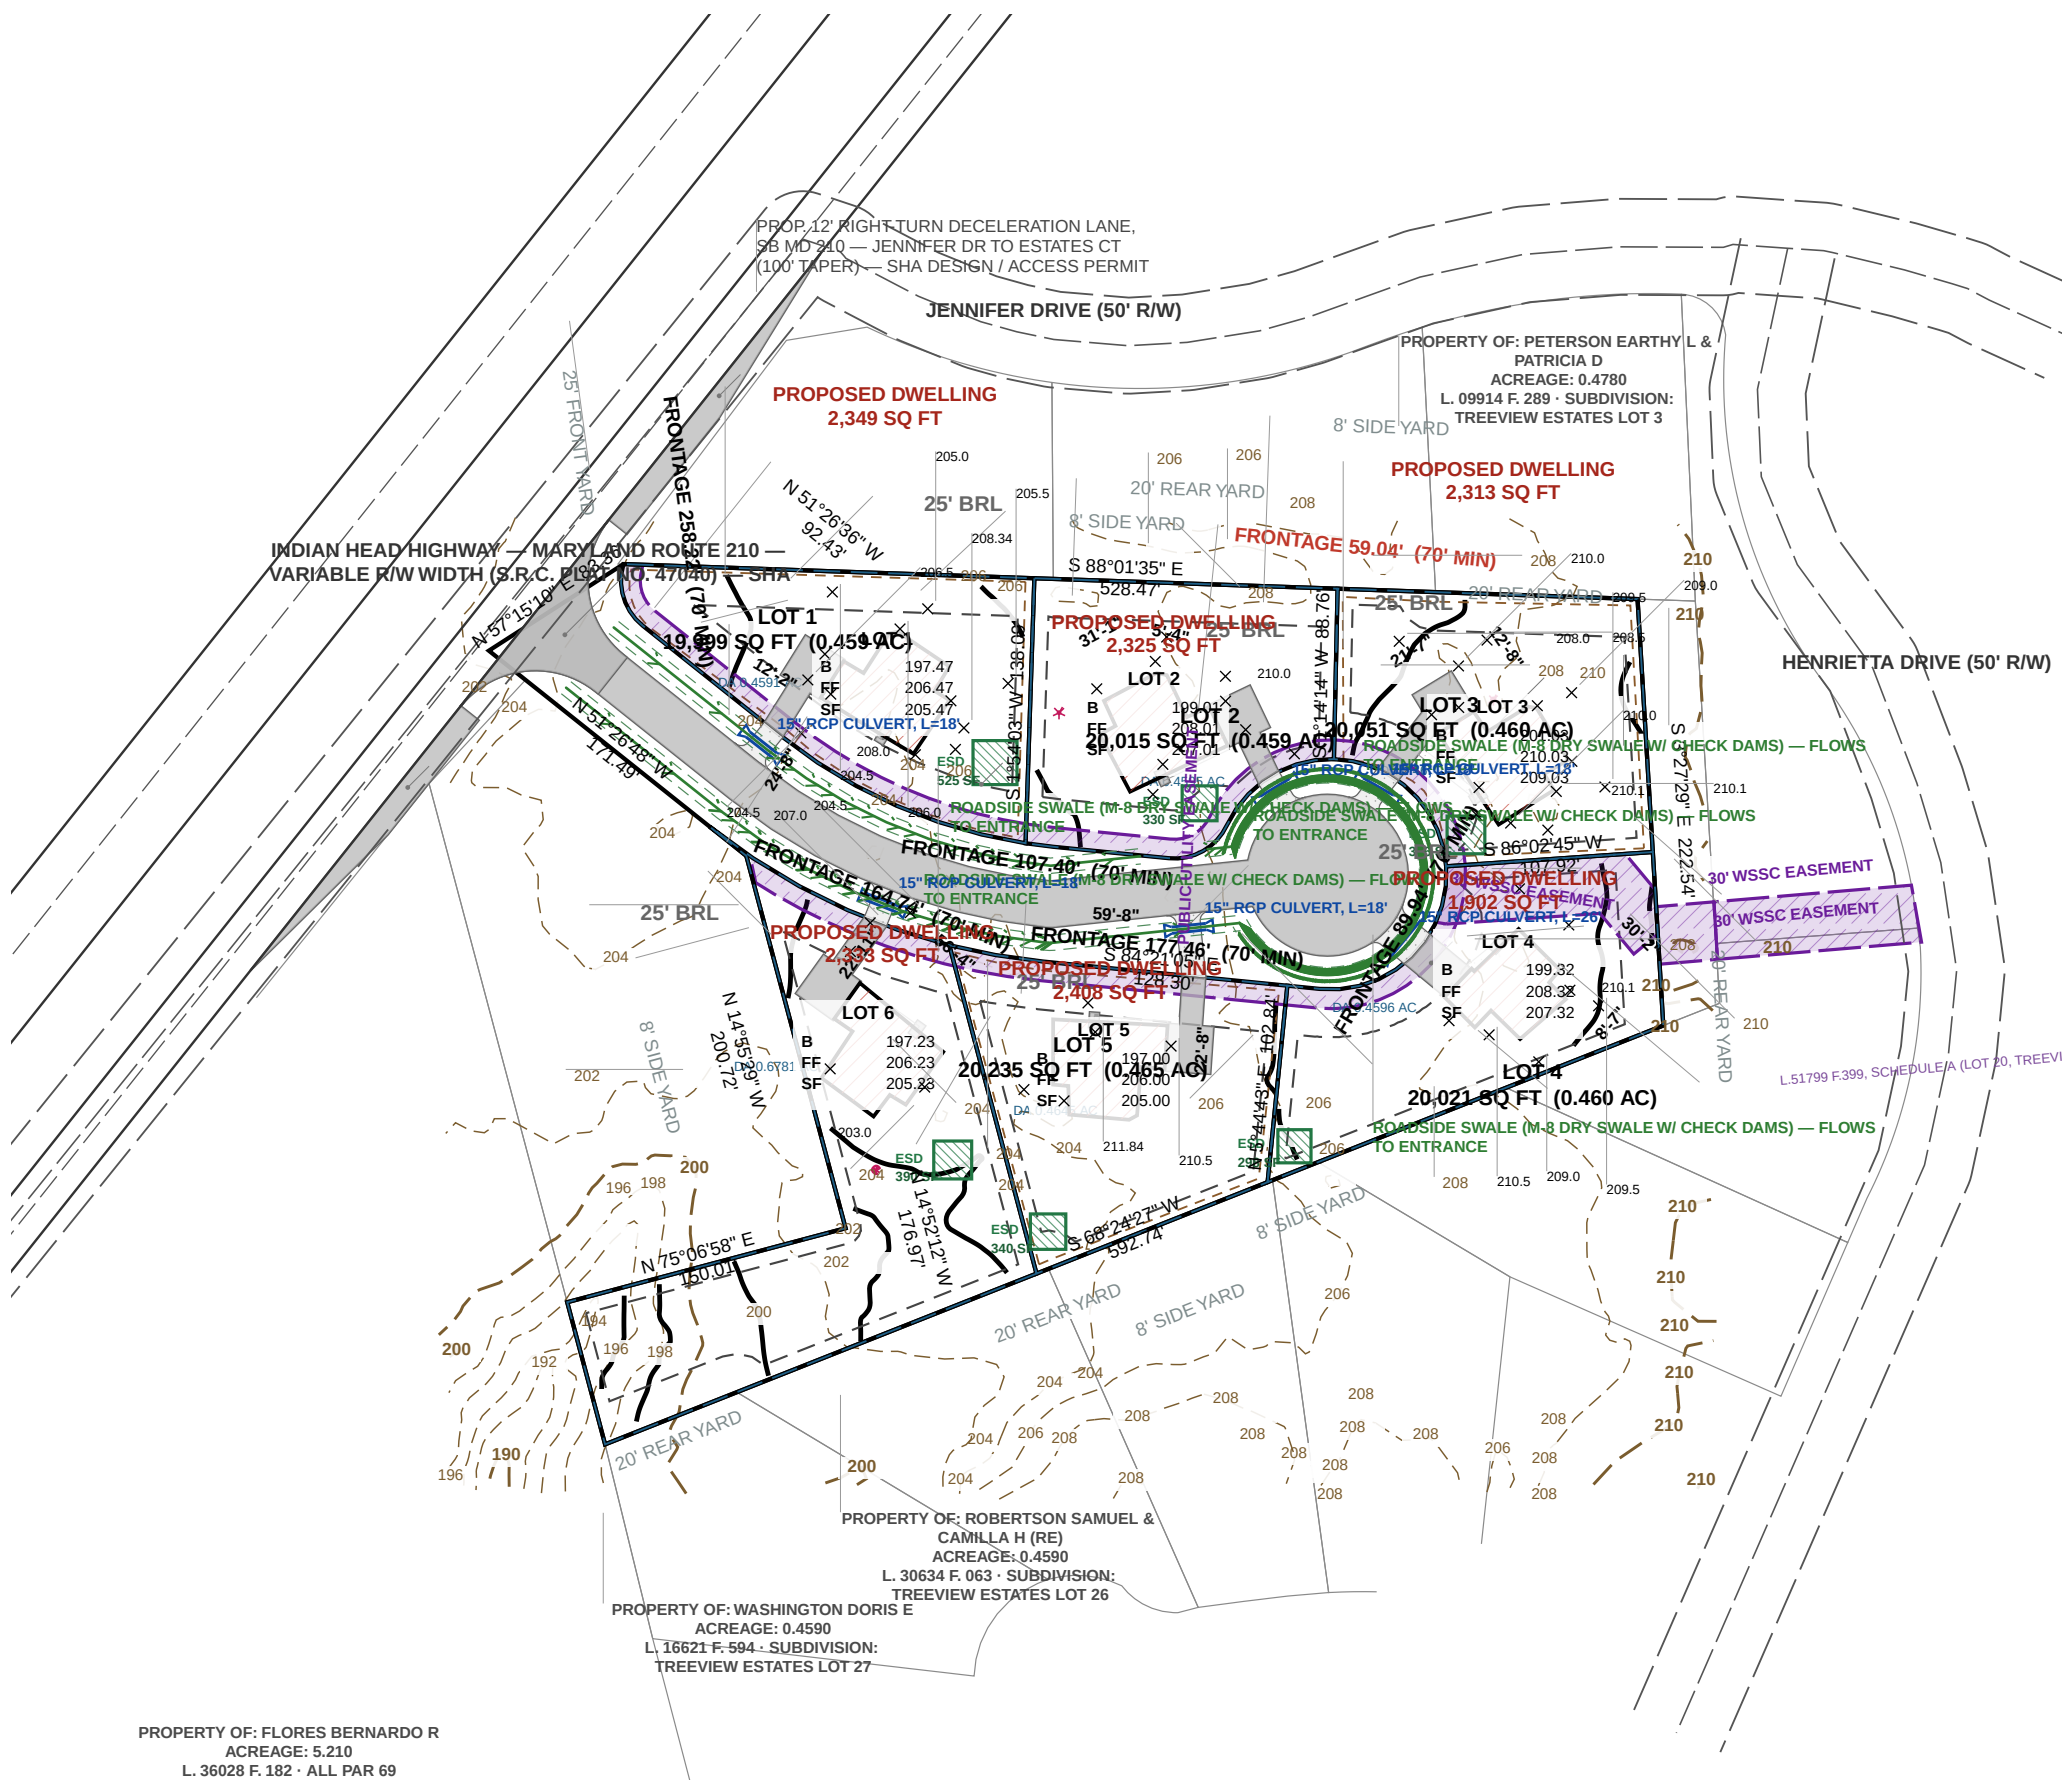


SOILS TABLE

USDA NRCS SSURGO — PGC Code Sec. 32-133(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASB	Adelphia silt loam, 2 to 5 percent slopes complex	.37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	.43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained


STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

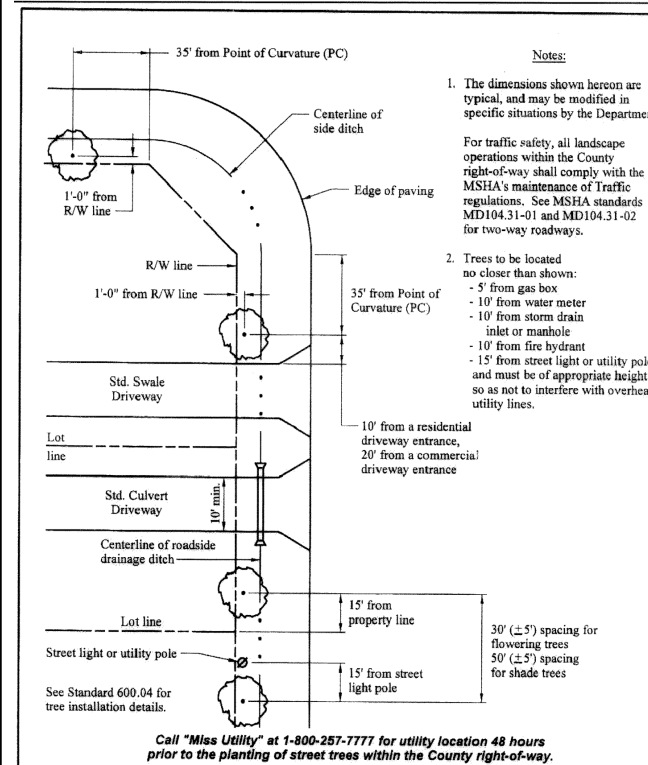

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
REVIEW DATE	APPROVED BY	Prince George's County, MD
		Street Tree Placement in Rural R/W
		600.02

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.


STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

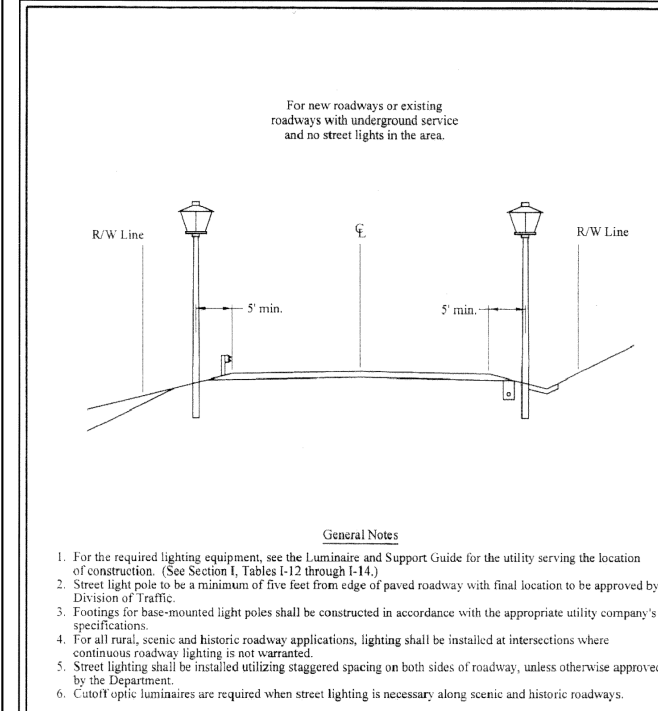

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
REVIEW DATE	APPROVED BY	Prince George's County, MD
		Street Light Location in Rural R/W
		600.10


REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

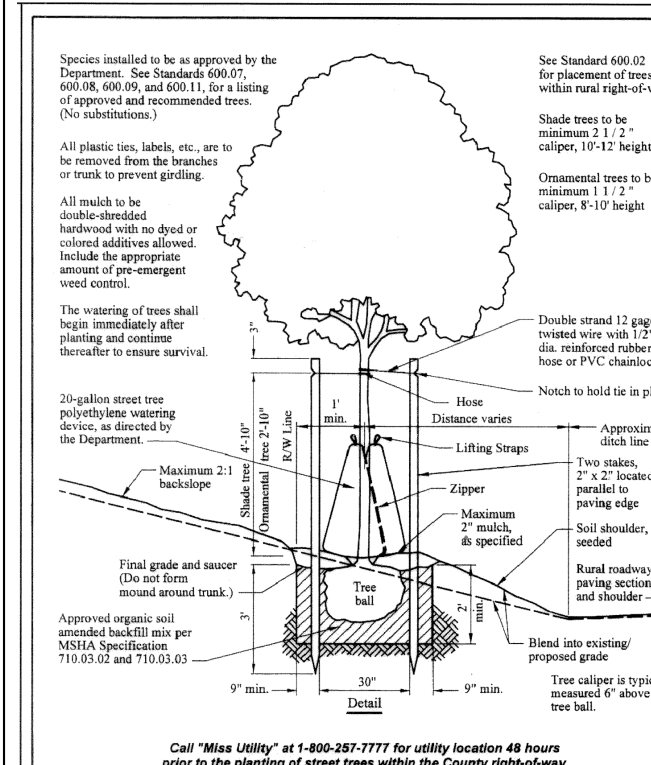

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
REVIEW DATE	APPROVED BY	Prince George's County, MD
		Street Tree Installation in Rural R/W
		600.04

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.





KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-700 — Sediment and Erosion Control Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-700 — Sediment and Erosion Control Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-100 Existing Conditions and Boundary Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-700 Sediment and Erosion Control Plan
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	20,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	206.70	200.63	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	206.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G: garage slab · B: basement · FF: finished floor · SF: subfloor · HT: height · STY: storeys · A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.8%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	20,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed for catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION; FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 226 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220SE01 — TRANSCRIBED AND CHECKED FOR CLOSURE; THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED; THE STREET IS A RURAL OPEN SECTION; EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.


SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
REQUIRED NOTE(S) DO NOT FIT THIS SHEET: STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE. THEY ARE REQUIRED AND ARE NOT ON ANY SHEET IN THIS SET.	

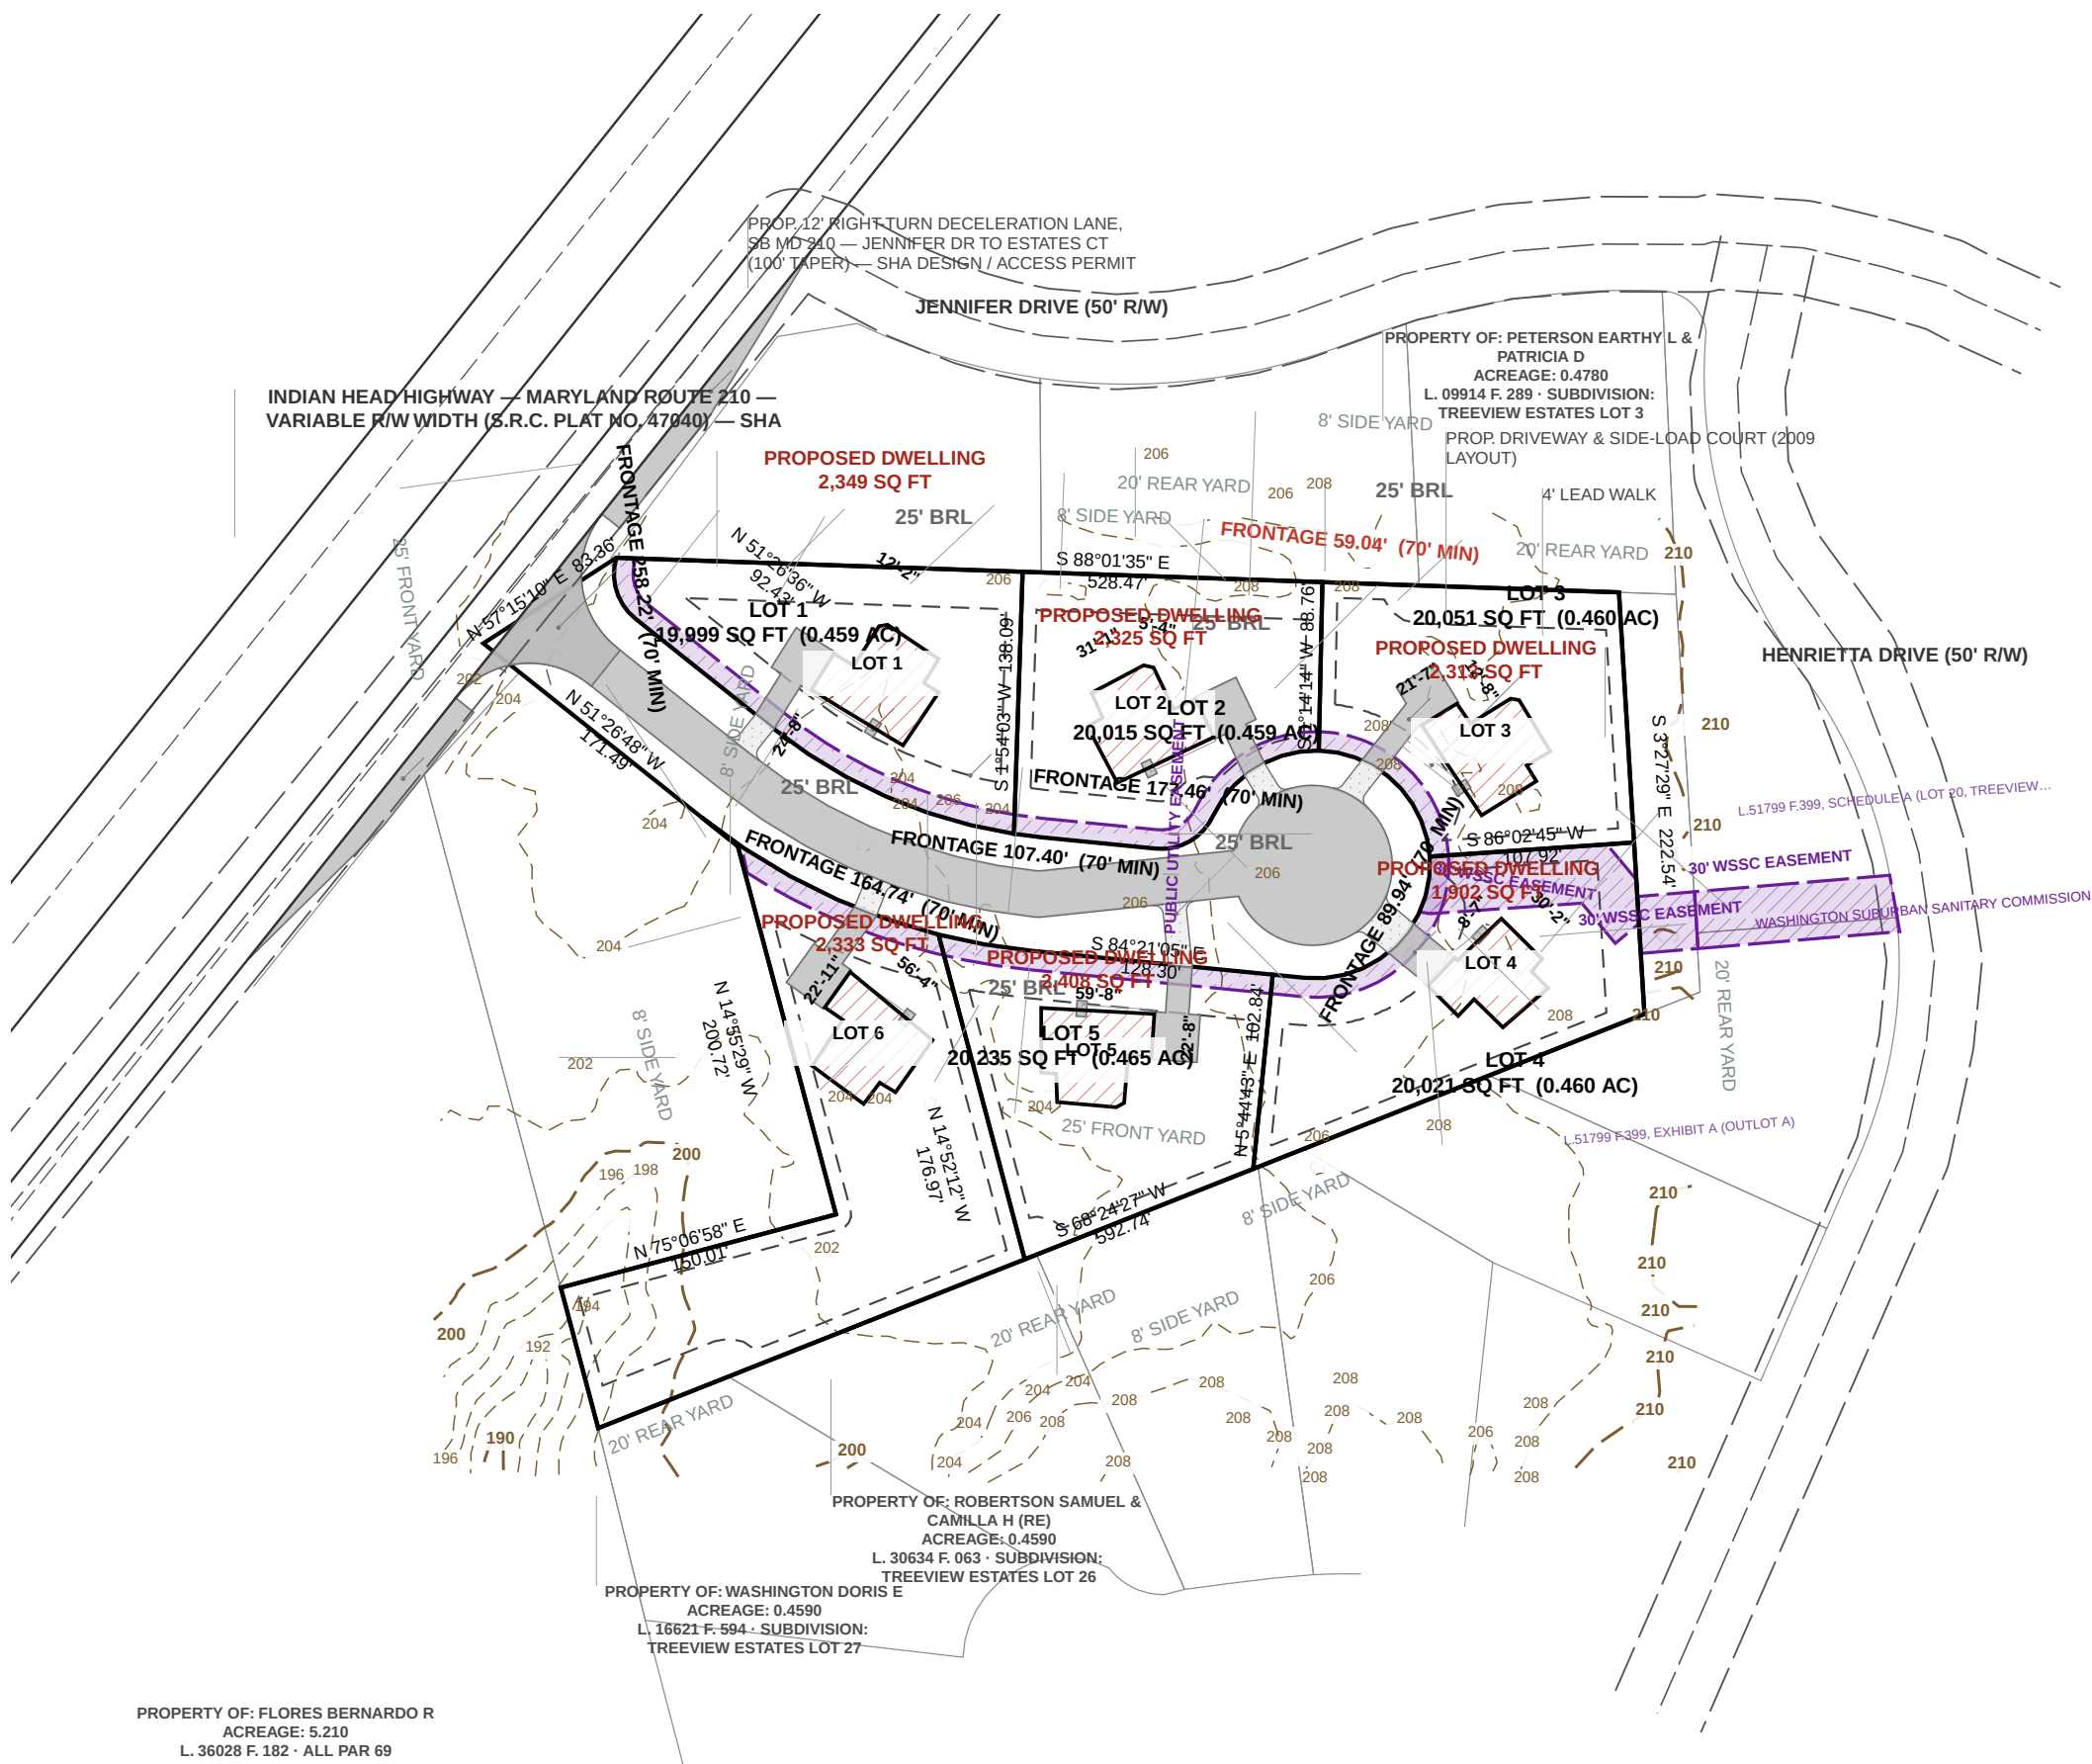


SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	.37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	.43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained

STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

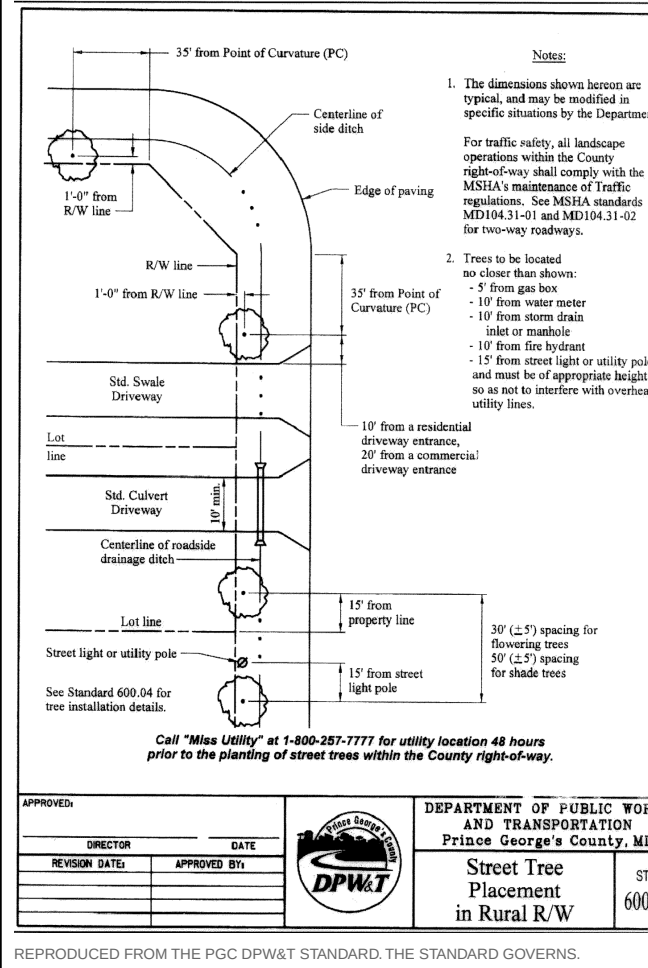

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

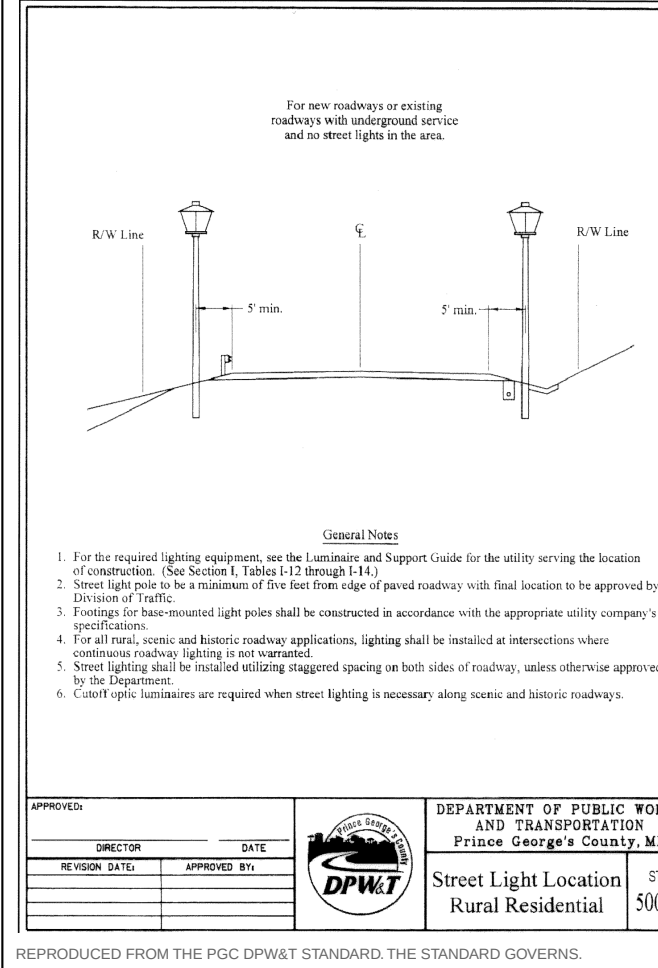

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

