



KEALEE

Design, build, deliver

PROJECT
625 IRVIN AVE
ADDRESS
625 IRVIN AVE
JURISDICTION
Anne Arundel County, Maryland
ZONE
R5
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
1 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Maryland Licensed Surveyor
certifies: boundary_determination, topographic_survey

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-100 — Existing Conditions and Boundary Plan
DISCIPLINE Maryland Licensed Surveyor
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R5
TAX / PARCEL ID	759707033800
GROSS TRACT AREA	6,070 SF 0.139 AC
LOT FRONTAGE	— 98.88'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	7' 7'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 9.3%
BUILDING FOOTPRINT	— 567 SF
DATUM	CONFIRM WITH ANNE ARUNDEL COUNTY
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	6,070 SF
2. Area of dwelling	567 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	6,070 SF
6. TOTAL AREA DISTURBED	5,750 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH ANNE ARUNDEL COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
625 IRVIN AVE	—	—	—	—	20'	2

G: garage slab - B: basement - FF: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 15.6% impervious	6,070	0.139	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	6,070	0.25	0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	567	0.05	0.05
Driveway and on-lot paving	393	0.05	0.05
Pervious — lawn	5,110	0.25	0.25
Composite C			0.361
Flow path	162 ft		162 ft
Flow path slope	2.5 %		2.5 %
Time of concentration (Kirpich)	5.0 min		5.0 min
Rainfall intensity, 10-yr	6.71 in/hr		6.71 in/hr
Peak discharge PRE, Q = CIA	0.23 cfs		0.23 cfs
Peak discharge POST, Q = CIA	0.34 cfs		0.34 cfs
INCREASE TO BE MANAGED	0.11 cfs		0.11 cfs
Rv = 0.05 + 0.0091	0.1023		0.1023
Water quality volume WQv	97 cf		97 cf

Time of concentration by Kirpich over a 162 ft flow path at 2.5%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.7710 N 76.5547 W.
Water quality volume on a 1.0 in rainfall, Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER ANNE ARUNDEL COUNTY STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —

SOILS TABLE — USDA NRCS SSURGO

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP.	DRAINAGE CLASS
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel-Urban land complex, 0 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Anne Arundel County — parcels (SDAT assessment) — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 20'

0 20 40 60 80 FEET



KEALEE

Design, build, deliver

PROJECT
625 IRVIN AVE
ADDRESS
625 IRVIN AVE
JURISDICTION
Anne Arundel County, Maryland
ZONE
R5
SHEET
C-200 — Overall Site and Zoning Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Maryland Professional Engineer
certifies: site, layout

SEAL AND SIGNATURE

Architect
certifies: architectural_footprint

SEAL AND SIGNATURE

This sheet carries content from more than one professional discipline. Each seal below applies only to the subjects listed beside it. No professional certifies content outside their stated scope, and the sheet is not divided into separate drawings for that purpose.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-200 — Overall Site and Zoning Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA	
ZONE	R5
TAX / PARCEL ID	759707033800
GROSS TRACT AREA	6,070 SF 0.139 AC
LOT FRONTAGE	98.88'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	7' 7'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 9.3%
BUILDING FOOTPRINT	567 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	6,070 SF
2. Area of dwelling	567 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	6,070 SF
6. TOTAL AREA DISTURBED	5,750 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH ANNE ARUNDEL COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
625 IRVIN AVE	—	—	—	—	20'	2

G: garage slab · B: basement · FF: finished floor · SF: subfloor · HT: height · STY: storeys · A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 15.8% impervious	6,070	0.139	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	6,070		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	567		0.95
Driveway and on-lot paving	393		0.95
Pervious — lawn	5,110		0.25
Composite C			0.361
Flow path			162 ft
Flow path slope			2.5 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.71 in/hr
Peak discharge PHE, Q = CIA			0.23 cfs
Peak discharge POST, Q = CIA			0.34 cfs
INCREASE TO BE MANAGED			0.11 cfs
Rv = 0.05 + 0.0081			0.1323
Water quality volume WQv			97 cf

Time of concentration by Kirpich over a 162 ft flow path at 2.5%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.7710 N 76.5647 W.
Water quality volume on a 1.0 in rainfall, Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS	

LEGEND

—	PROPERTY BOUNDARY
- - -	BRL — BUILDING RESTRICTION LINE
---	PROPOSED STRUCTURE
- - -	EXISTING CONTOUR — 2 FT INTERVAL, NAVD88
---	PROPOSED CONTOUR — 2 FT INTERVAL
---	STREET CENTRELINE
---	PROPOSED PAVEMENT — DRIVEWAY / WALK
---	EASEMENT
---	SANITARY LATERAL (SHC) — HEAVIEST
---	WATER SERVICE (WNC)
---	STORM DRAIN — TRUNK, RCP
---	STORM — HOUSE CONNECTION TO TRUNK
---	DRAINAGE SWALE — INVERT AND GRADED SECTION
---	RETAINING WALL — TICKS ON THE RETAINED SIDE
---	LIMIT OF GROUND COVER — TICKS ON THE STEEP SIDE
---	ESD — STORMWATER PRACTICE

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —

SOILS TABLE — USDA NRCS SSURGO

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained
AdE	Adelphia-Holmdel-Urban land complex, 0 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Anne Arundel County — parcels (SDAT assessment) — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 20'

0 20 40 60 80 FEET



KEALEE

Design, build, deliver

PROJECT
625 IRVIN AVE
ADDRESS
625 IRVIN AVE
JURISDICTION
Anne Arundel County, Maryland
ZONE
R5
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
3 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Maryland Professional Engineer
certifies: grading_design, sediment_control, stormwater_design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R5
TAX / PARCEL ID	759707033800
GROSS TRACT AREA	6,070 SF 0.139 AC
LOT FRONTAGE	— 98.88'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	7' 7'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 9.3%
BUILDING FOOTPRINT	— 567 SF
DATUM	CONFIRM WITH ANNE ARUNDEL COUNTY
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	6,070 SF
2. Area of dwelling	567 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	6,070 SF
6. TOTAL AREA DISTURBED	5,750 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH ANNE ARUNDEL COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
625 IRVIN AVE	—	—	—	—	20'	2

G: garage slab - B: basement - FF: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 15.6% impervious	6,070	0.139	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	6,070	0.25	0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	567	0.05	0.05
Driveway and on-lot paving	393	0.05	0.05
Pervious — lawn	5,110	0.25	0.25
Composite C			0.361
Flow path	162 ft		162 ft
Flow path slope	2.5 %		2.5 %
Time of concentration (Kirpich)	5.0 min		5.0 min
Rainfall intensity, 10-yr	6.71 in/hr		6.71 in/hr
Peak discharge PRE, Q = CIA	0.23 cfs		0.23 cfs
Peak discharge POST, Q = CIA	0.34 cfs		0.34 cfs
INCREASE TO BE MANAGED	0.11 cfs		0.11 cfs
Rv = 0.05 + 0.0091	0.1023		0.1023
Water quality volume WQv	97 cf		97 cf

Time of concentration by Kirpich over a 162 ft flow path at 2.5%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 3, PFDS point estimate, 38.7710 N 76.5547 W.
Water quality volume on a 1.0 in rainfall, Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER ANNE ARUNDEL COUNTY STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —

SOILS TABLE — USDA NRCS SSURGO

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GRP.	DRAINAGE CLASS
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel-Urban land complex, 0 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Anne Arundel County — parcels (SDAT assessment) — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 20'





KEALEE

Design, build, deliver

PROJECT
625 IRVIN AVE
ADDRESS
625 IRVIN AVE
JURISDICTION
Anne Arundel County, Maryland
ZONE
R5
SHEET
C-500 — Utility Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
4 OF 5
COORDINATES
EPSG-2248
H: NAD83
V: NAVD88 (feet)
PROFESSIONAL RESPONSIBILITY
Maryland Professional Engineer
certifies: Utility_Design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLAN TYPE	SITE DEVELOPMENT / FINE GRADING
SHEET	C-500 — Utility Plan
DISCIPLINE	Maryland Professional Engineer
DRAWN BY	KEALEE SITE-PLAN ENGINE
DESIGNED BY	
CHECKED BY	

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R5
TAX / PARCEL ID	759707033800
GROSS TRACT AREA	6,070 SF 0.139 AC
LOT FRONTAGE	— 98.88'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	7' 7'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 9.3%
BUILDING FOOTPRINT	— 567 SF
DATUM	
HORIZONTAL	EPSG-2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	6,070 SF
2. Area of dwelling	567 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	6,070 SF
6. TOTAL AREA DISTURBED	5,750 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH ANNE ARUNDEL COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
625 IRVIN AVE	—	—	—	—	20'	2

G: garage slab; B: basement; FF: finished floor; SF: subfloor; HT: height; STY: storeys. A DASH IS NOT ZERO; the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 15.6% impervious	6,070	0.139	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	6,070		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	567		0.95
Driveway and on-lot paving	393		0.95
Pervious — lawn	5,110		0.25
Composite C			0.361
Flow path			162 ft
Flow path slope			2.5 %
Time of concentration (Kirpich)			5.0 min
Rainfall intensity, 10-yr			6.71 in/hr
Peak discharge PRE, Q = CIA			0.23 cfs
Peak discharge POST, Q = CIA			0.34 cfs
INCREASE TO BE MANAGED			0.11 cfs
Rv = 0.05 + 0.0091			0.1923
Water quality volume WQv			97 cf

Time of concentration by Kirpich over a 162 ft flow path at 2.5%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.7710 N 76.5547 W.
Water quality volume on a 1.0 in rainfall, Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER ANNE ARUNDEL COUNTY STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE

DATE

SEAL

LICENSE NO.

EXPIRATION DATE

REVISIONS

— NONE —


SOILS TABLE — USDA NRCS SSURGO

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GRP.	DRAINAGE CLASS
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel-Urban land complex, 0 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Anne Arundel County — parcels (SDAT assessment) — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 20'



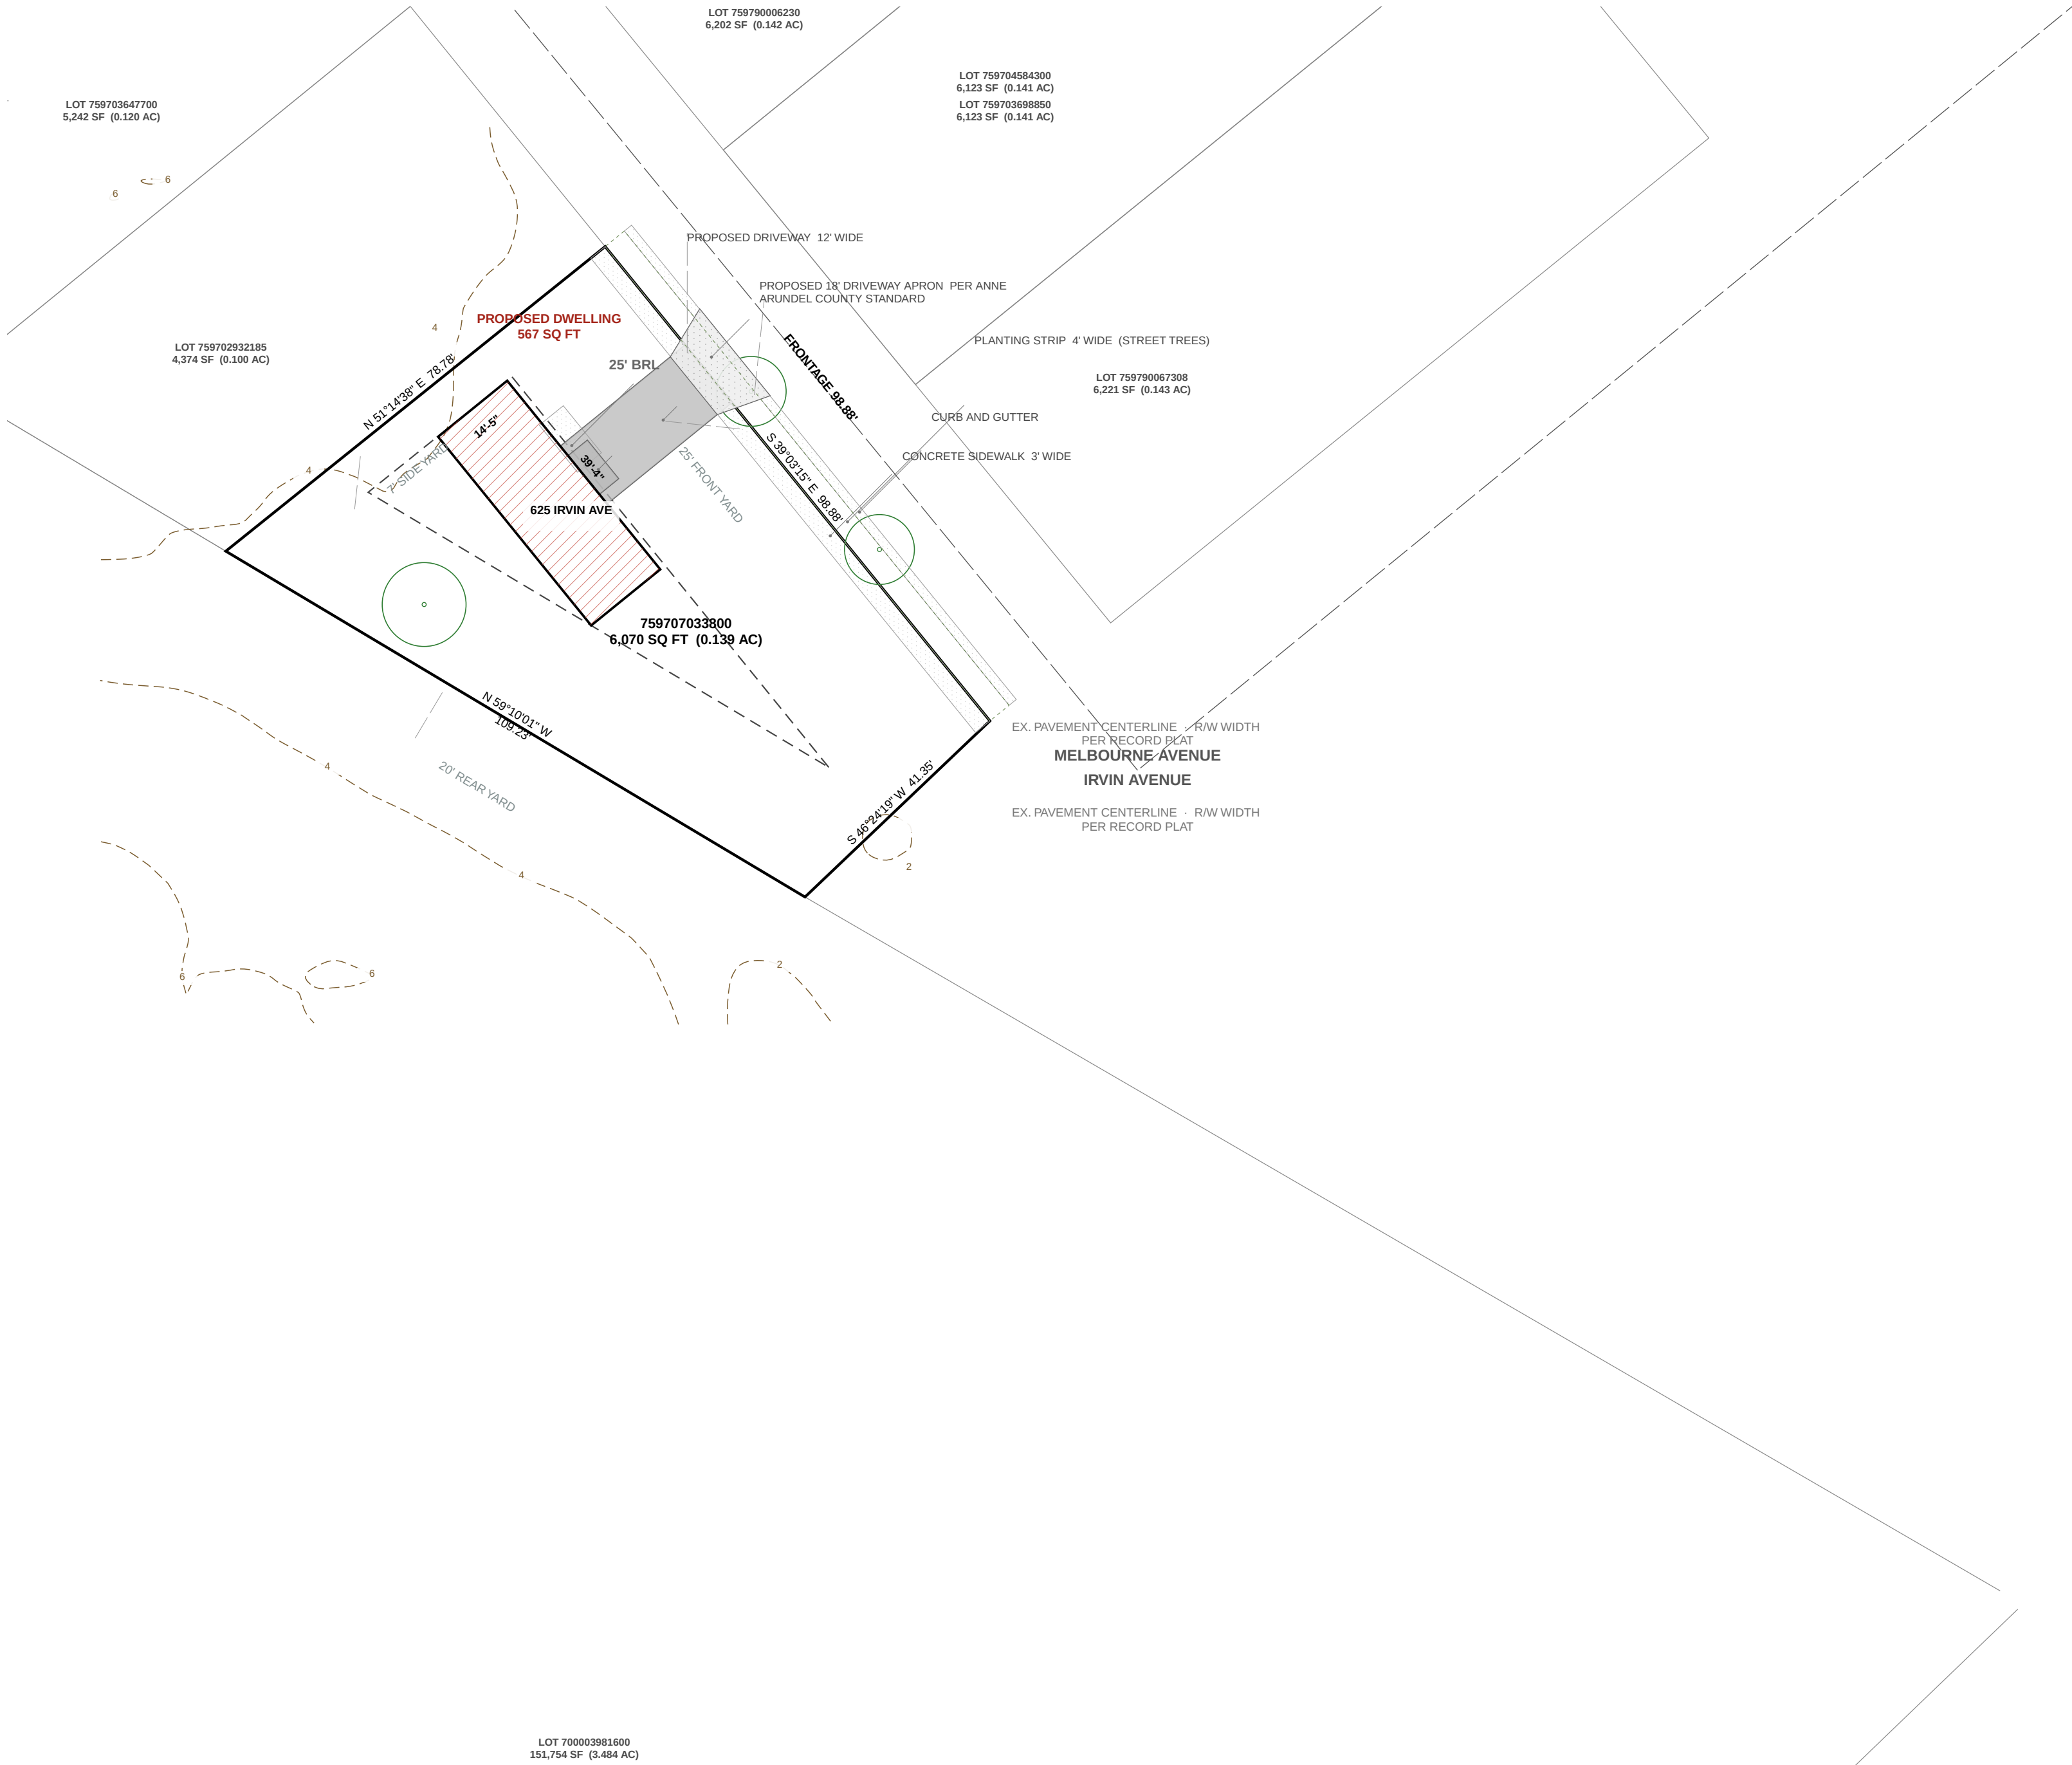

KEALEE

Design, build, deliver

PROJECT
625 IRVIN AVE
ADDRESS
625 IRVIN AVE
JURISDICTION
Anne Arundel County, Maryland
ZONE
R5
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 20'
STATUS
PRELIMINARY
SHEET NO.
5 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Qualified Environmental Professional
certifies: tree_conservation

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

PLAN TYPE AND PREPARATION

PLANTYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

SITE DATA

ZONE	R5
TAX / PARCEL ID	759707033800
GROSS TRACT AREA	6,070 SF 0.139 AC
LOT FRONTAGE	— 98.88'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	7' 7'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	40% 9.3%
BUILDING FOOTPRINT	— 567 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	6,070 SF
2. Area of dwelling	567 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	6,070 SF
6. TOTAL AREA DISTURBED	5,750 SF (AT LEAST)
7. SWM REVIEW	CONFIRM WITH ANNE ARUNDEL COUNTY

BUILDING DATA

	G	B	FF	SF	HT	STY
625 IRVIN AVE	—	—	—	—	20'	2

G: garage slab - B: basement - FF: finished floor - SF: subfloor - HT: height - STY: storeys. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	SF	ACRES	C
Total — 15.6% impervious	6,070	0.139	
PRE-DEVELOPMENT	SF		C
Pervious — lawn / meadow	6,070		0.25
Composite C			0.250
POST-DEVELOPMENT	SF		C
Proposed roof	567		0.95
Driveway and on-lot paving	393		0.95
Pervious — lawn	5,110		0.25
Composite C			0.361
Flow path	162 ft		
Flow path slope	2.5 %		
Time of concentration (Kirpich)	5.0 min		
Rainfall intensity, 10-yr	6.71 in/hr		
Peak discharge PRE, Q = CIA	0.23 cfs		
Peak discharge POST, Q = CIA	0.34 cfs		
INCREASE TO BE MANAGED	0.11 cfs		
Rv = 0.05 + 0.0091	0.1023		
Water quality volume WQv	97 cf		

Time of concentration by Kirpich over a 162 ft flow path at 2.5%, taken from the 2 ft contours across the catchment. A 5-minute floor applies.
Rainfall intensity 6.71 in/hr for the 10-year storm at a 5.0 minute duration, NOAA Atlas 14 Vol. 2 Ver. 3, PFDS point estimate, 38.7710 N 76.5647 W.
Water quality volume on a 1.0 in rainfall, Maryland Stormwater Design Manual, Vol. 1 & 2 — WQv on a 1.0 in rainfall.
Runoff coefficients: roof and pavement 0.95, average lawn 0.25. Confirm the lawn coefficient against the soil hydrologic group before relying on the composite.
Sidewalk, curb and gutter and the driveway apron lie in the public right-of-way and drain to the street. They are excluded from the lot catchment and included in the disturbed areas.

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Install stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade the lot	5 DAYS
6. Construct dwelling	6 MONTHS
7. Install water, sewer and storm services and the driveway	10 DAYS
8. Fine grade and stabilize all disturbed areas	5 DAYS
9. Remove sediment control once the inspector gives written permission	1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- EXISTING UTILITIES ARE SHOWN FROM PUBLIC RECORD AND ARE APPROXIMATE. LOCATION AND DEPTH SHALL BE FIELD-VERIFIED BY TEST PIT BEFORE CONSTRUCTION.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.
- CONNECT TO EXISTING PAVEMENT, CURB AND GUTTER, DRIVEWAY AND SIDEWALK IN LINE AND GRADE.
- NO DRIVEWAY CULVERT IS REQUIRED. THIS FRONTAGE IS AN EXISTING CURB AND GUTTER SECTION, NOT AN OPEN DITCH SECTION. GUTTER FLOW IS CARRIED THROUGH EACH ENTRANCE BY THE DEPRESSED CURB AT THE APRON PER ANNE ARUNDEL COUNTY STANDARD. ON-LOT DRAINAGE IS COLLECTED BY THE REAR-YARD SWALE IN THE REAR DRAINAGE EASEMENT AND CROSSES NO DRIVEWAY OR APRON.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
SEAL	EXPIRATION DATE
LICENSE NO.	

REVISIONS

— NONE —

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Anne Arundel County — parcels (SDAT assessment) — level 1
Existing contours — U.S. Geological Survey — 3D Elevation Program — 3DEP bare-earth DEM —...

GRAPHIC SCALE — 1" = 20'

