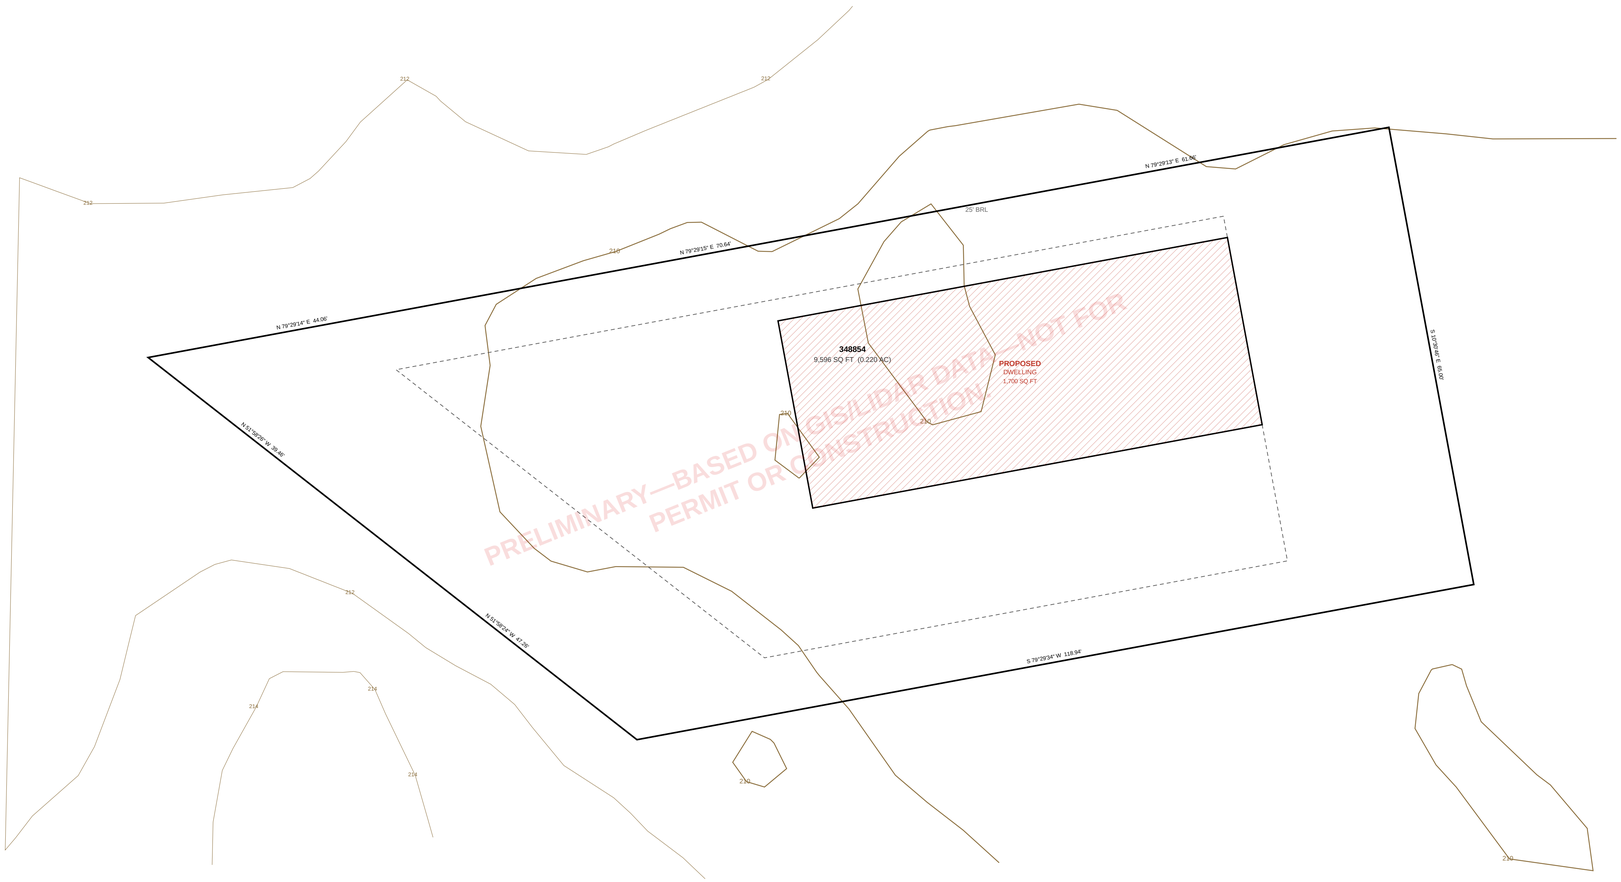


SOILS TABLE

USDA NRCS SSURGO — required by PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GROUP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	.37	No	C	Moderately well drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	.43	No	D	Somewhat poorly drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	.37	No	C	Moderately well drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	.37	No	C	Moderately well drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	.37	No	C	Moderately well drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained

SOURCE AND ACCURACY
Parcel boundary — jurisdiction gis — Prince George's County / M-NCPPC — PGAtlas Property — level 1
Existing contours — Prince George's County / M-NCPPC — PGAtlas — level 1
Contours: PGAtlas Elevation/MapServer/1 — Contour - 2 Ft (2023), 2 ft interval, NAVD88 (feet)

GRAPHIC SCALE — 1" = 10'

0 10 20 30 40 FEET

KEALEE

design, build, deliver

PROJECT
1005 Rollins Ave

ADDRESS
1005 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-200 — Overall Site and Zoning Plan

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
1 OF 1

COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY

Maryland Licensed Surveyor
certifies: boundary_determination, topographic_survey

SEAL AND SIGNATURE

Maryland Professional Engineer
certifies: site_layout

SEAL AND SIGNATURE

Architect
certifies: architectural_footprint

SEAL AND SIGNATURE

This sheet carries content from more than one professional discipline. Each seal below applies only to the subjects listed beside it. No professional certifies content outside their stated scope, and the sheet is not divided into separate drawings for that purpose.

SITE DATA

ZONE	RSF-65	
TAX / PARCEL ID	348854	
GROSS LOT AREA	9,596 SF	0.220 AC
SETBACKS	**REQUIRED**	**PROVIDED**
FRONT YARD	25'	25'
SIDE YARD	8'	8'
REAR YARD	20'	20'
COVERAGE	**MAX**	**PROPOSED**
LOT COVERAGE	35%	17.7%
BUILDING FOOTPRINT	---	1,700 SF
DATUM		
HORIZONTAL	EPSG:2248	NAD83
VERTICAL	NAVD88 (feet)	

SITE ANALYSIS

1. Gross tract area	9,596 SF
2. Area of dwelling	1,700 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	9,596 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	**1 DAY**
2. Obtain necessary permits	**2 DAYS**
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	**1 DAY**
4. Construct stabilized construction entrance and perimeter sediment control	**2 DAYS**
5. Rough grade; construct dwelling, utilities and driveway	**12 MONTHS**
6. Fine grade and stabilize all disturbed areas	**1 DAY**
7. Remove sediment control devices when written permission has been granted by the inspector	**1 DAY**

TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

LEGEND

- PROPERTY BOUNDARY
- BRL — BUILDING RESTRICTION LINE
- PROPOSED STRUCTURE
- EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD88
- EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPIE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

GRADING CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE REQUIREMENTS OF SUBTITLE 32, DIVISION 2 OF THE CODE OF PRINCE GEORGE'S COUNTY WATER RESOURCES PROTECTION AND GRADING CODE; AND THAT I OR MY STAFF HAVE INSPECTED THIS SITE AND THAT DRAINAGE FLOWS FROM UPHILL PROPERTIES ONTO THIS SITE, AND FROM THIS SITE ONTO DOWNHILL PROPERTIES, HAVE BEEN ADDRESSED IN SUBSTANTIAL ACCORDANCE WITH APPLICABLE CODES. SIGNED, SEALED AND DATED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF MARYLAND.

Prince George's County DPIE, Site Rough Grading Design Review Checklist, item A-10

STABILIZATION COMPLIANCE PREAMBLE

Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.01 by January 9, 2013, regardless of when an erosion and sediment control plan was approved.

COMAR 26.17.01.08G(3), Grandfathering of approved plans

STANDARD STABILIZATION NOTE

Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within: a.) Three (3) calendar days as to the surface of all perimeter dikes, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1); and b.) Seven (7) calendar days as to all other disturbed or graded areas on the project site not under active grading.

2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01.09A(1))

REVISIONS
— none —