



KEALEE

Design, build, deliver

PROJECT
4600 WHEELER ROAD — PRELIMINARY SUBDIVISION CONCEPT — LOTS 1–10 (proposed)

ADDRESS

4600 WHEELER ROAD

JURISDICTION
Prince George's County, Maryland

ZONE
RSF-95

SHEET
C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape

SCALE
1" = 100'

STATUS
PRELIMINARY

SHEET NO.
1 OF 3

COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING

SHEET C-001 — Site Development Plan — Existing, Proposed, Grading, Paving and Landscape

DISCIPLINE Maryland Professional Engineer / Surveyor (see divided responsibility)

DRAWN BY KEALEE SITE-PLAN ENGINE

DESIGNED BY

CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-001 Site Development Plan — Existing, Proposed, Grading, Paving and
- L-100 Landscape and Tree Canopy Plan
- C-400 Grading and Drainage Plan

SITE DATA

ZONE	RSF-95
TAX / PARCEL ID	230,997 SF
GROSS TRACT AREA	5,303 AC
LOT 1 (proposed) AREA	14,617 SF 0.336 AC
LOT 2 (proposed) AREA	10,636 SF 0.244 AC
LOT 3 (proposed) AREA	10,636 SF 0.244 AC
LOT 4 (proposed) AREA	10,636 SF 0.244 AC
LOT 5 (proposed) AREA	10,636 SF 0.244 AC
LOT 6 (proposed) AREA	10,636 SF 0.244 AC
LOT 7 (proposed) AREA	10,636 SF 0.244 AC
LOT 8 (proposed) AREA	10,636 SF 0.244 AC
LOT 9 (proposed) AREA	10,636 SF 0.244 AC
LOT 10 (proposed) AREA	11,411 SF 0.262 AC
NET LOT AREA	111,114 SF 2,551 AC
LOT 1 (proposed) FRONTAGE	50' MIN 151.94'
LOT 2 (proposed) FRONTAGE	50' MIN 75.97'
LOT 3 (proposed) FRONTAGE	50' MIN 75.97'
LOT 4 (proposed) FRONTAGE	50' MIN 75.97'
LOT 5 (proposed) FRONTAGE	50' MIN 75.97'
LOT 6 (proposed) FRONTAGE	50' MIN 75.97'
LOT 7 (proposed) FRONTAGE	50' MIN 75.97'
LOT 8 (proposed) FRONTAGE	50' MIN 75.97'
LOT 9 (proposed) FRONTAGE	50' MIN 75.97'
LOT 10 (proposed) FRONTAGE	50' MIN 151.94'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	30% 15.3%
BUILDING FOOTPRINT	— 17,000 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

- Gross tract area 230,997 SF
- Area of dwelling 17,000 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 111,114 SF
- TOTAL AREA DISTURBED 91,800 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-17(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1 (proposed)	146.81	—	147.14	146.14	20'	2
LOT 2 (proposed)	152.75	—	153.08	152.08	20'	2
LOT 3 (proposed)	158.24	—	158.57	157.57	20'	2
LOT 4 (proposed)	160.76	—	161.09	160.09	20'	2
LOT 5 (proposed)	165.66	—	165.99	164.99	20'	2
LOT 6 (proposed)	169.64	—	169.97	168.97	20'	2
LOT 7 (proposed)	175.61	—	175.94	174.94	20'	2
LOT 8 (proposed)	180.18	—	180.51	179.51	20'	2
LOT 9 (proposed)	183.77	—	182.10	181.10	20'	2
LOT 10 (proposed)	162.07	—	162.40	161.40	20'	2

G: garage slab; B: basement; FF: finished floor; SF: subfloor; HT: height; STY: stories. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

SEQUENCE OF CONSTRUCTION


- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Final grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

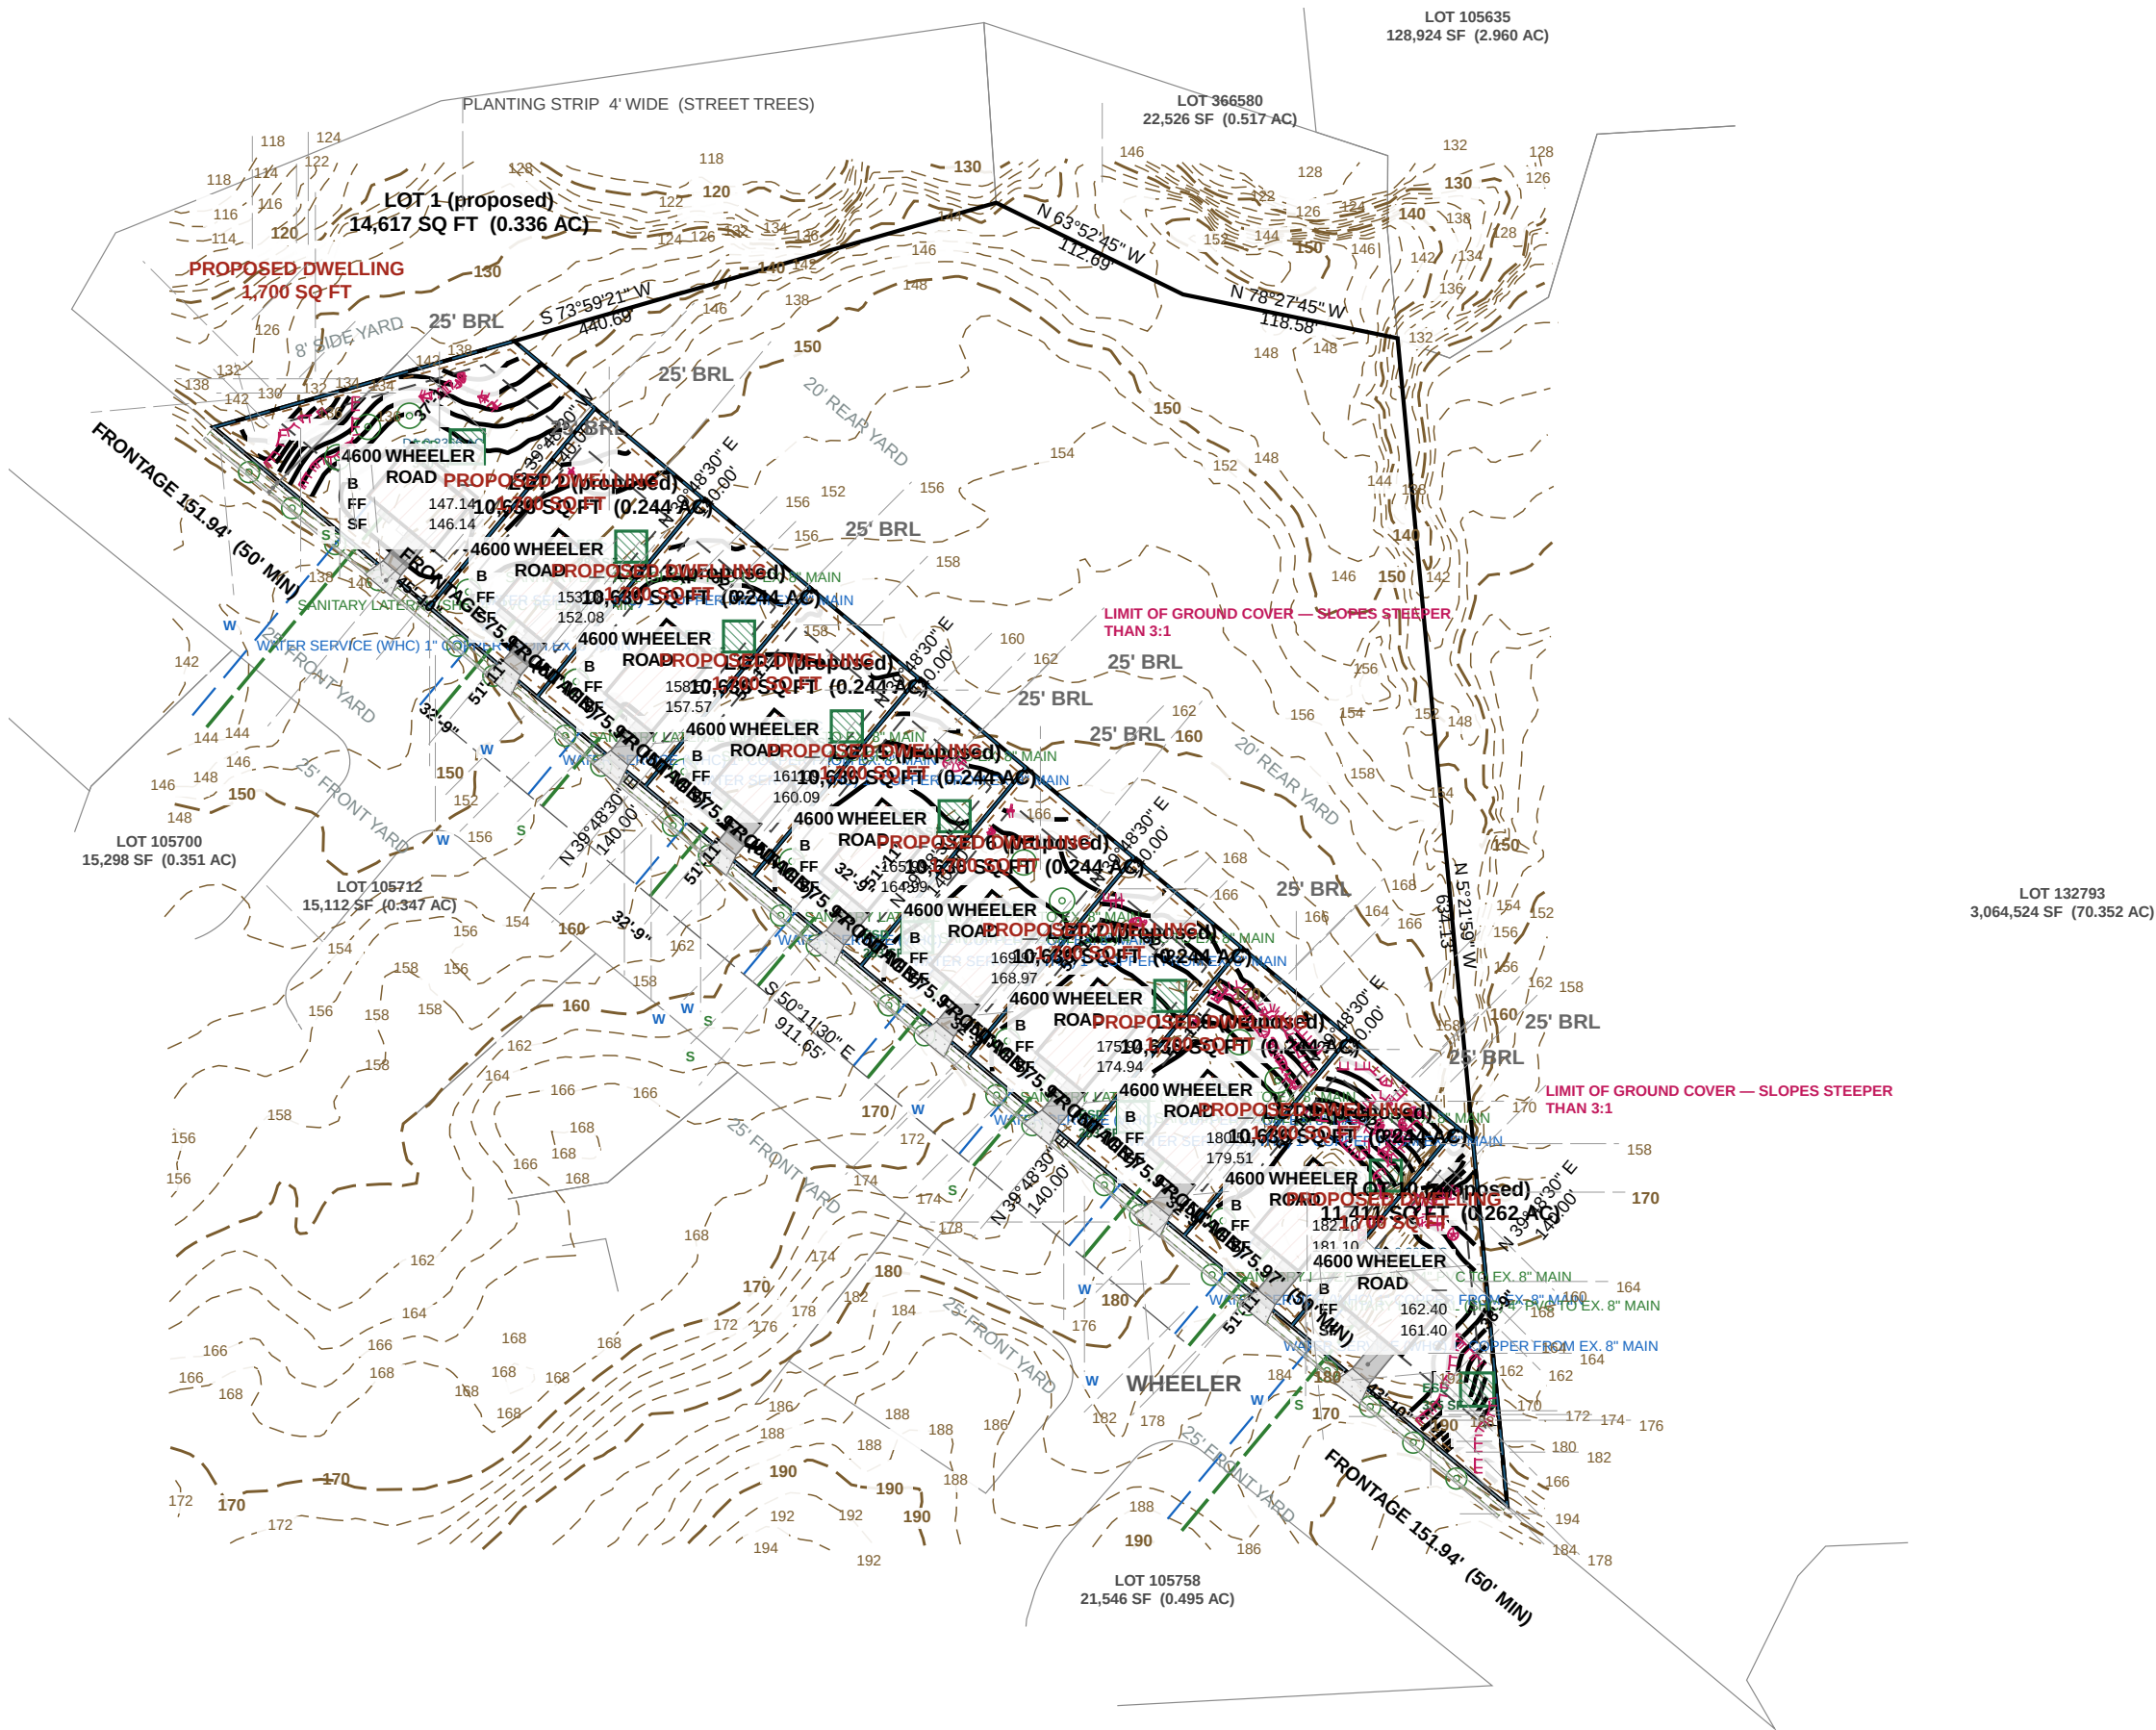


SOILS TABLE

USDA NRCS SSURGO — PGC Code Sec. 32-13X(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

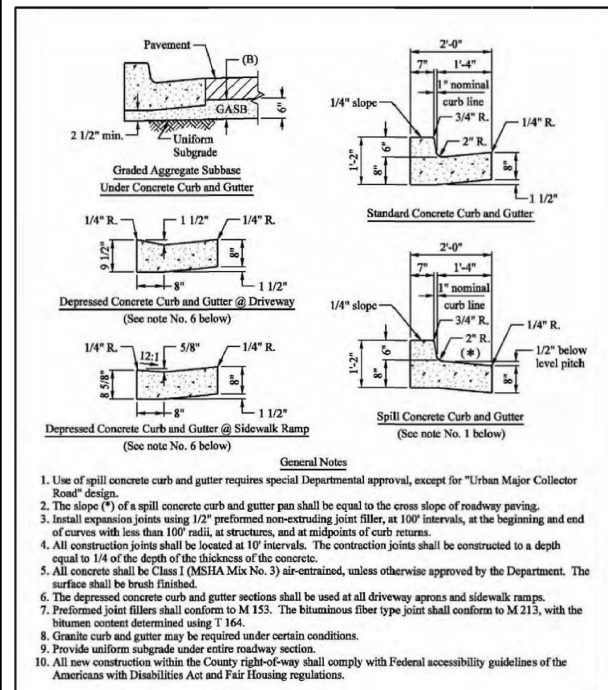


APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DESIGNED BY	APPROVED BY	Concrete Curb and Gutter
300.01		

Version 03/2012 Specification and Standards for Roadways and Bridges Section B — 61

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.

GRAPHIC SCALE — 1" = 100'

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

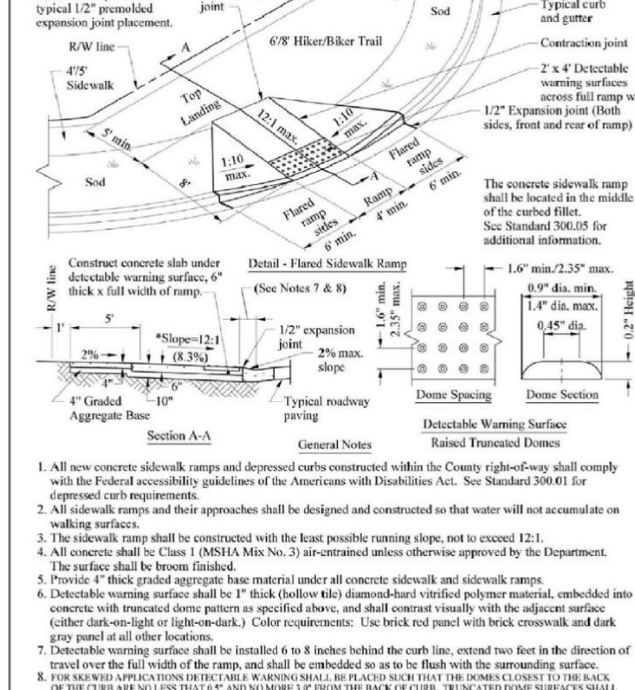

APPROVED	DATE	DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION Prince George's County, MD
DESIGNED BY	APPROVED BY	Concrete Sidewalk Ramp Type "A"
300.07		

Version 03/2012 Specification and Standards for Roadways and Bridges Section B — 11

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
4600 WHEELER ROAD — PRELIMINARY SUBDIVISION CONCEPT — LOTS 1–10 (proposed)
ADDRESS
4600 WHEELER ROAD
JURISDICTION
Prince George's County, Maryland
ZONE
RSF-95
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
2 OF 3
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO. DATE DESCRIPTION

INDEX OF DRAWINGS

1 C-011 Site Development Plan — Existing, Proposed, Grading, Paving and
2 L-100 Landscape and Tree Canopy Plan
3 C-400 Grading and Drainage Plan

SITE DATA

ZONE	RSF-95
TAX / PARCEL ID	230,997 SF
GROSS TRACT AREA	5,303 AC
LOT 1 (proposed) AREA	14,617 SF
LOT 2 (proposed) AREA	10,636 SF
LOT 3 (proposed) AREA	10,636 SF
LOT 4 (proposed) AREA	10,636 SF
LOT 5 (proposed) AREA	10,636 SF
LOT 6 (proposed) AREA	10,636 SF
LOT 7 (proposed) AREA	10,636 SF
LOT 8 (proposed) AREA	10,636 SF
LOT 9 (proposed) AREA	10,636 SF
LOT 10 (proposed) AREA	11,411 SF
NET LOT AREA	111,114 SF
NET LOT AREA	2,551 AC
LOT 1 (proposed) FRONTAGE	50' MIN
LOT 2 (proposed) FRONTAGE	50' MIN
LOT 3 (proposed) FRONTAGE	50' MIN
LOT 4 (proposed) FRONTAGE	50' MIN
LOT 5 (proposed) FRONTAGE	50' MIN
LOT 6 (proposed) FRONTAGE	50' MIN
LOT 7 (proposed) FRONTAGE	50' MIN
LOT 8 (proposed) FRONTAGE	50' MIN
LOT 9 (proposed) FRONTAGE	50' MIN
LOT 10 (proposed) FRONTAGE	50' MIN
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	15.3% 15.3%
BUILDING FOOTPRINT	17,000 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	230,997 SF
2. Area of dwelling	17,000 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	111,114 SF
6. TOTAL AREA DISTURBED	91,800 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1 (proposed)	146.81	—	147.14	146.14	20'	2
LOT 2 (proposed)	152.75	—	153.08	152.08	20'	2
LOT 3 (proposed)	158.24	—	158.57	157.57	20'	2
LOT 4 (proposed)	160.76	—	161.09	160.09	20'	2
LOT 5 (proposed)	165.66	—	165.99	164.99	20'	2
LOT 6 (proposed)	169.64	—	169.97	168.97	20'	2
LOT 7 (proposed)	175.61	—	175.94	174.94	20'	2
LOT 8 (proposed)	180.18	—	180.51	179.51	20'	2
LOT 9 (proposed)	183.77	—	184.10	183.10	20'	2
LOT 10 (proposed)	182.07	—	182.40	181.40	20'	2

G: garage slab · B: basement · FF: finished floor · SF: subfloor · HT: height · STY: stories. A DASH IS NOT ZERO: the elevation has not been established and must be set from a field-run topographic survey before construction.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1 (proposed)	14,617	14.3%	0.96	0.79	0.23	217
LOT 2 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 3 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 4 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 5 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 6 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 7 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 8 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 9 (proposed)	10,636	19.6%	0.41	0.63	0.22	201
LOT 10 (proposed)	11,411	18.4%	0.44	0.67	0.23	205
PROJECT TOTAL	111,114	18.8%	4.28	6.50	2.22	2,030

Peak flows are summed for catchments; Q in cfs; WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION


- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Final grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	
REVISIONS	
— NONE —	

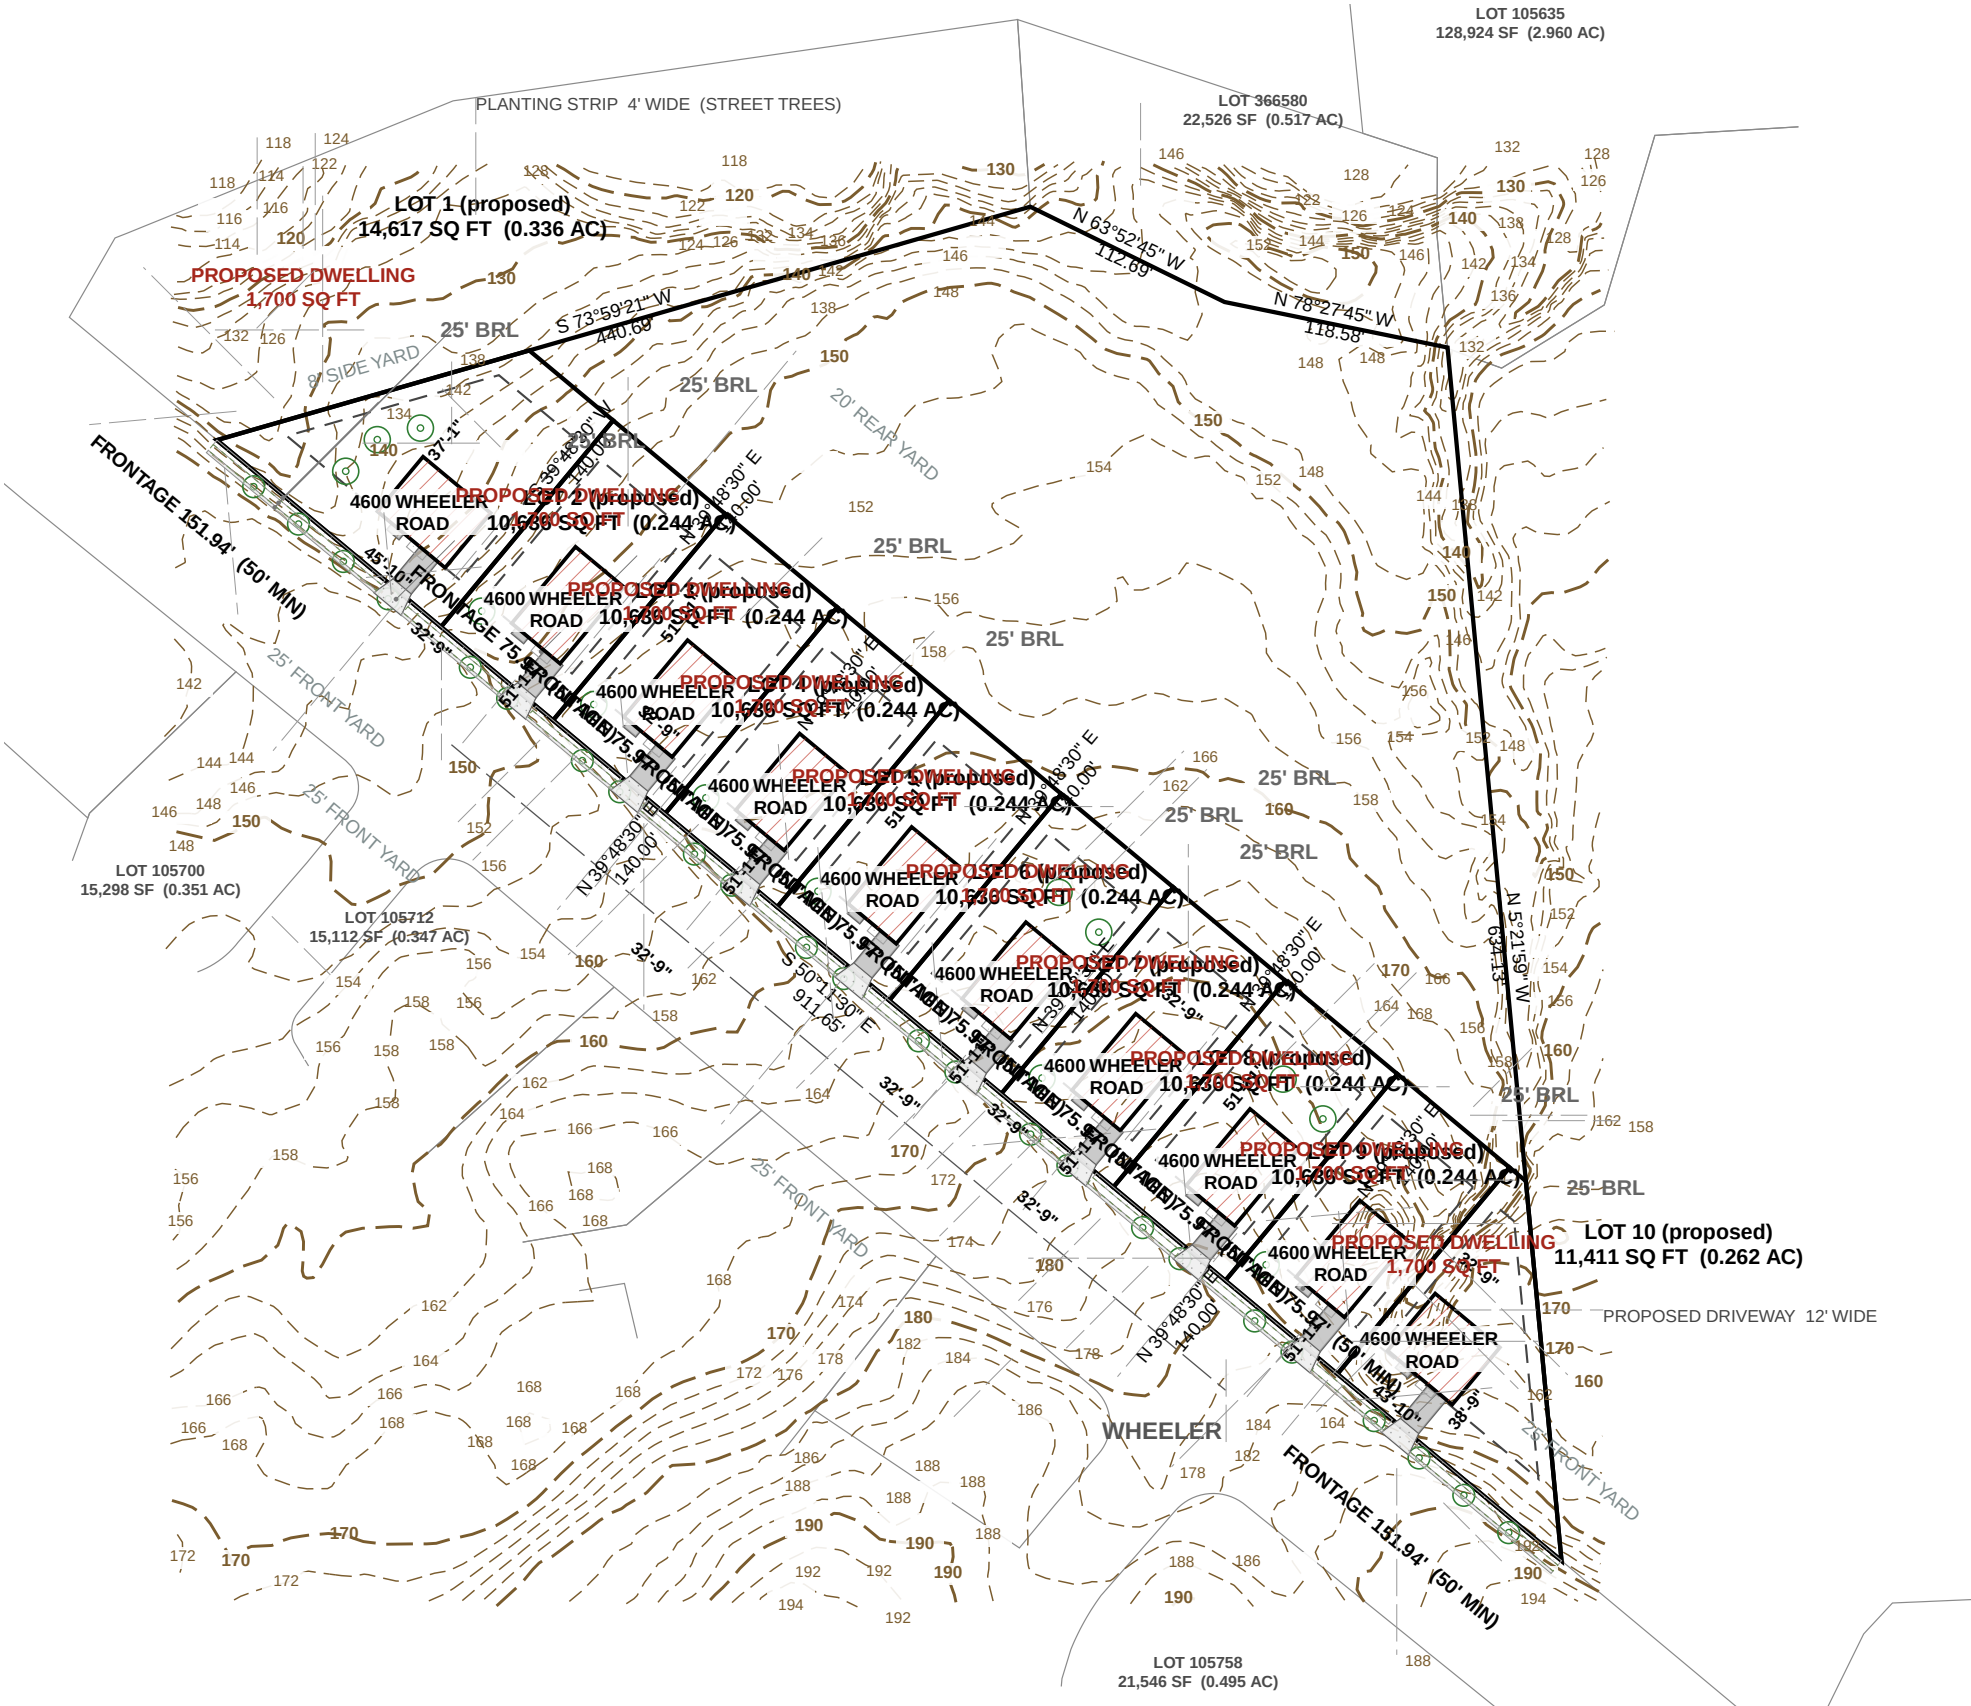

TREE CANOPY SCHEDULE

Sec. 25-128 Table 1 as amended by CB-021-2024 — 20% of NET tract area on RSF-95, met within 8'. Per lot planting per Landscape Manual Sec. 4.1(c)(1). Street trees in the right-of-way count toward canopy under Sec. 25-129.

LOT	NET AREA SF	CANOPY REQ 20% SF	SHADE PROV / REQ	ORN-EVON PROV / REQ	STREET TREES	10-YR CANOPY PROVIDED
LOT 1 (proposed)	14,617	2,923	3/3	0/2 SHORT	4	NOT ESTABLISHED
LOT 2 (proposed)	10,636	2,127	1/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED
LOT 3 (proposed)	10,636	2,127	1/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED
LOT 4 (proposed)	10,636	2,127	1/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED
LOT 5 (proposed)	10,636	2,127	1/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED
LOT 6 (proposed)	10,636	2,127	2/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED
LOT 7 (proposed)	10,636	2,127	1/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED
LOT 8 (proposed)	10,636	2,127	2/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED
LOT 9 (proposed)	10,636	2,127	1/3 SHORT	0/2 SHORT	2	NOT ESTABLISHED

* 2 further trees) — see the accompanying schedule.

10-YEAR CANOPY IS CREDITED PER SPECIES FROM THE PRINCE GEORGE'S COUNTY LANDSCAPE MANUAL. NO SPECIES HAS BEEN SELECTED ON THIS SET. SO THE CANOPY PROVIDED IS NOT ESTABLISHED AND THE SCHEDULE IS NOT YET BALANCED. EXISTING TREES PRESERVED ALSO COUNT.


NO TREE IS PLANTED WITHIN A STORM DRAIN EASEMENT; THE 60 FT 54% EASEMENT CARRIES THE 42 IN RCP MAIN AND THE 10 FT REAR EASEMENT CARRIES THE DRAINAGE SWALE. BOTH ARE SHOWN ON THIS SHEET AND BOTH ARE EXCLUDED FROM PLANTABLE AREA.

A WAIVER OF THE CANOPY REQUIREMENT IS AVAILABLE UNDER SEC. 25-130.

PER LOT PLANTING IS SHORT ON EVERY LOT AS DRAWN. LANDSCAPE MANUAL, SEC. 4.1(c)(1) REQUIRES A MAJOR SHADE AND 3 ORNAMENTAL, OR EVERGREEN TREES ON A LOT OF 20,000 SF OR MORE, AND 3 AND 3 ON A LOT OF 3,500 TO 19,999 SF. NO ORNAMENTAL, OR EVERGREEN TREES ARE DRAWN. AT LEAST ONE SHADE TREE MUST STAND ON THE SOUTH OR WEST SIDE WITHIN 30 FT OF THE DWELLING, AND AT LEAST ONE REQUIRED TREE IN THE FRONT YARD. SPECIES AND FINAL LOCATIONS BY THE LANDSCAPE ARCHITECT.


THE CANOPY REQUIREMENT MUST BE MET ON-SITE UNLESS A VARIANCE IS APPROVED, AND WHERE A GRADING PERMIT IS THE ONLY APPLICATION THE CANOPY NOTES BELONG ON THE GRADING PLAN — ENVIRONMENTAL, TECHNICAL, PART D, SEC. 3.0.

CONCRETE CURB AND GUTTER — PGC DPW&T STD. 300.01

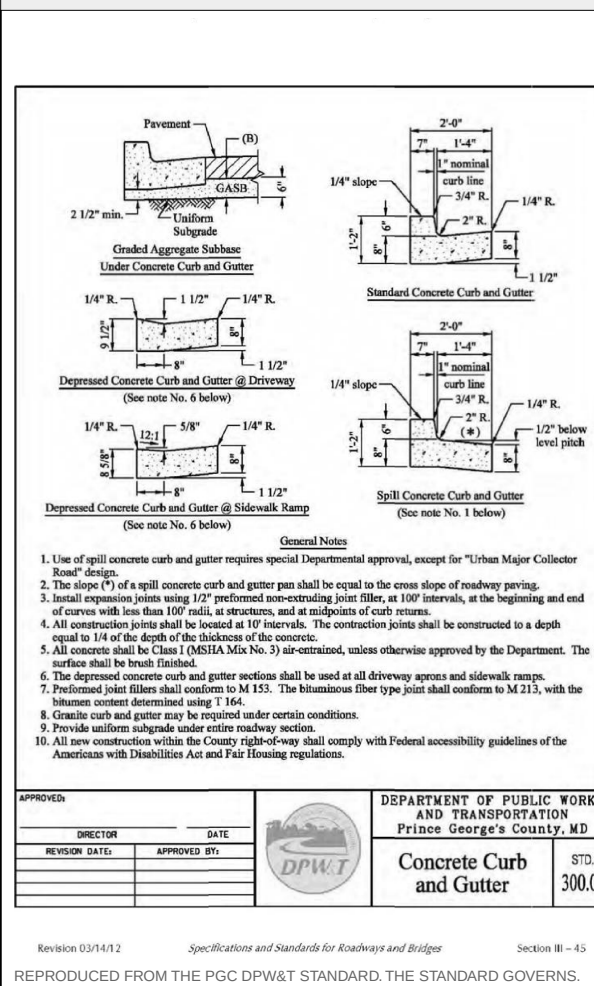

GRAPHIC SCALE — 1" = 100'

CONCRETE SIDEWALK RAMP TYPE A — PGC DPW&T STD. 300.07

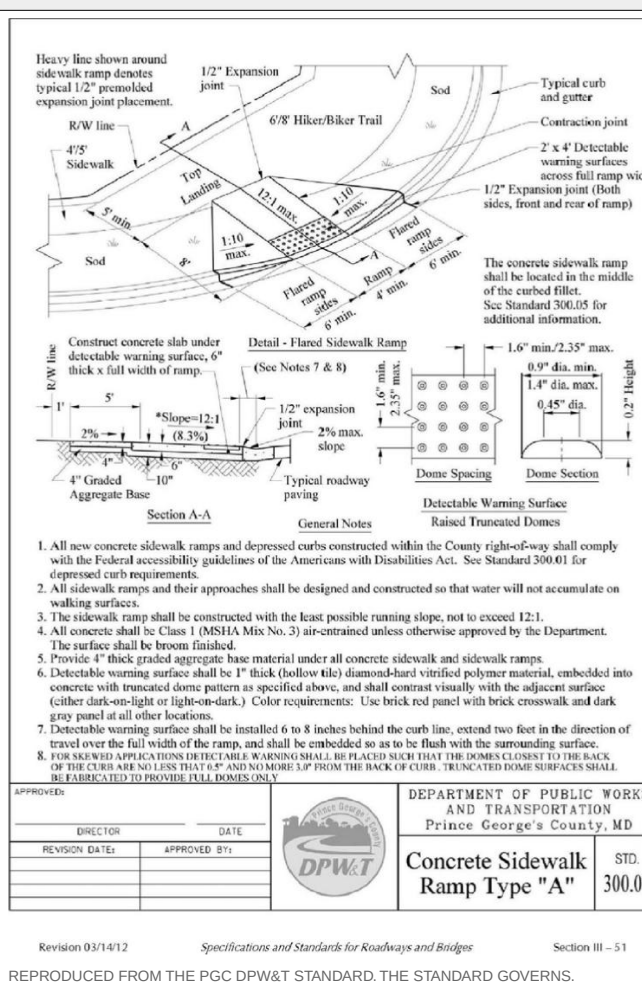

REPRODUCED FROM THE PGC DPW&T STANDARD THE STANDARD GOVERNS.

