

SITE DEVELOPMENT PLANS

ESTATES AT INDIAN HEAD — LOTS 1–6

200, 201, 202, 203, 204, 205 ESTATES COURT

Prince George's County, Maryland

INDEX OF DRAWINGS

SHEET	TITLE
C-000	Cover Sheet, Approvals and General Notes
C-100	Existing Conditions and Boundary Plan
C-200	Overall Site and Zoning Plan
C-300	Demolition Plan
C-400	Grading and Drainage Plan
C-500	Utility Plan
C-600	Stormwater Management Plan
C-700	Sediment and Erosion Control Plan
C-800	Road, Driveway and Paving Plan
C-900	Civil Details
L-100	Landscape and Tree Canopy Plan

LEAD DISCIPLINE

Kealee (coordination)
Maryland Licensed Surveyor
Maryland Professional Engineer
Maryland Professional Engineer
Maryland Professional Engineer
Maryland Professional Engineer
Maryland Professional Engineer
Maryland Professional Engineer
Maryland Professional Engineer
Maryland Professional Engineer
Landscape Architect / Qualified Professional

VICINITY MAP

SUBJECT PROPERTY SHOWN IN RED. NOT TO SCALE.

STATUS OF THIS SET

PRELIMINARY. NOT FOR CONSTRUCTION. NOT RELEASED FOR PERMIT. No sheet in this set bears a professional seal. Each discipline certifies only the subjects and objects within its own scope; see the divided responsibility block on each sheet.

Issued 2026-10-01

KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1–6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-000 — Cover Sheet, Approvals and General Notes
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
1 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-000 — Cover Sheet, Approvals and General Notes
DISCIPLINE Kealee (coordination)
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab · B basement · FF finished floor · SF subfloor · HT height · STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed for catchments; Q in cfs. WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSCC 220560 — TRANSCRIED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
SEAL	EXPIRATION DATE
LICENSE NO.	

REVISIONS

— NONE —

SOILS TABLE

USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
ASB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ADA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
ADB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
ADC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained

STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

1. The dimensions shown herein are typical, and may be modified as appropriate for the circumstances.

For traffic safety, all landscape operations within the County Right-of-Way shall comply with the following standards of tree regulations. See MDOT standards MDOT-15-1 and MDOT-15-2 for tree-way standards.

There is to be no tree to be located:

- 10' from gutter line
- 10' from water meter
- 10' from water main
- 10' from electric pole
- 10' from street light or utility pole
- 10' from street light or utility pole
- 10' from street light or utility pole

2. The minimum clear height for trees shall be 12' above finished ground.

3. The minimum clear height for trees shall be 12' above finished ground.

4. The minimum clear height for trees shall be 12' above finished ground.

5. The minimum clear height for trees shall be 12' above finished ground.

6. The minimum clear height for trees shall be 12' above finished ground.

Call "Miss Utility" at 1-800-387-7777 for utility location 48 hours prior to the planting of street trees within the County right-of-way.

APPROVED: _____ DATE: _____

REVISOR: _____ APPROVED BY: _____

DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
Prince George's County, MD

Street Tree Placement in Rural R/W

STD. 600.02

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

1. For the required lighting equipment, see the Landmarks and Support Guide for the utility serving the location.

2. Street light poles to be installed in accordance with the standards of the utility company.

3. Street light poles to be installed in accordance with the standards of the utility company.

4. Street light poles to be installed in accordance with the standards of the utility company.

5. Street light poles to be installed in accordance with the standards of the utility company.

6. Street light poles to be installed in accordance with the standards of the utility company.

Call "Miss Utility" at 1-800-387-7777 for utility location 48 hours prior to the planting of street trees within the County right-of-way.

APPROVED: _____ DATE: _____

REVISOR: _____ APPROVED BY: _____

DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
Prince George's County, MD

Street Light Location in Rural R/W

STD. 600.10

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

1. The dimensions shown herein are typical, and may be modified as appropriate for the circumstances.

For traffic safety, all landscape operations within the County Right-of-Way shall comply with the following standards of tree regulations. See MDOT standards MDOT-15-1 and MDOT-15-2 for tree-way standards.

There is to be no tree to be located:

- 10' from gutter line
- 10' from water meter
- 10' from water main
- 10' from electric pole
- 10' from street light or utility pole
- 10' from street light or utility pole
- 10' from street light or utility pole

2. The minimum clear height for trees shall be 12' above finished ground.

3. The minimum clear height for trees shall be 12' above finished ground.

4. The minimum clear height for trees shall be 12' above finished ground.

5. The minimum clear height for trees shall be 12' above finished ground.

6. The minimum clear height for trees shall be 12' above finished ground.

Call "Miss Utility" at 1-800-387-7777 for utility location 48 hours prior to the planting of street trees within the County right-of-way.

APPROVED: _____ DATE: _____

REVISOR: _____ APPROVED BY: _____

DEPARTMENT OF PUBLIC WORKS AND TRANSPORTATION
Prince George's County, MD

Street Tree Installation in Rural R/W

STD. 600.04



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-100 — Existing Conditions and Boundary Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
2 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-100 — Existing Conditions and Boundary Plan
DISCIPLINE Maryland Licensed Surveyor
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS REQUIRED PROVIDED	
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE MAX PROPOSED	
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

1. Gross tract area	165,902 SF
2. Area of dwelling	13,629 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	129,857 SF
6. TOTAL AREA DISTURBED	55,702 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs; WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 2205601 — TRANSFERRED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


REVISIONS

— NONE —

SOILS TABLE — USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

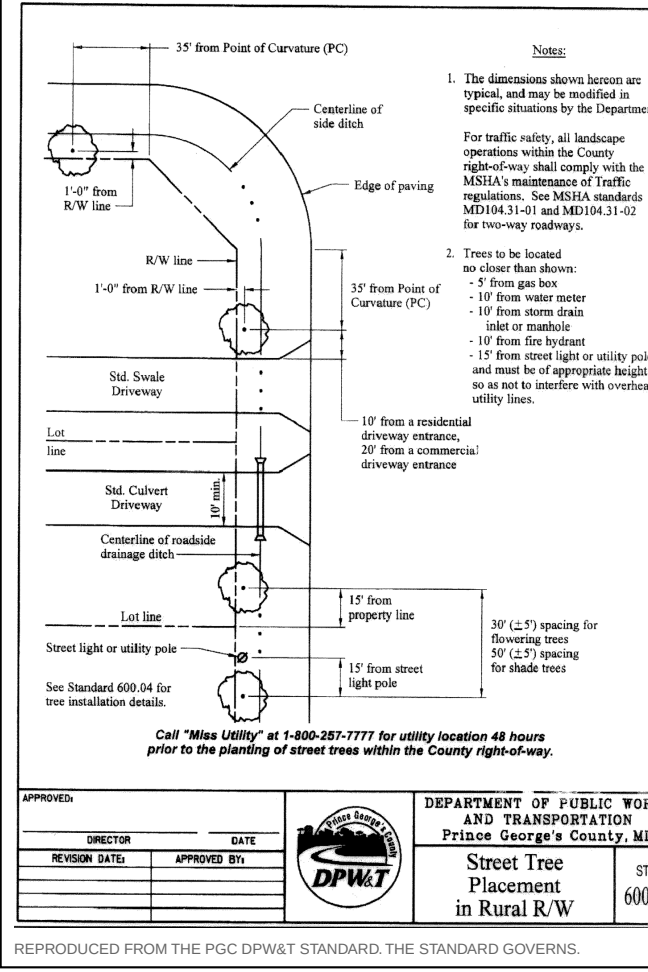

GRAPHIC SCALE — 1" = 100'


0 100 200 300 400 FEET

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

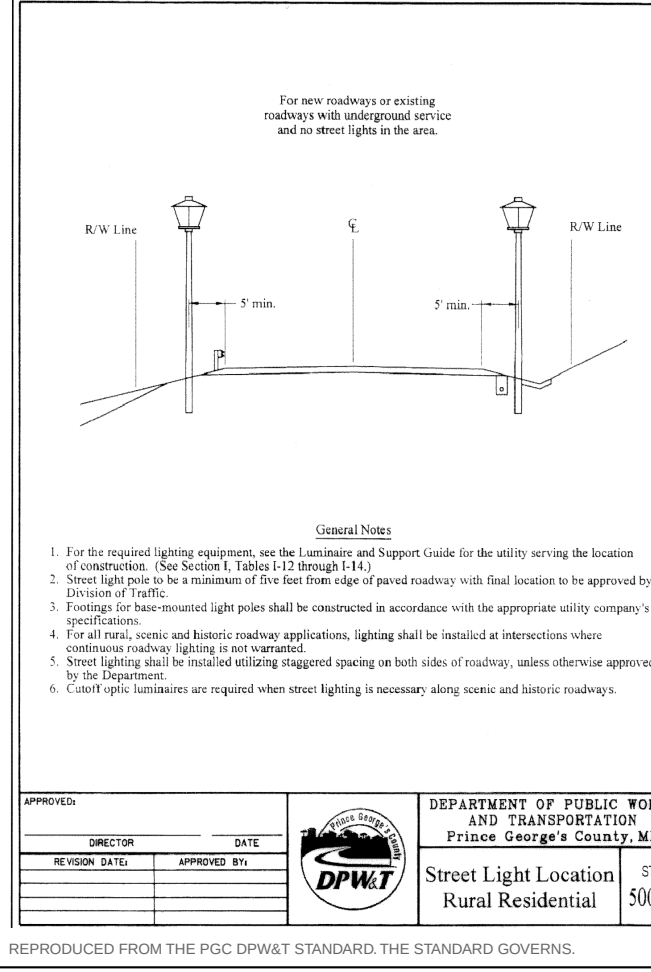

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

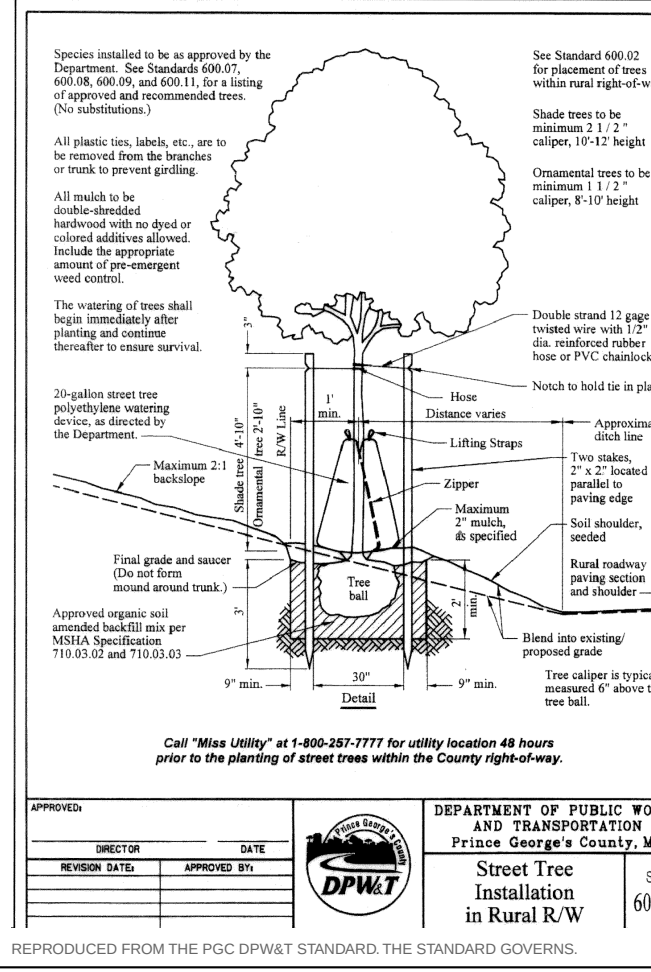

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-300 — Demolition Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
4 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-300 — Demolition Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Woods area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VIEW LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 2205601 — TRANSFERRED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.


PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
SEAL	LICENSE NO.
	EXPIRATION DATE

REVISIONS


— NONE —

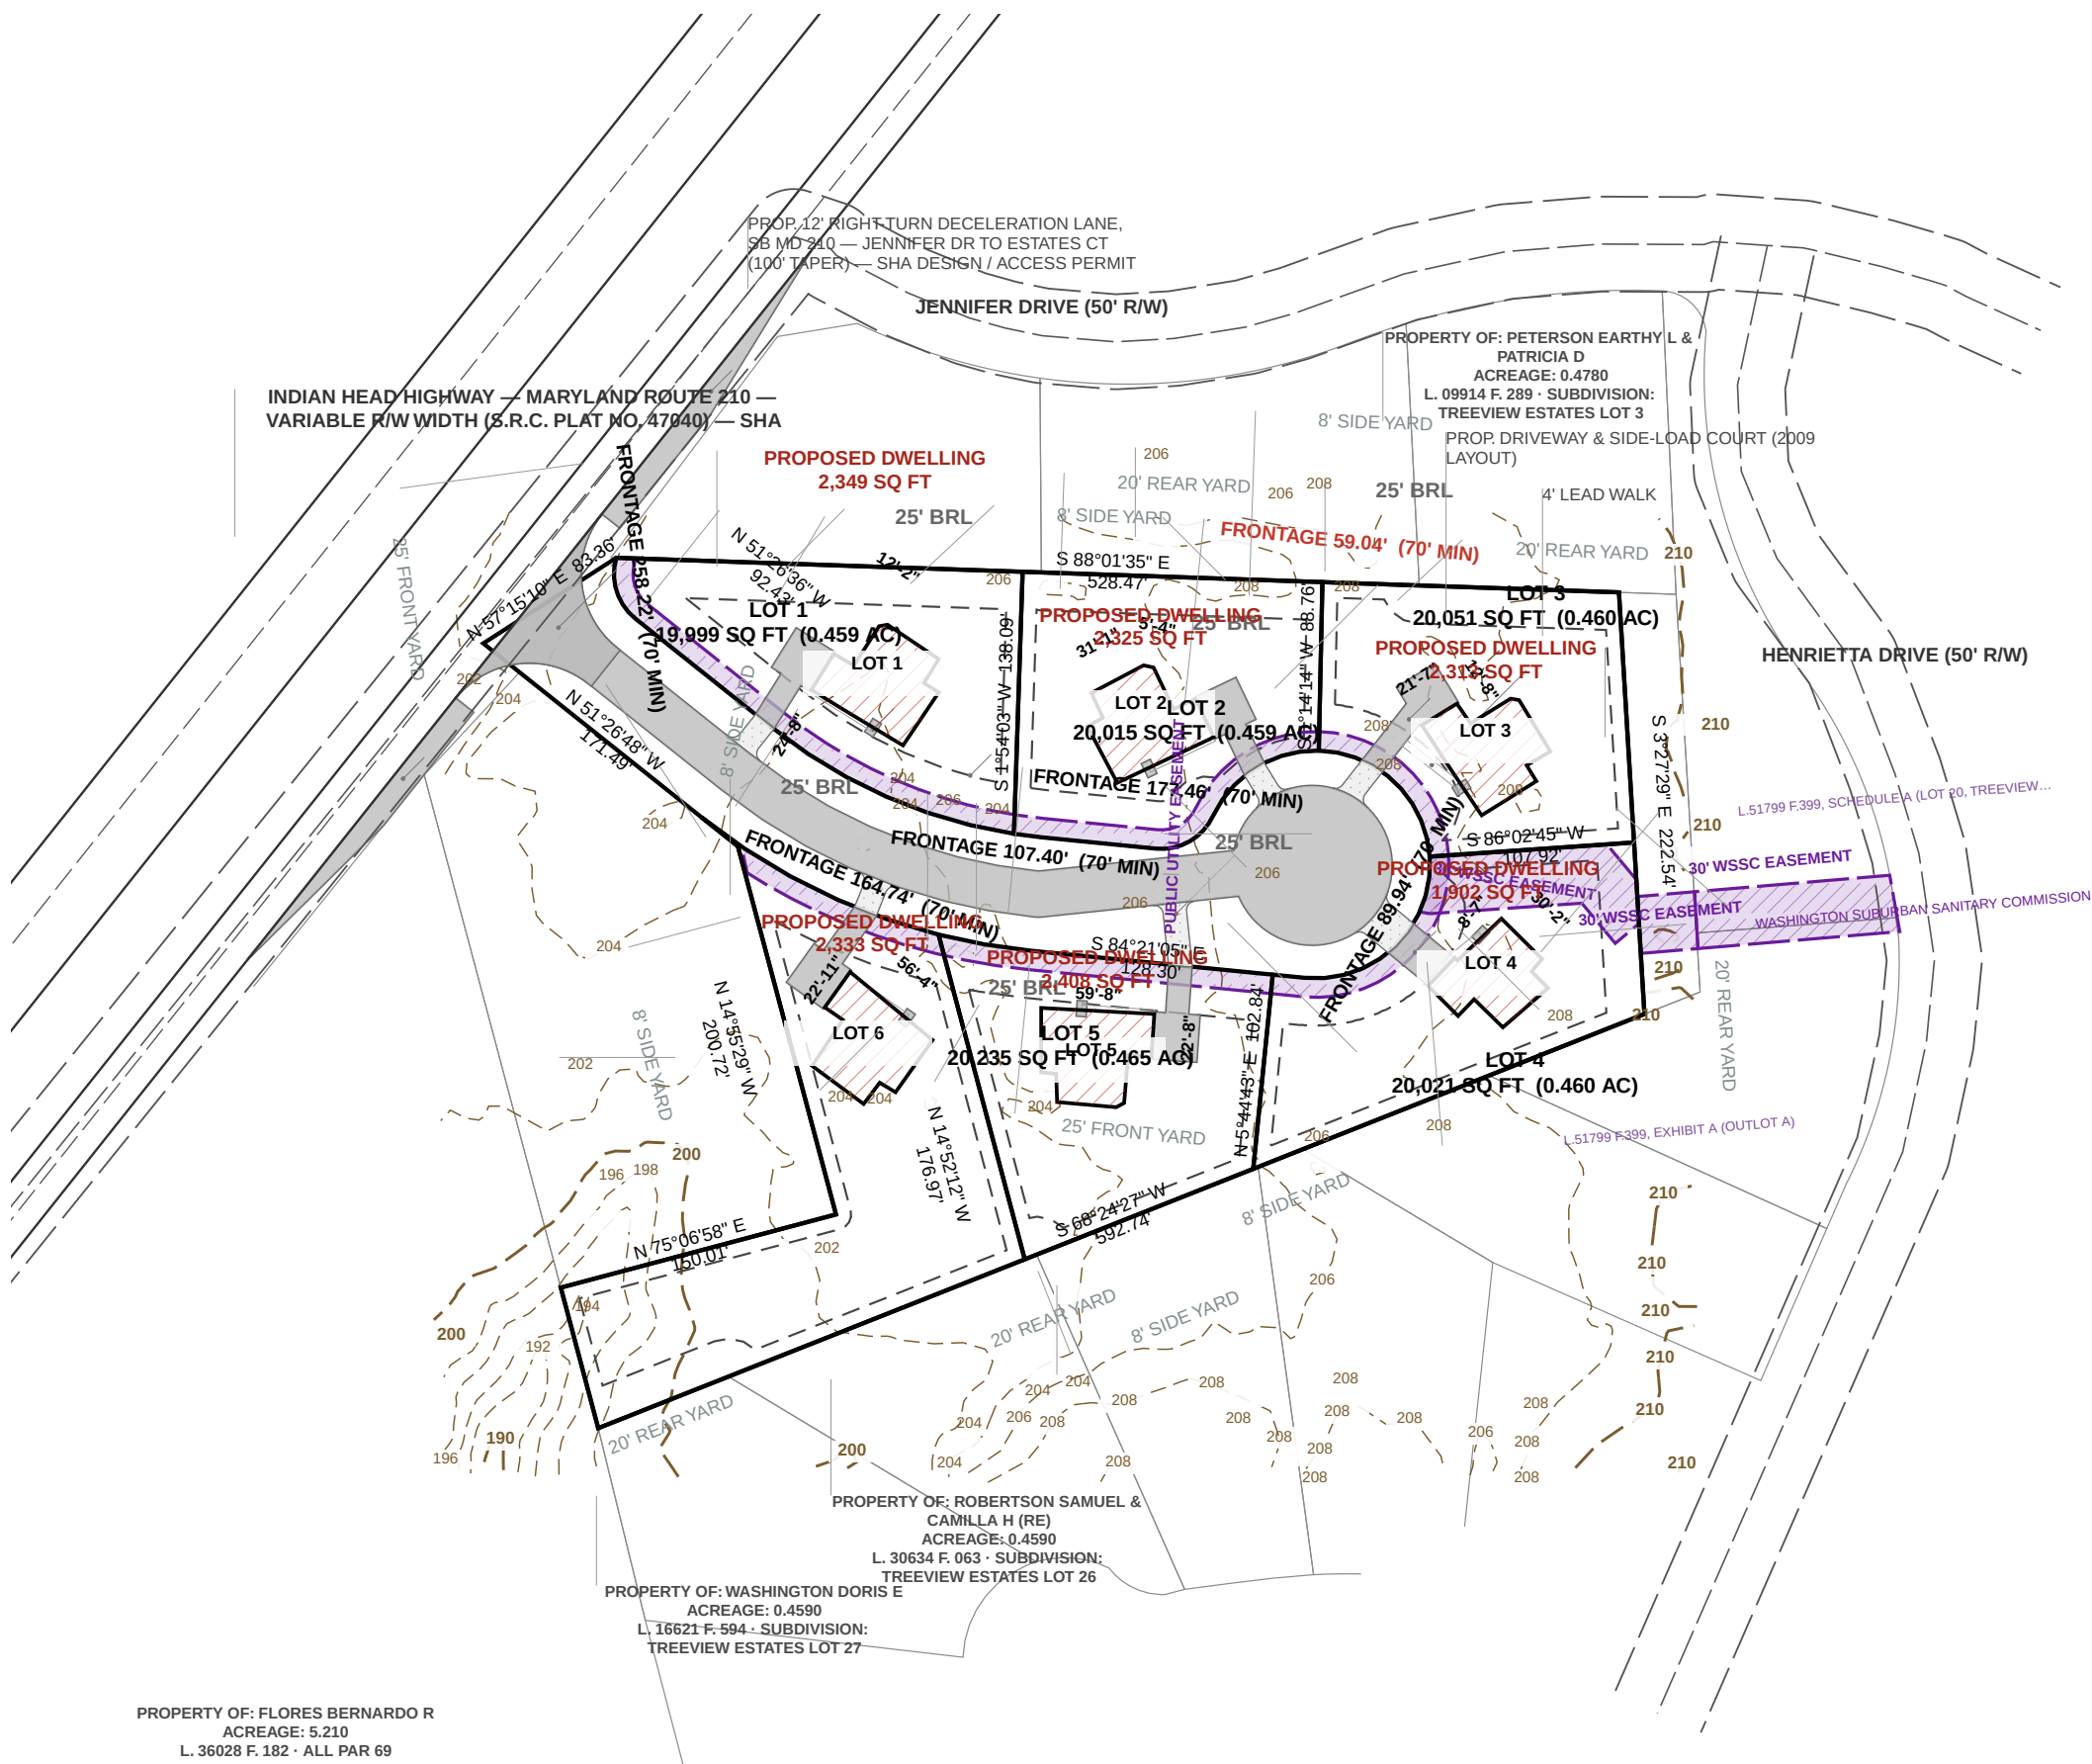


SOILS TABLE — USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

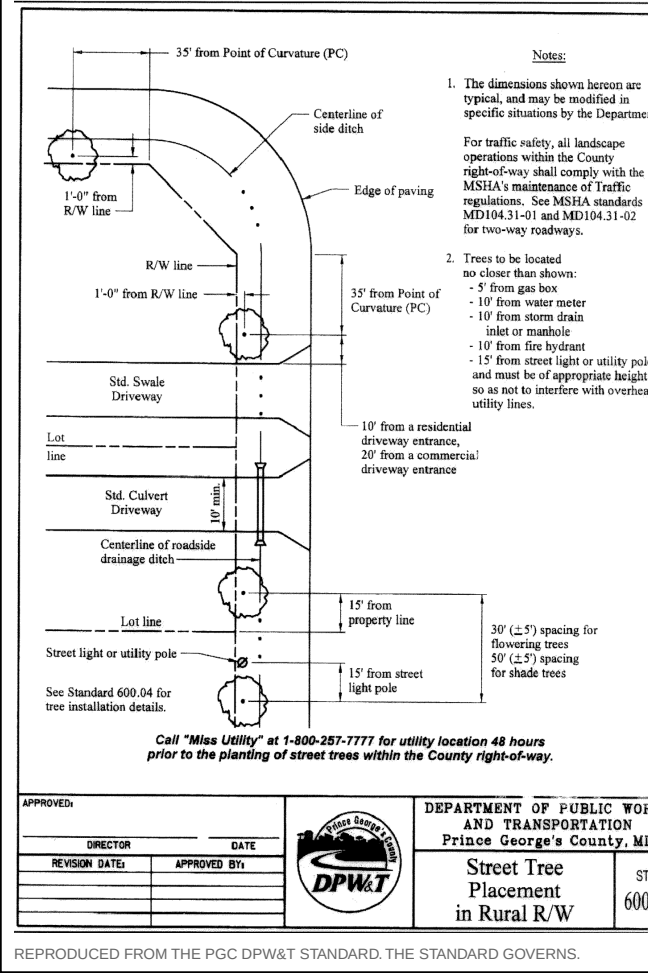

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

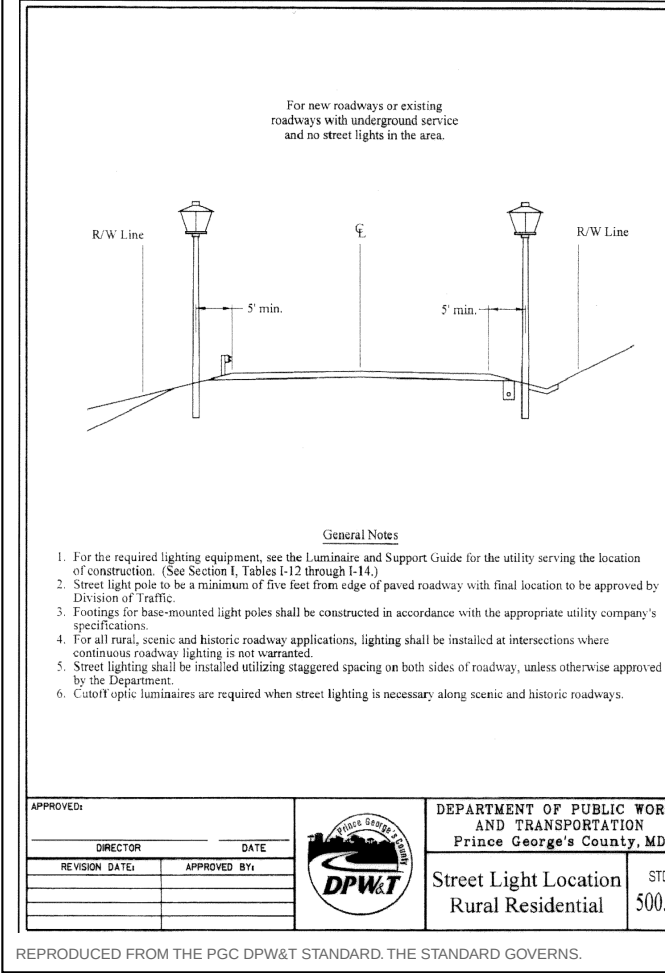

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

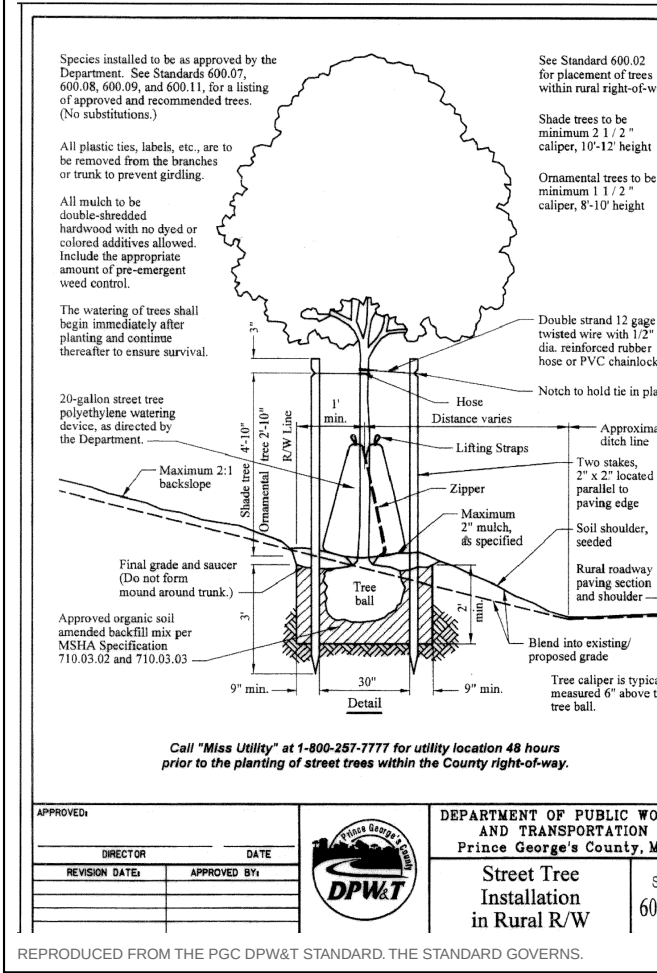



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-400 — Grading and Drainage Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
5 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-400 — Grading and Drainage Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION, FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 200501 — TRANSCRIED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


*REQUIRED NOTE(S) — GRADING CERTIFICATE; STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE — ARE CARRIED IN FULL ON SHEET C-400.

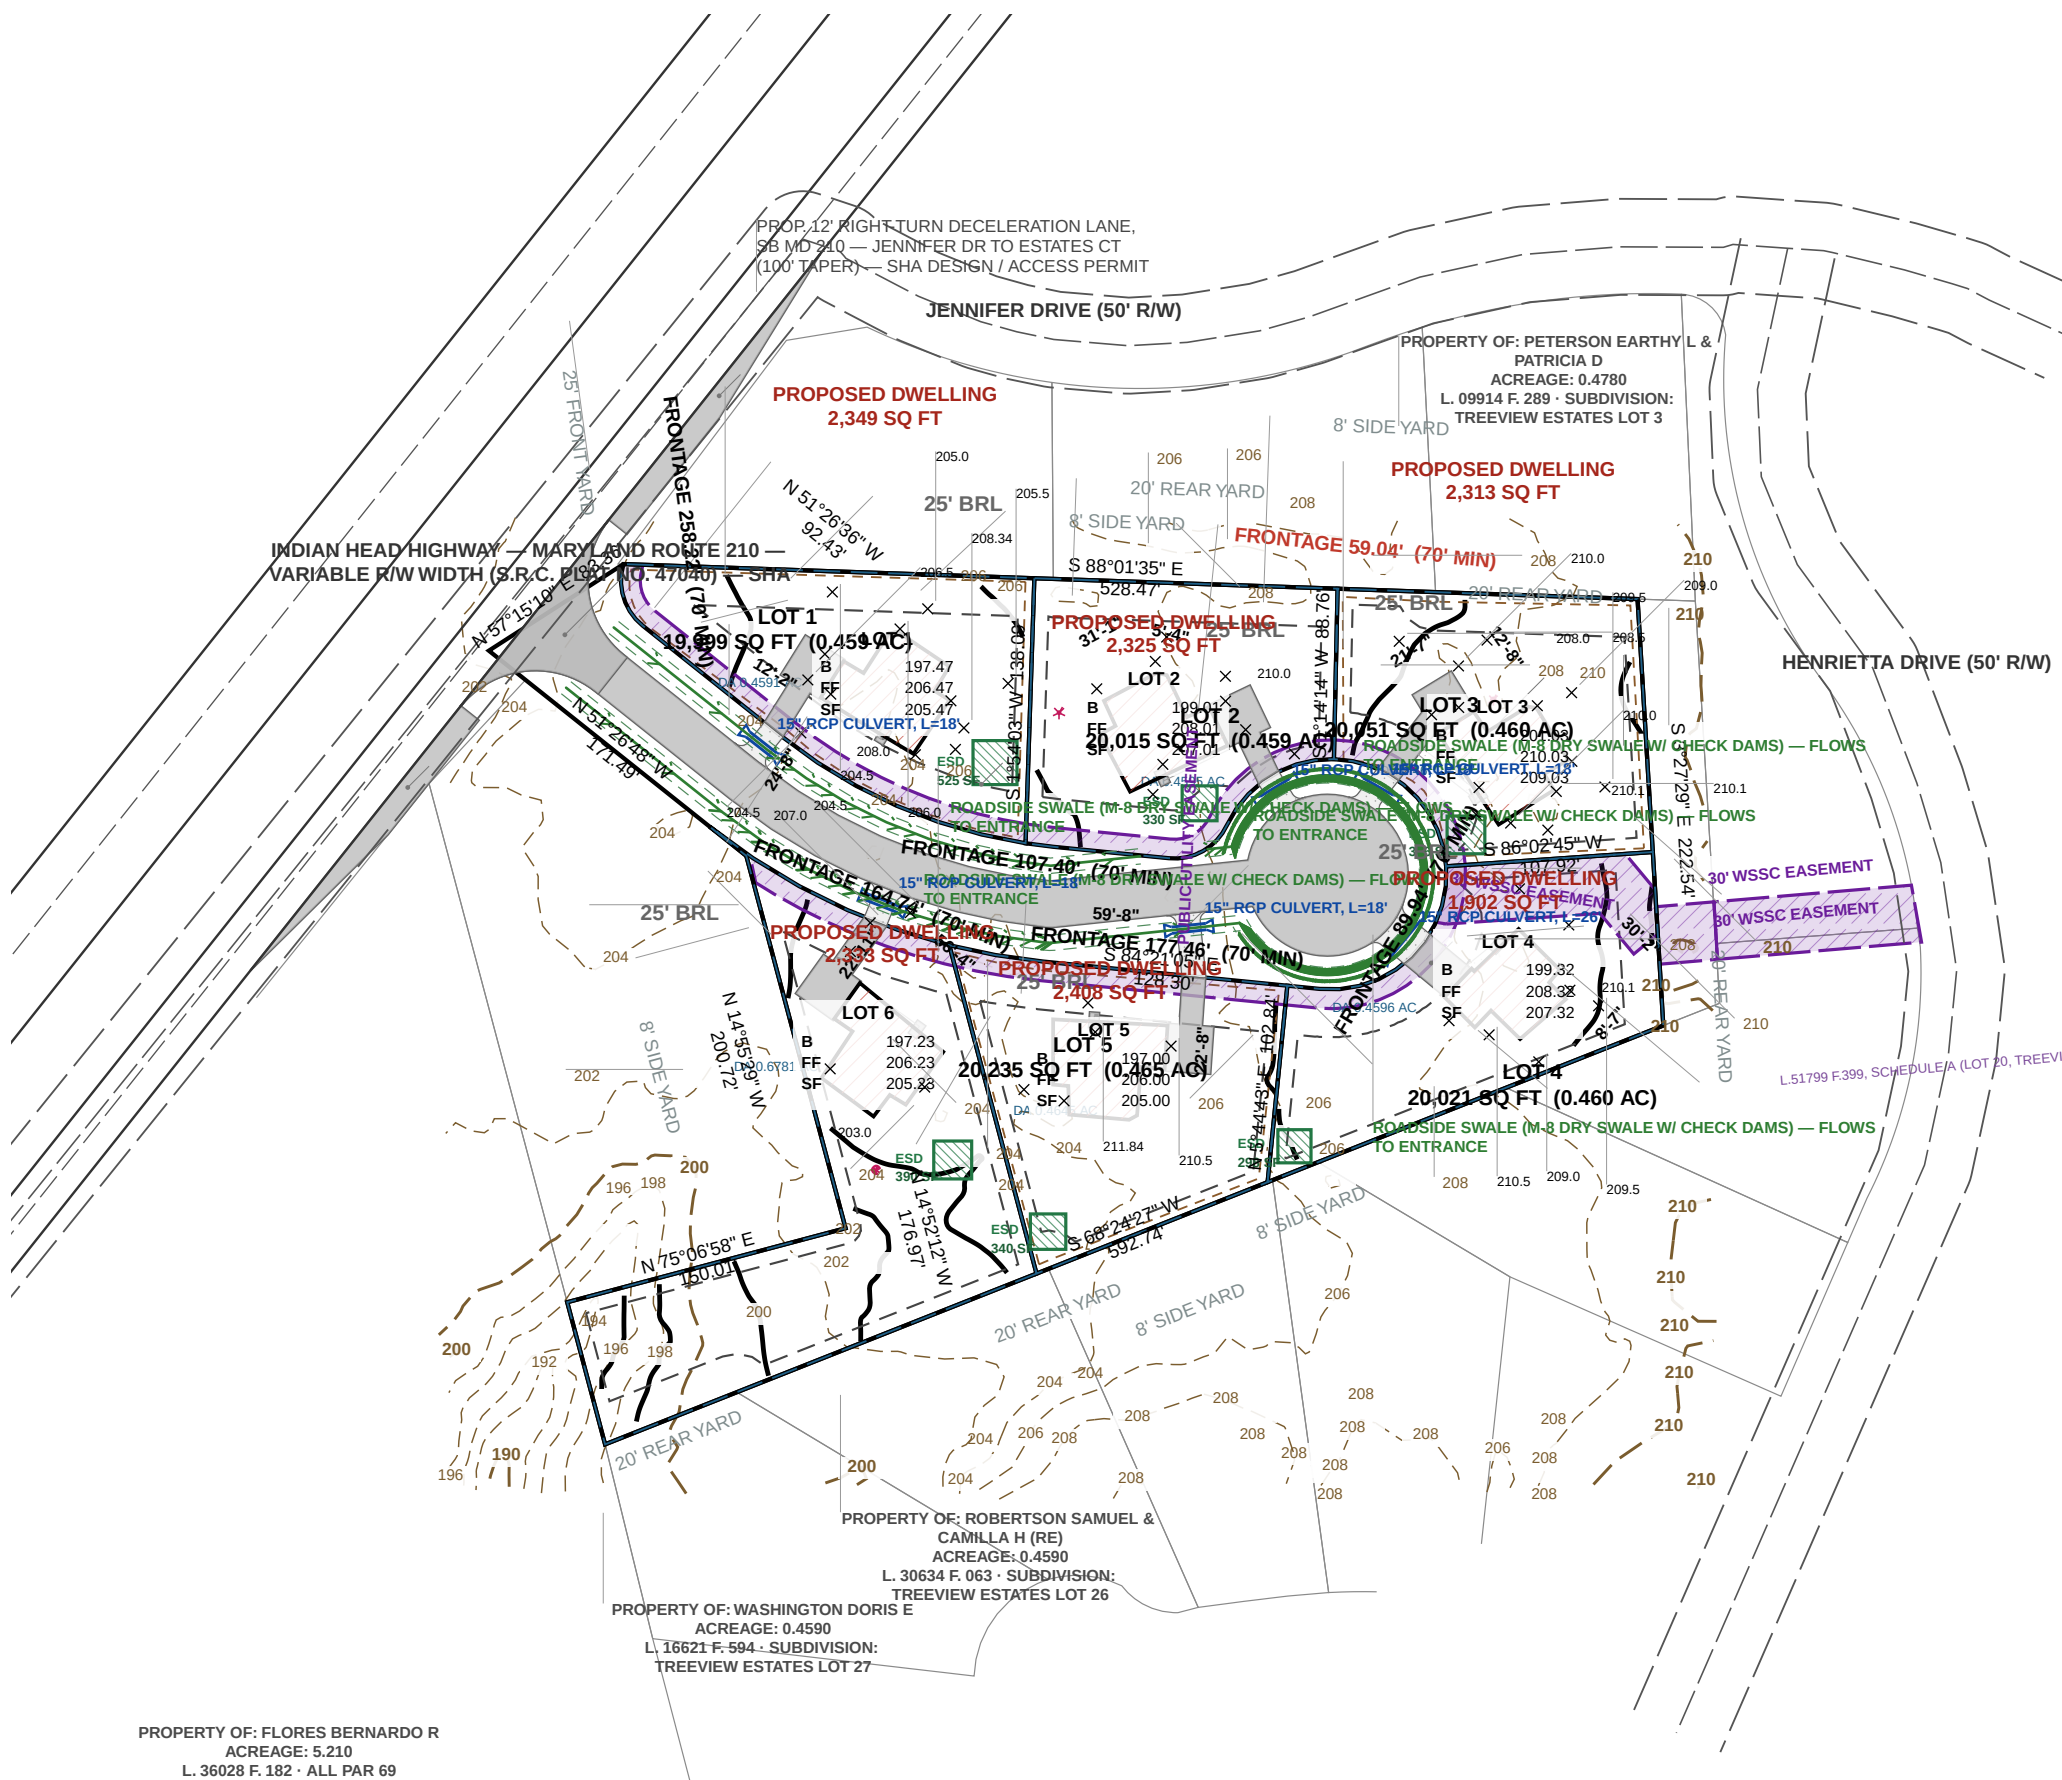


SOILS TABLE — USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

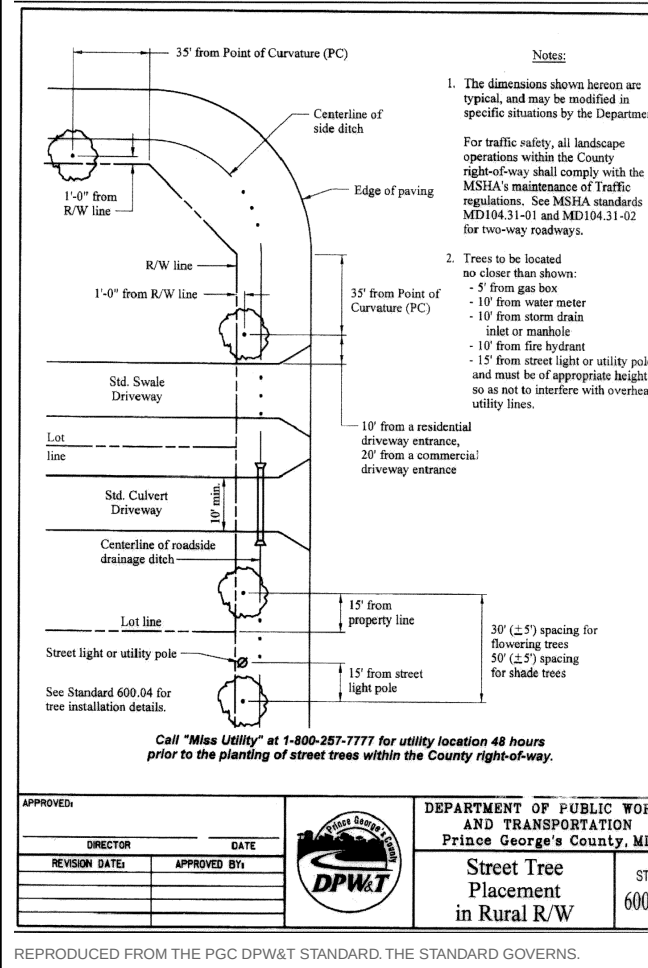

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

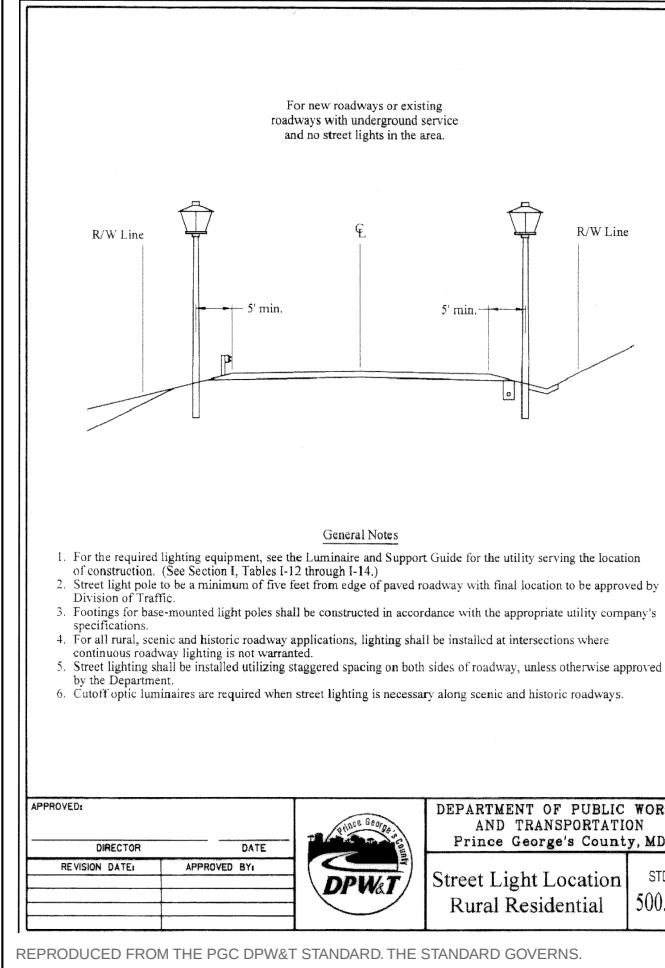

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

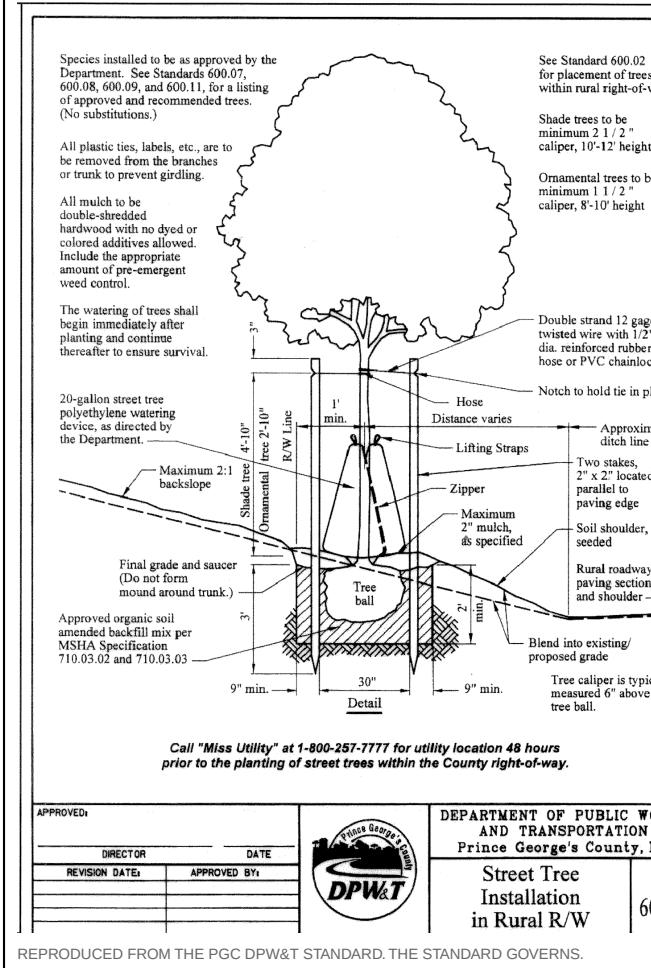



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-500 — Utility Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
6 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-500 — Utility Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,021 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 2205601 — TRANSCRIED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
SEAL	EXPIRATION DATE
LICENSE NO.	


REVISIONS

— NONE —

SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

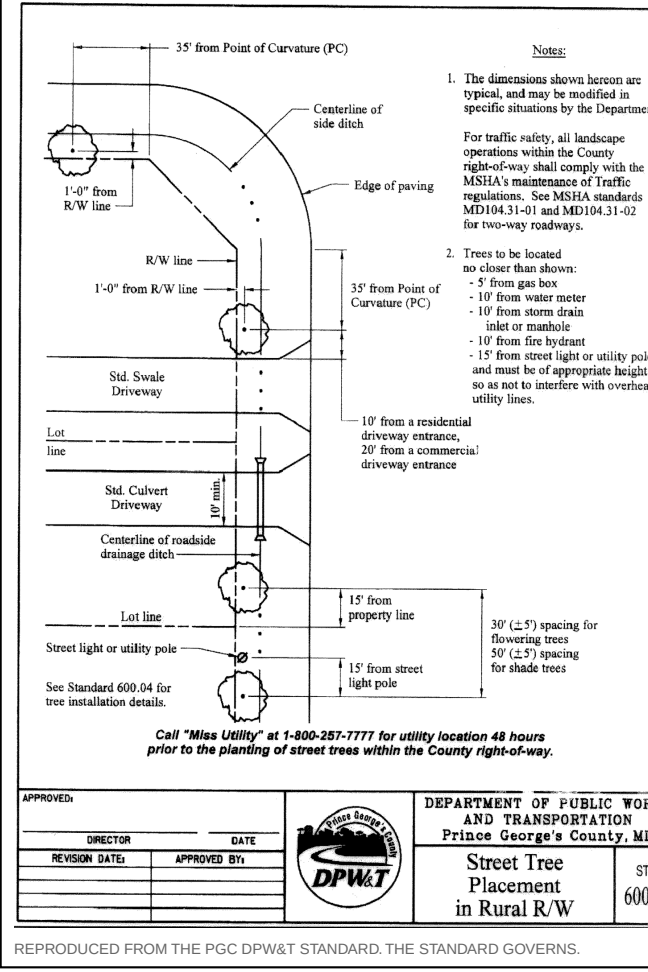

GRAPHIC SCALE — 1" = 100'


0 100 200 300 400 FEET

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

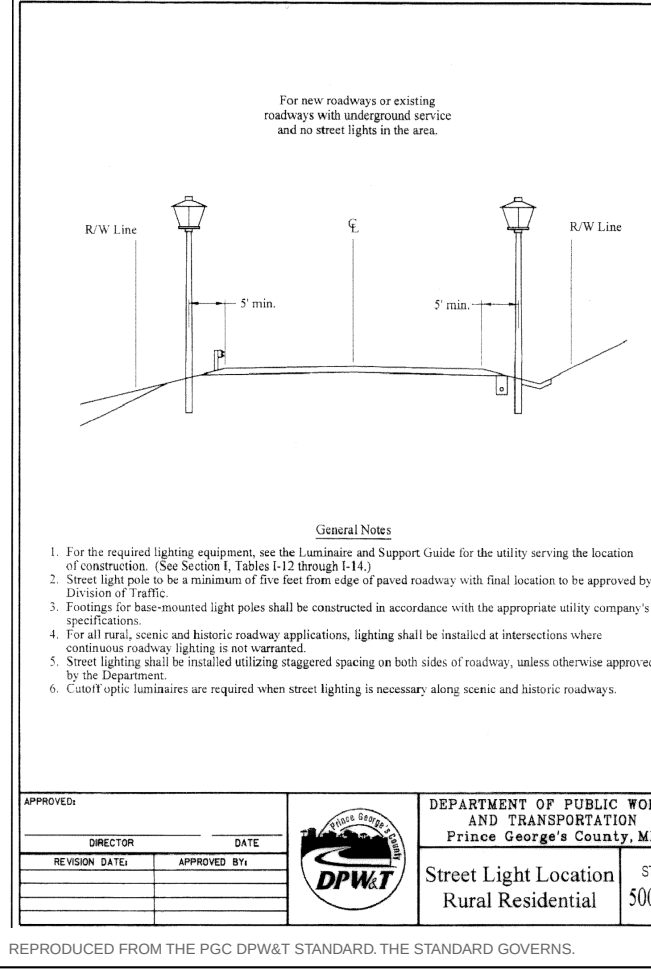

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

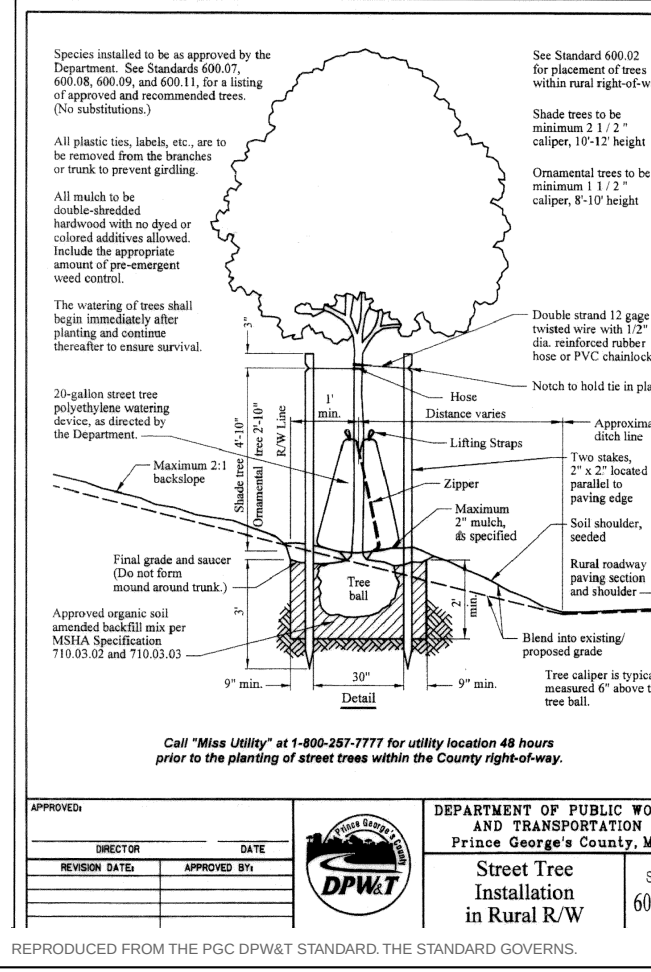

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-600 — Stormwater Management Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
7 OF 11
COORDINATES
EPSG 2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-600 — Stormwater Management Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS REQUIRED PROVIDED	
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE MAX PROPOSED	
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Woods area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs; WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220560 — TRANSCRIED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
SEAL	LICENSE NO.
	EXPIRATION DATE


REVISIONS

— NONE —

SOILS TABLE USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

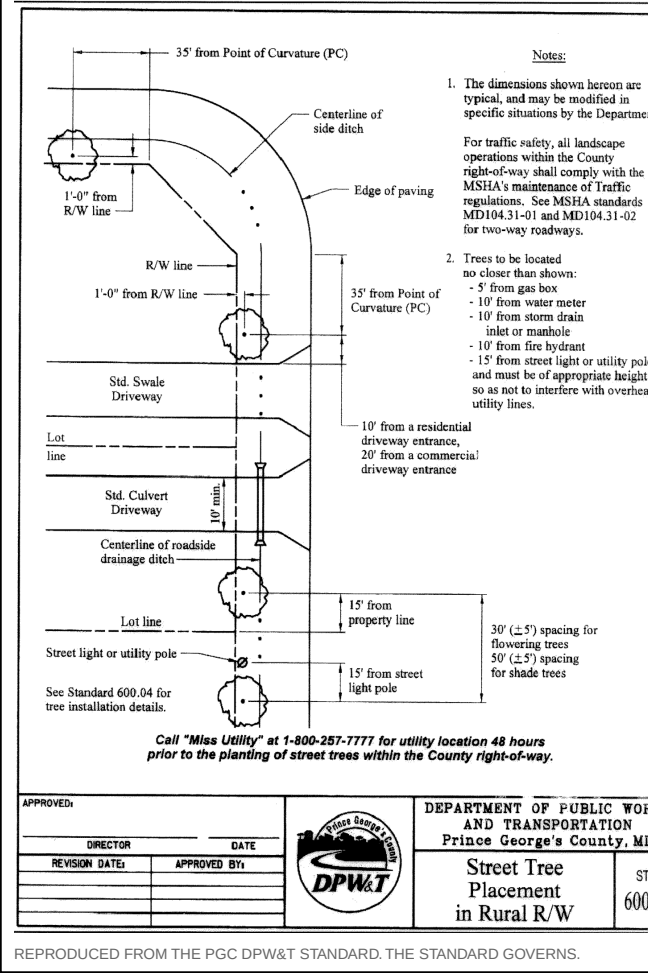

GRAPHIC SCALE — 1" = 100'


0 100 200 300 400 FEET

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

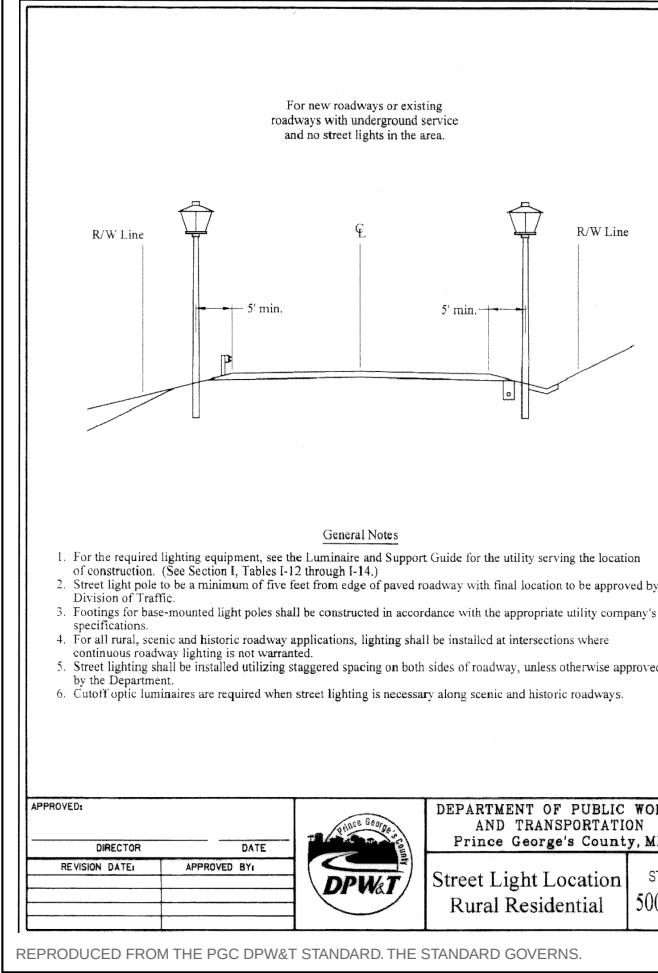

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

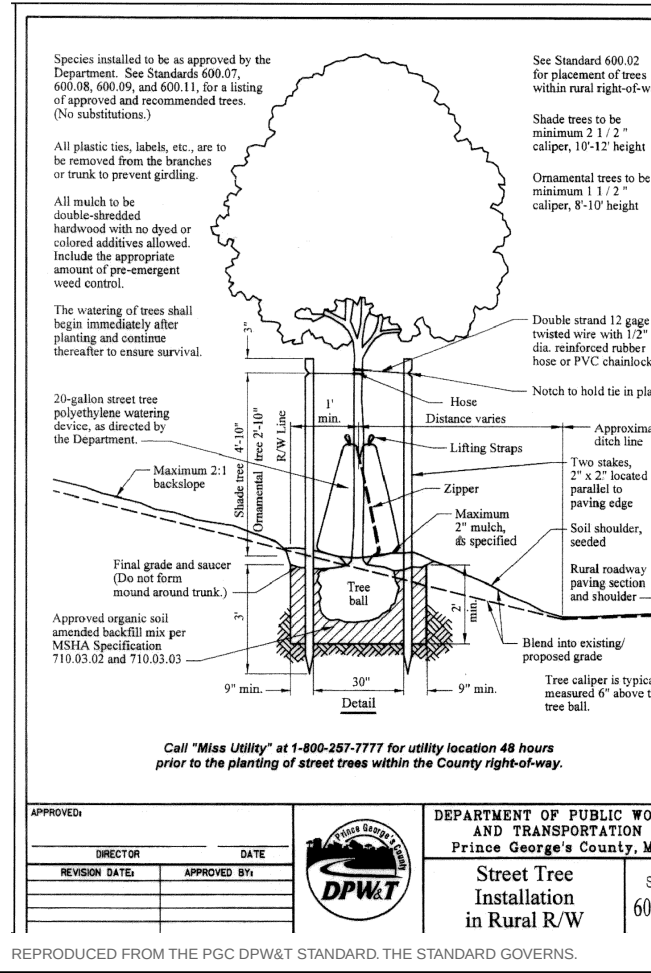

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-700 — Sediment and Erosion Control Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
8 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-700 — Sediment and Erosion Control Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS REQUIRED PROVIDED	
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE MAX PROPOSED	
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

1. Gross tract area	165,902 SF
2. Area of dwelling	13,629 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	129,857 SF
6. TOTAL AREA DISTURBED	55,702 SF (AT LEAST)
7. SWM REQUIRED — Sec 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs. WQv is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS


GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 202001 — TRANSCORDED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


REQUIRED NOTE(S) — STABILIZATION COMPLIANCE PREAMBLE; STANDARD STABILIZATION NOTE — ARE CARRIED IN FULL ON SHEET C-600.

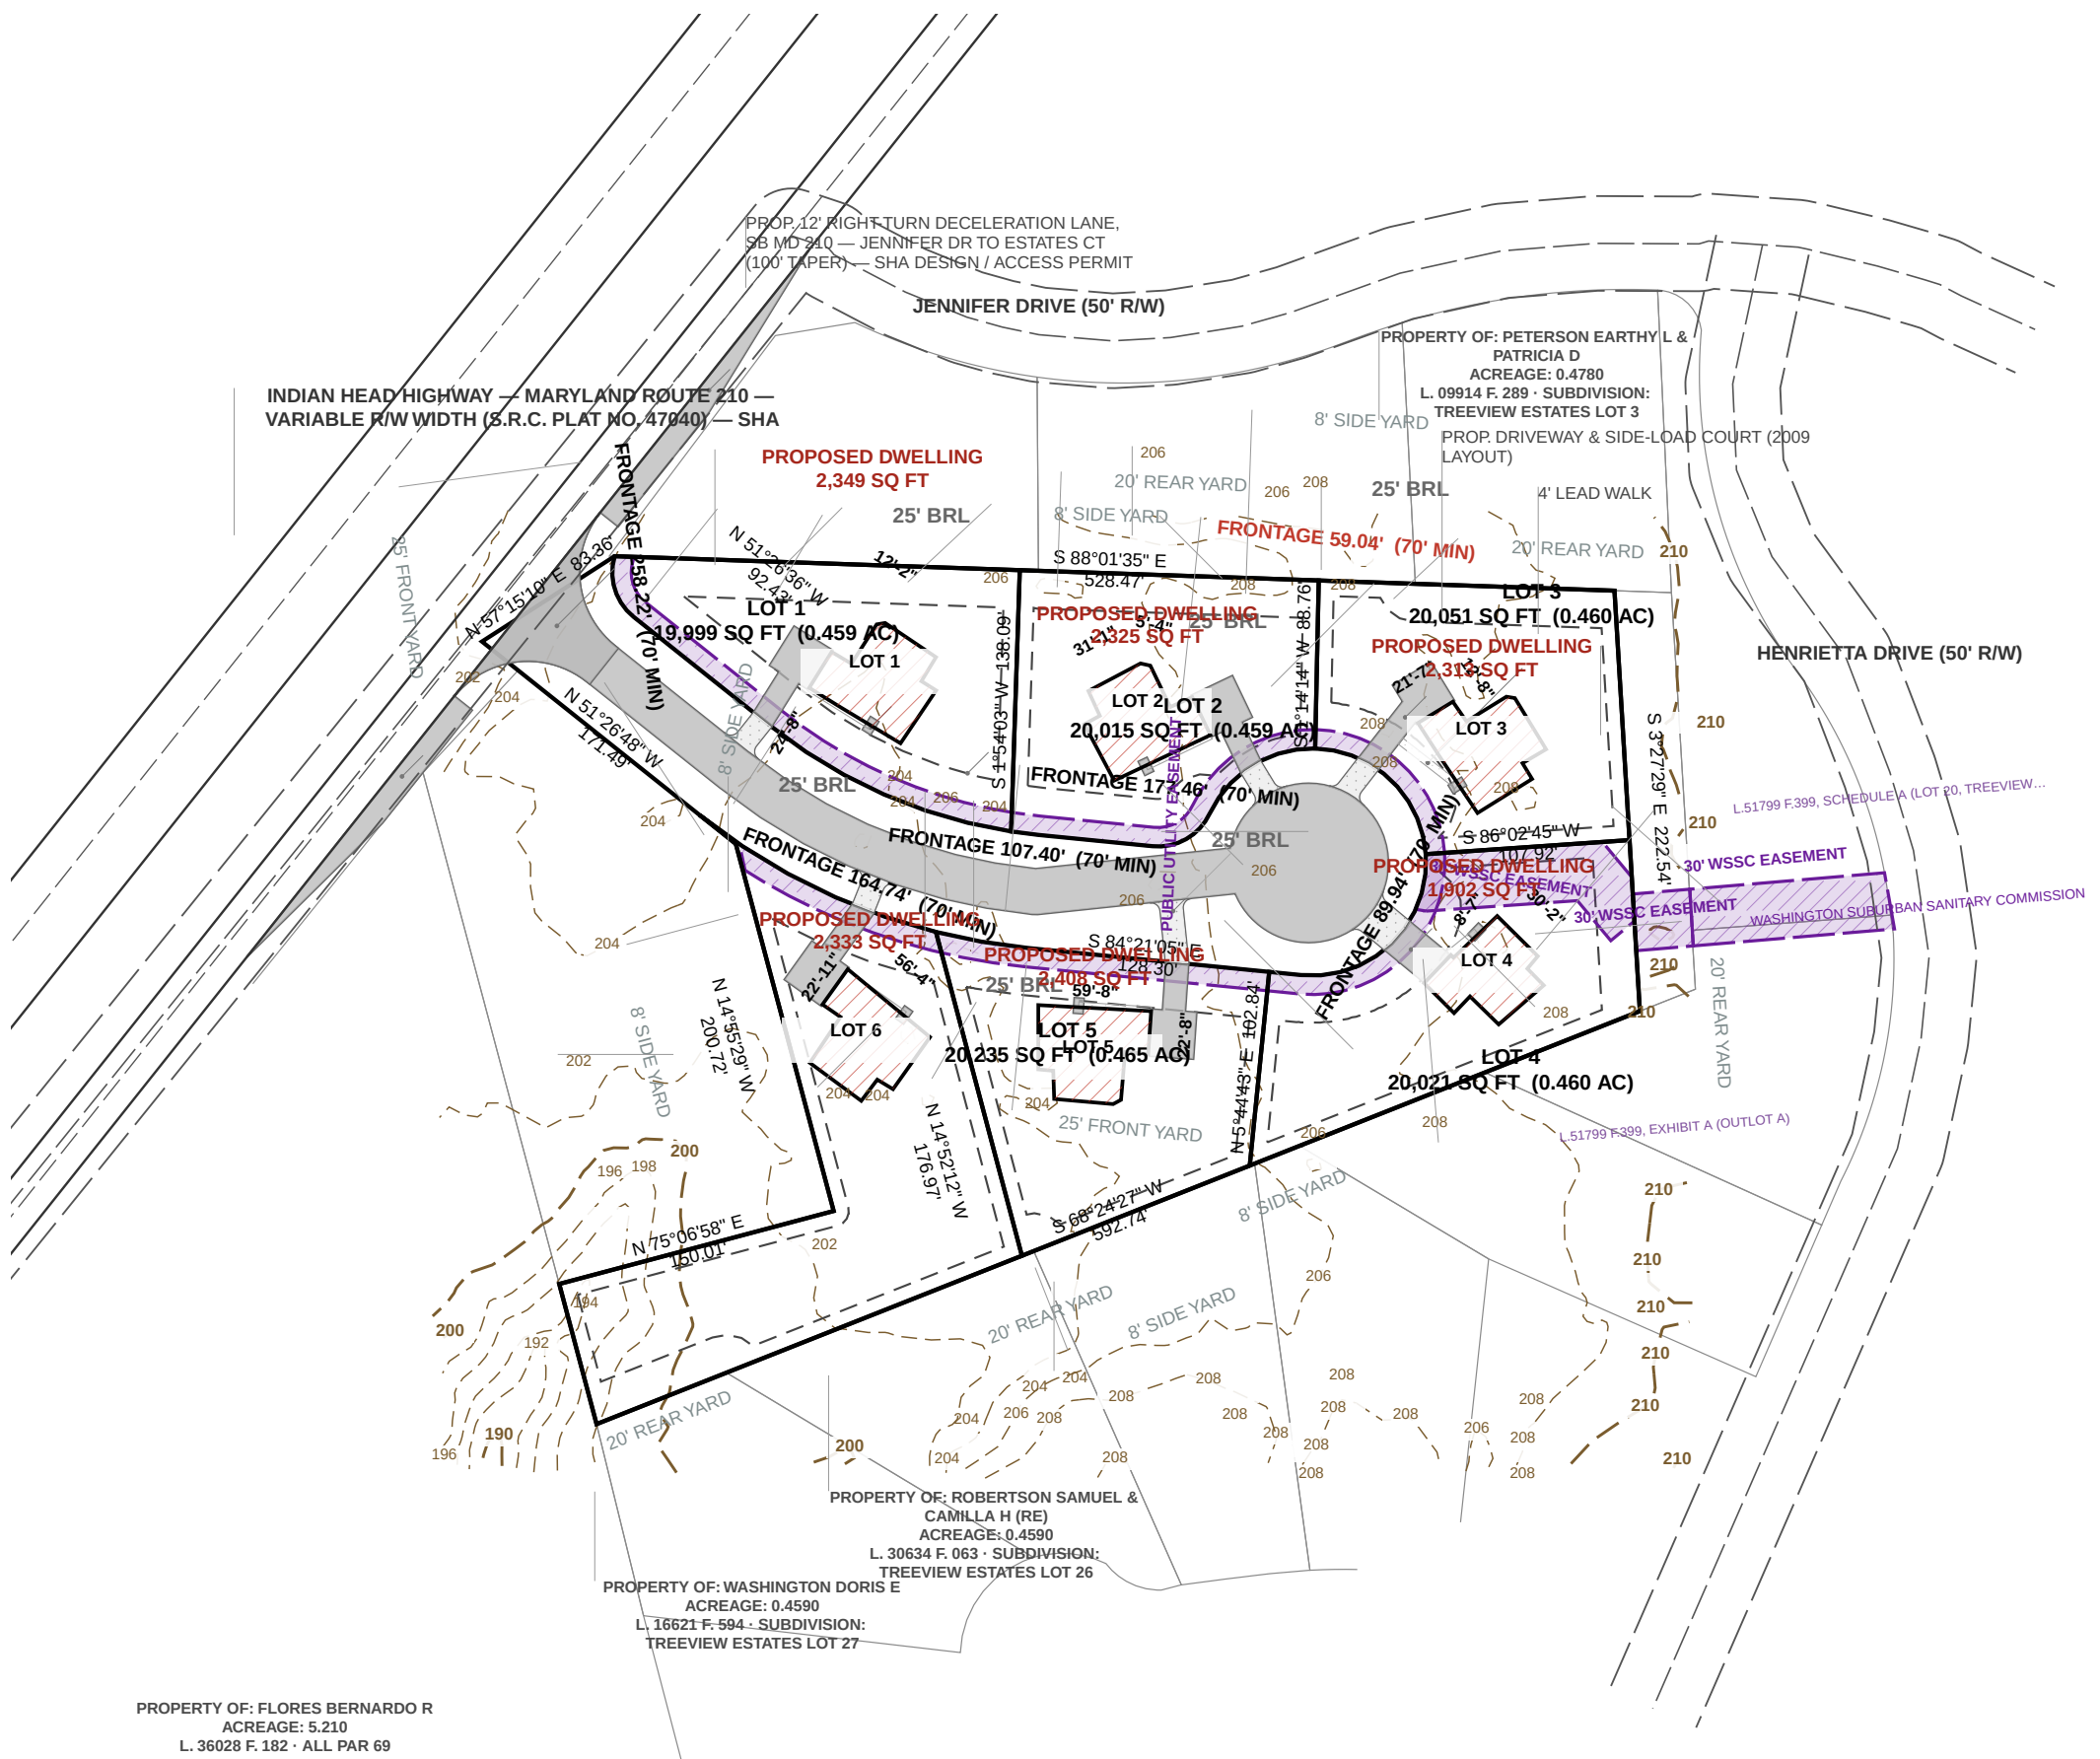


SOILS TABLE — USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphi silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphi-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphi-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphi-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphi-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained



STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

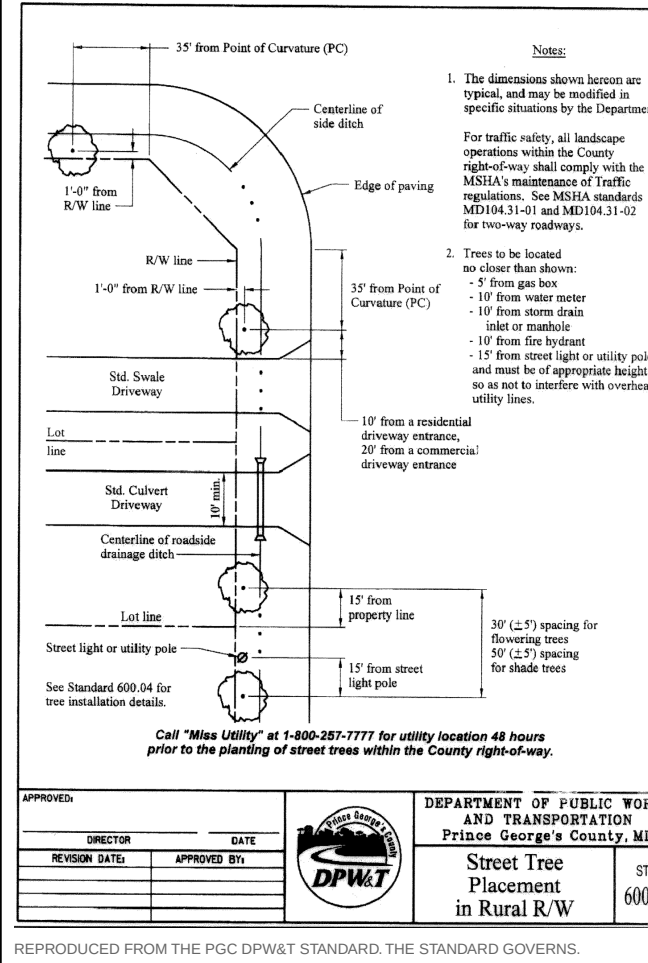

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

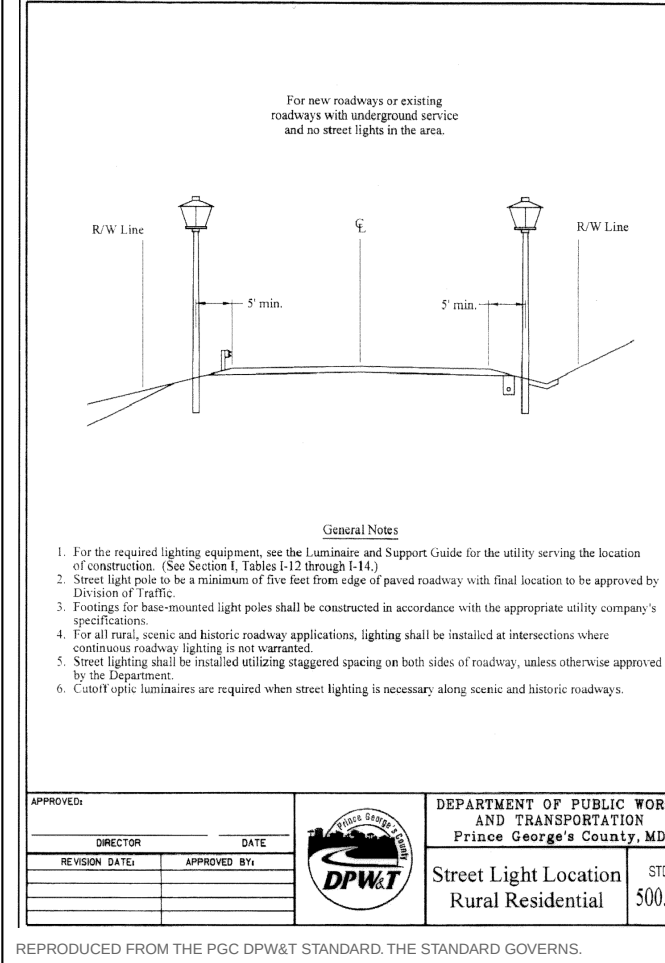

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

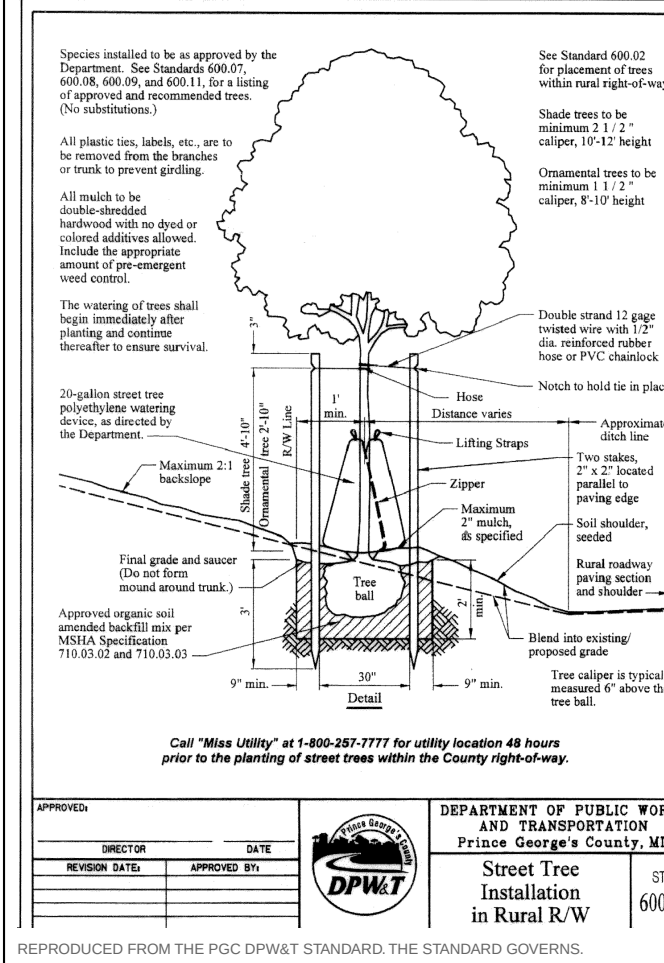



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-800 — Road, Driveway and Paving Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
9 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD83 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-800 — Road, Driveway and Paving Plan
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS REQUIRED PROVIDED	
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE MAX PROPOSED	
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD83 (feet)

SITE ANALYSIS

1. Gross tract area	165,902 SF
2. Area of dwelling	13,629 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net lot area	129,857 SF
6. TOTAL AREA DISTURBED	55,702 SF (AT LEAST)
7. SWM REQUIRED — Sec. 32-174(a)(3)	YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs. WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting
- Obtain necessary permits
- Notify Miss Utility at 811 at least 48 hours prior to any excavation
- Install stabilized construction entrance and perimeter sediment control
- Rough grade the lot
- Construct dwelling
- Install water, sewer and storm services and the driveway
- Fine grade and stabilize all disturbed areas
- Remove sediment control once the inspector gives written permission

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220560 — TRANSCRIBED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


REVISIONS

— NONE —

SOILS TABLE — USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
AcA	Adelphia-Aquasoo complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
AdA	Adelphia-Holmdel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained
AdB	Adelphia-Holmdel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained
AdC	Adelphia-Holmdel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained


STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

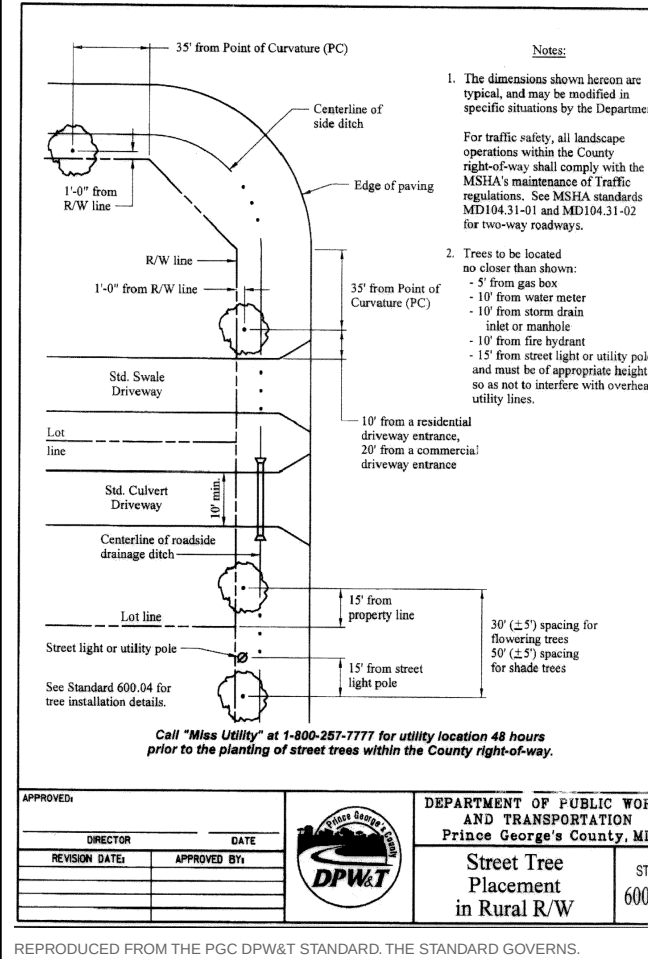

GRAPHIC SCALE — 1" = 100'


0 100 200 300 400 FEET

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

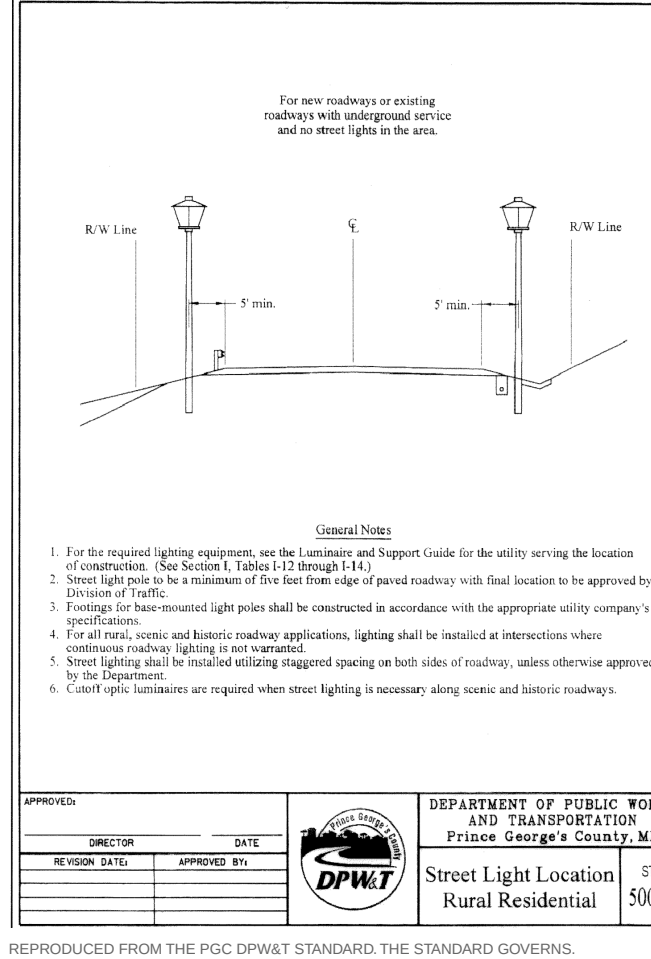

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

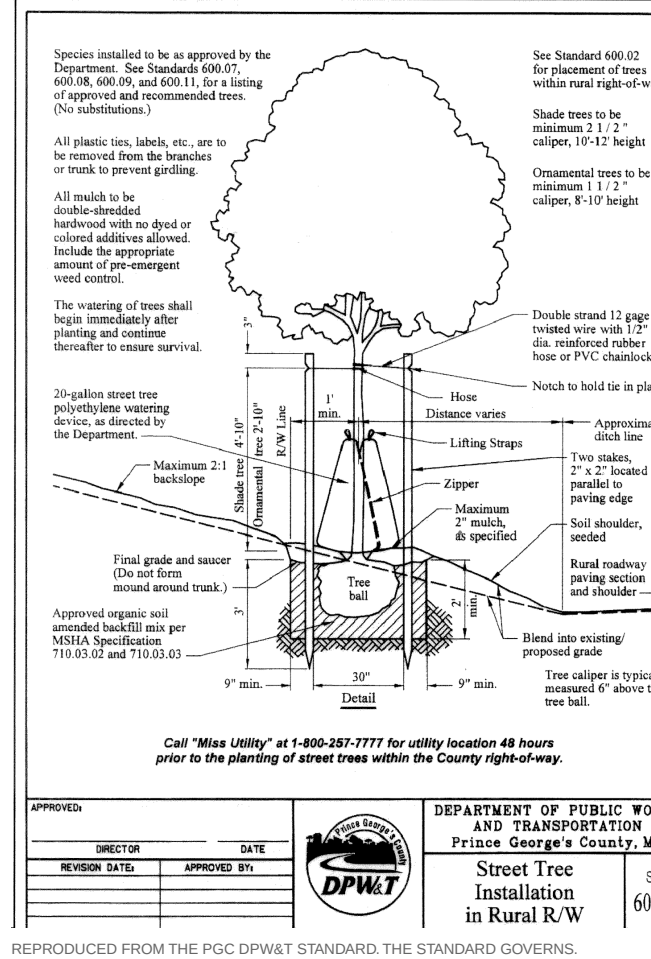

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
C-900 — Civil Details
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
10 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET C-900 — Civil Details
DISCIPLINE Maryland Professional Engineer
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
SETBACKS	REQUIRED PROVIDED
FRONT YARD	25' 25'
SIDE YARD	8' 8'
REAR YARD	20' 20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Woods area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF subfloor - HT height - STY storeys. A DASH IS NOT ZERO; no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRI Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	332
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs. WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-construction meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 2205601 — TRANSFERRED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION. EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
LICENSE NO.	EXPIRATION DATE
SEAL	


REVISIONS

— NONE —

SOILS TABLE — USDA NRCS SSURGO — PGC Code Sec. 32-130(a)(13)


MAP UNIT	MAP UNIT NAME	K-FACT	HYDRIC	HYD. GRP	DRAINAGE CLASS
AaB	Adelphi silt loam, 2 to 5 percent slopes complex	.37	No	C	Moderately well drained
AcA	Adelphi-Aquasoo complex, 0 to 2 percent slopes	.43	No	D	Somewhat poorly drained
AdA	Adelphi-Holmdel complex, 0 to 2 percent slopes	.24	No	B/D	Somewhat poorly drained
AdB	Adelphi-Holmdel complex, 2 to 5 percent slopes	.24	No	B/D	Somewhat poorly drained
AdC	Adelphi-Holmdel complex, 5 to 10 percent slopes	.24	No	B/D	Somewhat poorly drained

STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

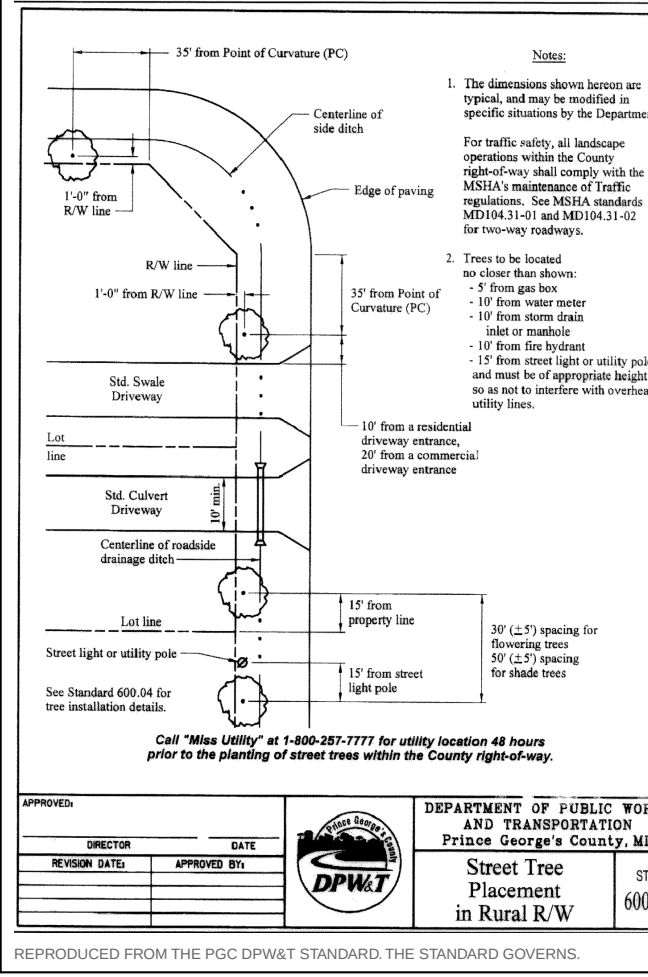


GRAPHIC SCALE — 1" = 100'
0 100 200 300 400 FEET

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

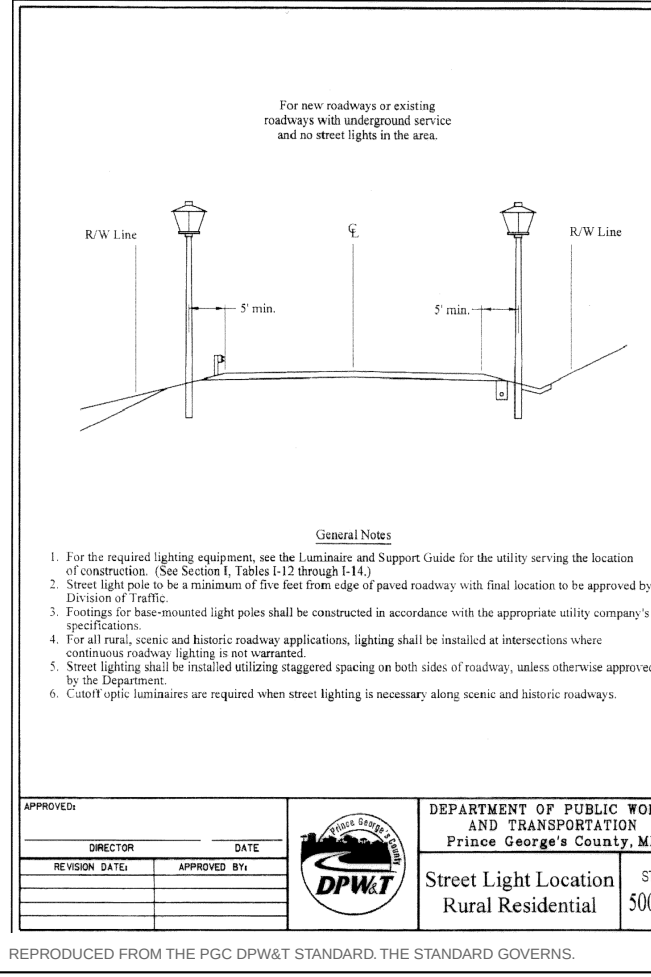

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

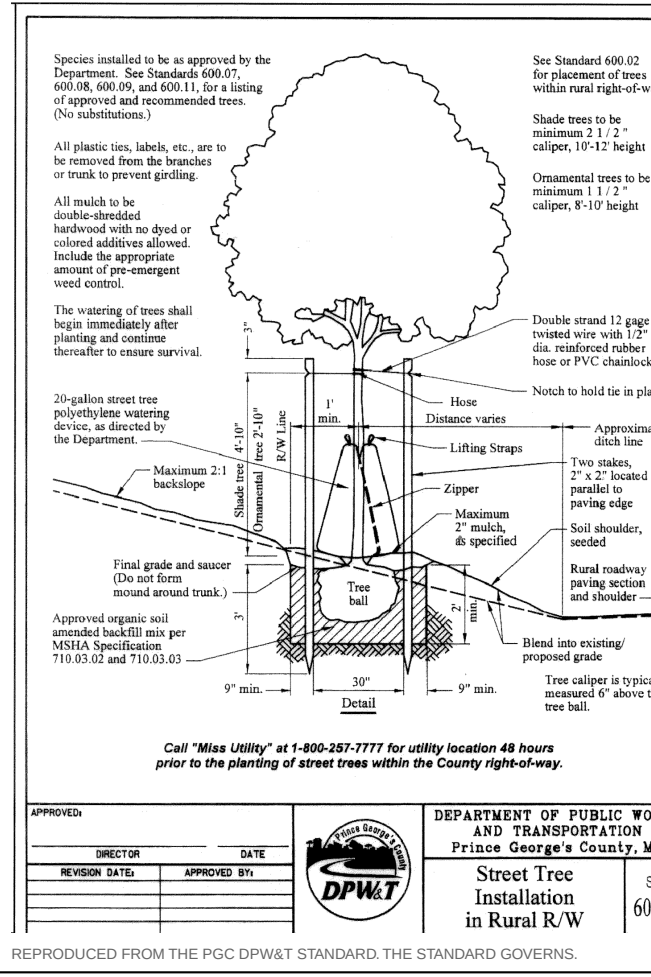

REPRODUCED FROM THE PGC DPW&T STANDARD, THE STANDARD GOVERNS.



KEALEE

Design, build, deliver

PROJECT
ESTATES AT INDIAN HEAD — LOTS 1-6
ADDRESS
200, 201, 202, 203, 204, 205 ESTATES COURT
JURISDICTION
Prince George's County, Maryland
ZONE
RR
SHEET
L-100 — Landscape and Tree Canopy Plan
SCALE
1" = 100'
STATUS
PRELIMINARY
SHEET NO.
11 OF 11
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PLAN TYPE AND PREPARATION

PLAN TYPE SITE DEVELOPMENT / FINE GRADING
SHEET L-100 — Landscape and Tree Canopy Plan
DISCIPLINE Landscape Architect / Qualified Professional
DRAWN BY KEALEE SITE-PLAN ENGINE
DESIGNED BY
CHECKED BY

REVISIONS

NO.	DATE	DESCRIPTION

INDEX OF DRAWINGS

- C-000 Cover Sheet, Approvals and General Notes
- C-100 Existing Conditions and Boundary Plan
- C-200 Overall Site and Zoning Plan
- C-300 Demolition Plan
- C-400 Grading and Drainage Plan
- C-500 Utility Plan
- C-600 Stormwater Management Plan
- C-700 Sediment and Erosion Control Plan
- C-800 Road, Driveway and Paving Plan
- C-900 Civil Details
- L-100 Landscape and Tree Canopy Plan

SITE DATA

ZONE	RR
TAX / PARCEL ID	—
GROSS TRACT AREA	165,902 SF 3.809 AC
LOT 1 AREA	19,999 SF 0.459 AC
LOT 2 AREA	20,015 SF 0.459 AC
LOT 3 AREA	20,051 SF 0.460 AC
LOT 4 AREA	20,031 SF 0.460 AC
LOT 5 AREA	20,235 SF 0.465 AC
LOT 6 AREA	29,536 SF 0.678 AC
NET LOT AREA	129,857 SF 2.981 AC
LOT 1 FRONTAGE	70' MIN 258.22'
LOT 2 FRONTAGE	70' MIN 107.40'
LOT 3 FRONTAGE	70' MIN 59.04'
LOT 4 FRONTAGE	70' MIN 89.94'
LOT 5 FRONTAGE	70' MIN 177.46'
LOT 6 FRONTAGE	70' MIN 164.74'
FRONT YARD	25'
SIDE YARD	8'
REAR YARD	20'
COVERAGE	MAX PROPOSED
LOT COVERAGE	25% 10.5%
BUILDING FOOTPRINT	— 13,629 SF
DATUM	
HORIZONTAL	EPSG:2248 NAD83
VERTICAL	NAVD88 (feet)

SITE ANALYSIS

- Gross tract area 165,902 SF
- Area of dwelling 13,629 SF
- Wooded area NOT ESTABLISHED
- Floodplain area NOT ESTABLISHED
- Net lot area 129,857 SF
- TOTAL AREA DISTURBED 55,702 SF (AT LEAST)
- SWM REQUIRED — Sec. 32-174(a)(3) YES — DISTURBANCE EXCEEDS 5,000 SF

BUILDING DATA

	G	B	FF	SF	HT	STY
LOT 1	206.14	197.47	206.47	205.47	20'	2
LOT 2	207.68	199.01	208.01	207.01	20'	2
LOT 3	209.70	201.03	210.03	209.03	20'	2
LOT 4	207.99	199.32	208.32	207.32	20'	2
LOT 5	205.67	197.00	206.00	205.00	20'	2
LOT 6	205.90	197.23	206.23	205.23	20'	2

G garage slab - B basement - FF finished floor - SF outdoor - HT height - STY storeys. A DASH IS NOT ZERO: no elevation is shown for that item.

DRAINAGE AREA COMPUTATIONS

CATCHMENT	AREA SF	IMPERV.	PRE Q	POST Q	INCREASE	WQV CF
LOT 1	19,999	16.8%	0.77	1.13	0.36	336
LOT 2	20,015	16.0%	0.77	1.13	0.36	352
LOT 3	20,051	17.4%	0.77	1.15	0.38	345
LOT 4	20,021	12.8%	0.77	1.05	0.28	275
LOT 5	20,235	17.0%	0.78	1.15	0.37	342
LOT 6	29,536	11.4%	1.14	1.50	0.36	376
PROJECT TOTAL	129,857	15.0%	5.00	7.11	2.11	2,006

Peak flows are summed lot catchments; Q in cfs. WQV is the required water-quality volume.

SEQUENCE OF CONSTRUCTION

- Pre-considering meeting 1 DAY
- Obtain necessary permits 2 DAYS
- Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY
- Install stabilized construction entrance and perimeter sediment control 2 DAYS
- Rough grade the lot 5 DAYS
- Construct dwelling 6 MONTHS
- Install water, sewer and storm services and the driveway 10 DAYS
- Fine grade and stabilize all disturbed areas 5 DAYS
- Remove sediment control once the inspector gives written permission 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 8 MONTHS

GENERAL NOTES

- CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION. FIELD-VERIFY LOCATION AND DEPTH BY TEST PIT BEFORE CONSTRUCTION.
- ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
- PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
- ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
- BOUNDARY SHOWN IS THE RECORDED PLAT OF SUBDIVISION — LOTS 1-6, ESTATES AT INDIAN HEAD — PLAT BOOK PM 228 PLAT 63 — ZONE RR — TAX MAP 151 GRID F-3 — WSSC 220560 — TRANSFERRED AND CHECKED FOR CLOSURE. THE PLAT IS THE BOUNDARY SURVEY. NO FIELD TOPOGRAPHY IS INCLUDED; EXISTING GRADE IS COUNTY LIDAR CONTOUR MAPPING.
- CONNECT TO EXISTING PAVEMENT, SHOULDER AND ROADSIDE SWALE IN LINE AND GRADE.
- DRIVEWAY CULVERTS ARE REQUIRED. THE STREET IS A RURAL OPEN SECTION EACH DRIVEWAY CROSSES THE ROADSIDE SWALE ON A 15" RCP CULVERT WITH FLARED END SECTIONS PER DPW&T STD. 600.02. NO CURB AND GUTTER IS PROPOSED.


PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.

SIGNATURE	DATE
SEAL	EXPIRATION DATE
LICENSE NO.	

REVISIONS

— NONE —

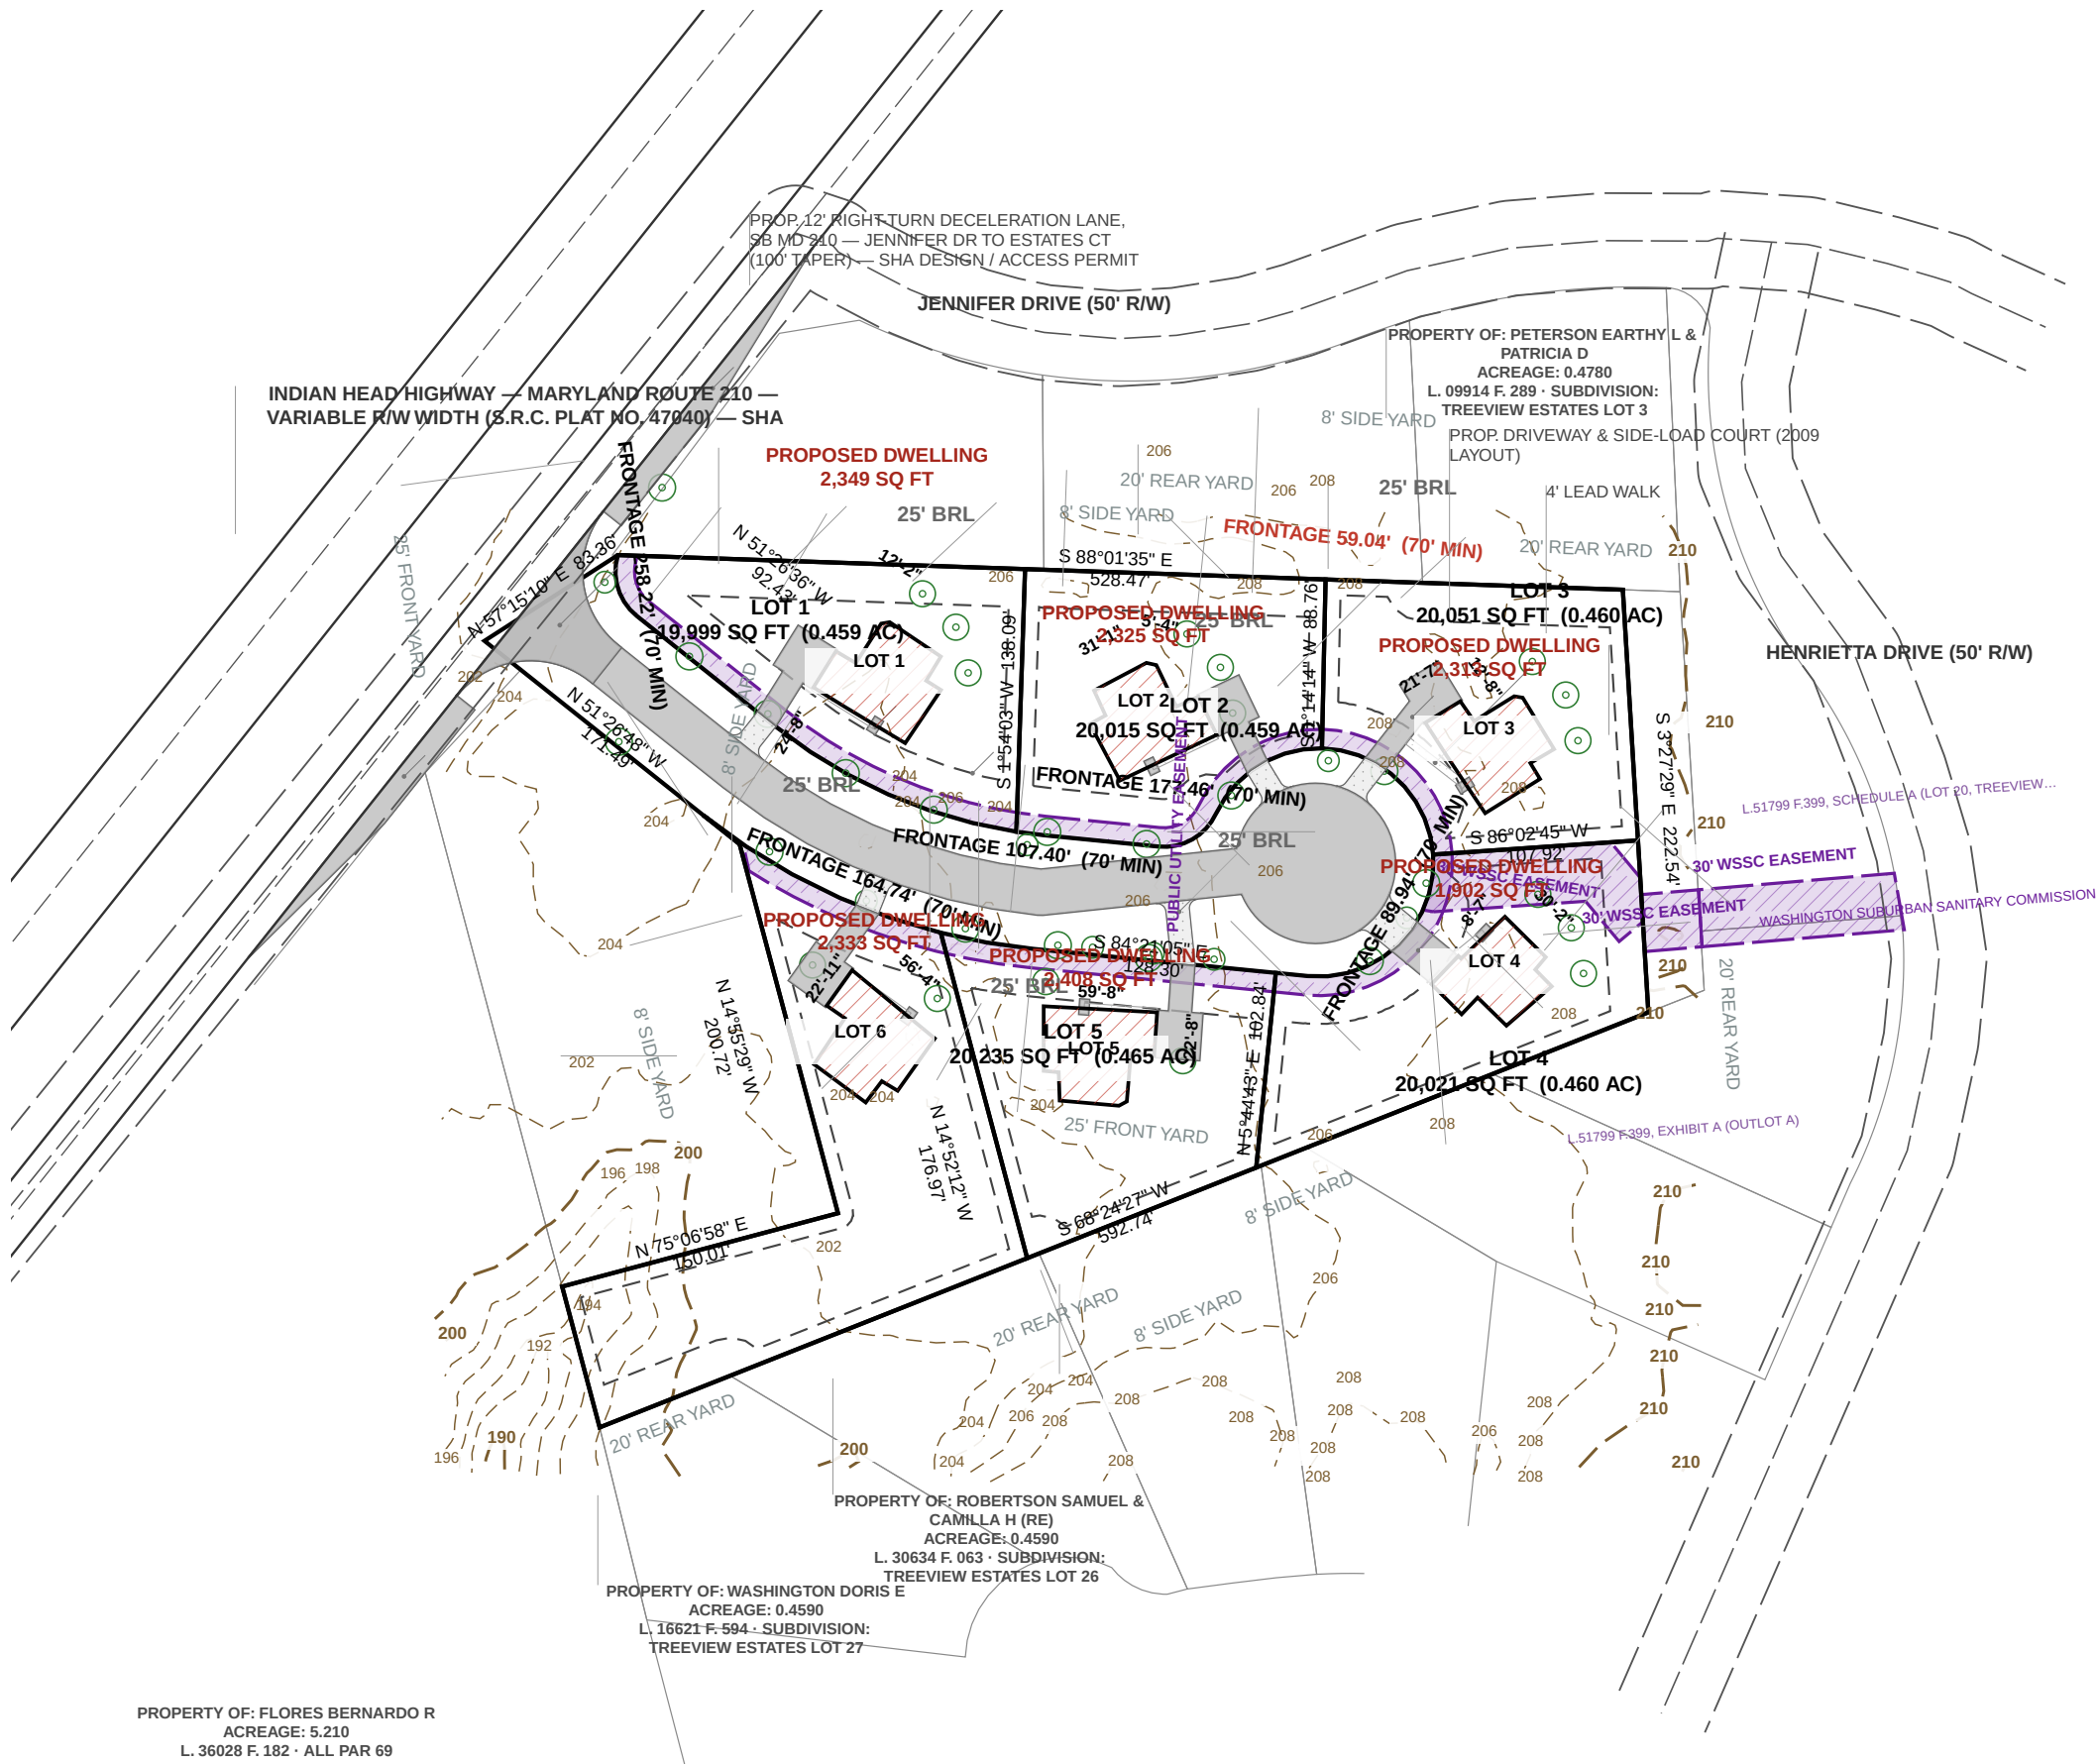

TREE CANOPY SCHEDULE

Sec. 25-128 Table 1 as amended by CB-021-2024 — 20% of NET tract area on RSP-95, met within 8' Per-lot planting per Landscape Manual Sec. 4.1(c)(3). Street trees in the right-of-way count toward canopy under Sec. 25-129.

LOT	NET AREA SF	CANOPY REQ 20% SF	SHADE PROV / REQ	ORN-EVON PROV / REQ	STREET TREES	10-YR CANOPY PROVIDED
LOT 1	19,999	4,000	3 / 3	1	NOT ESTABLISHED	
LOT 2	20,015	4,003	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 3	20,051	4,010	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 4	20,021	4,004	3 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
LOT 5	20,235	4,047	2 / 4 SHORT	0 / 3 SHORT	3	NOT ESTABLISHED
LOT 6	29,536	5,907	2 / 4 SHORT	0 / 3 SHORT	1	NOT ESTABLISHED
TOTAL	129,857	25,971	16 / 23	0 / 17	24	

TEN-YEAR CANOPY IS CREDITED PER SPECIES FROM THE PRINCE GEORGE'S COUNTY LANDSCAPE MANUAL. NO SPECIES HAS BEEN SELECTED ON THIS SET, SO THE CANOPY PROVIDED IS NOT ESTABLISHED AND THE SCHEDULE IS NOT YET BALANCED. EXISTING TREES PRESERVED ALSO COUNT.


NO TREE IS PLANTED WITHIN A STORM DRAIN EASEMENT. THE 60 FT 545E EASEMENT CARRIES THE 42 IN RCP MAIN AND THE 10 FT REAR EASEMENT CARRIES THE DRAINAGE SWALE. BOTH ARE SHOWN ON THIS SHEET AND BOTH ARE EXCLUDED FROM PLANTABLE AREA.

A VARIANCE OF THE CANOPY REQUIREMENT IS AVAILABLE UNDER SEC. 25-130.

PER LOT PLANTING IS SHORT ON EVERY LOT AS DRAWN. LANDSCAPE MANUAL SEC. 4.1(c)(3) REQUIRES 4 MAJOR SHADE AND 3 ORNAMENTAL OR EVERGREEN TREES ON A LOT OF 20,000 SF OR MORE, AND 3 AND 2 ON A LOT OF 15,000 TO 19,999 SF. NO ORNAMENTAL OR EVERGREEN TREES ARE DRAWN. AT LEAST ONE SHADE TREE MUST STAND ON THE SOUTH OR WEST SIDE WITHIN 30 FT OF THE DWELLING, AND AT LEAST ONE REQUIRED TREE IN THE FRONT YARD. SPECIES AND FINAL LOCATIONS BY THE LANDSCAPE ARCHITECT.


THE CANOPY REQUIREMENT MUST BE MET ON-SITE UNLESS A VARIANCE IS APPROVED, AND WHERE A GRADING PERMIT IS THE ONLY APPLICATION THE CANOPY NOTES BELONG ON THE GRADING PLAN — ENVIRONMENTAL TECHNICAL MANUAL PART D, SEC. 3.5.

STREET TREE PLACEMENT IN RURAL RW — SWALE & CULVERT DRIVEWAYS — PGC DPW&T STD. 600.02

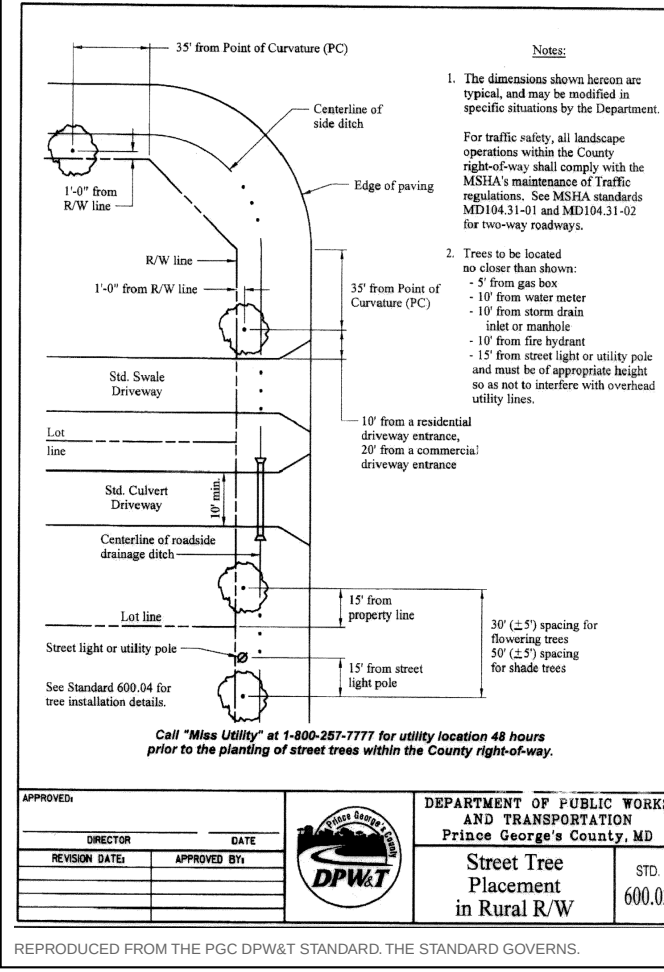


REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

STREET LIGHT LOCATION — RURAL RESIDENTIAL — PGC DPW&T STD. 600.10

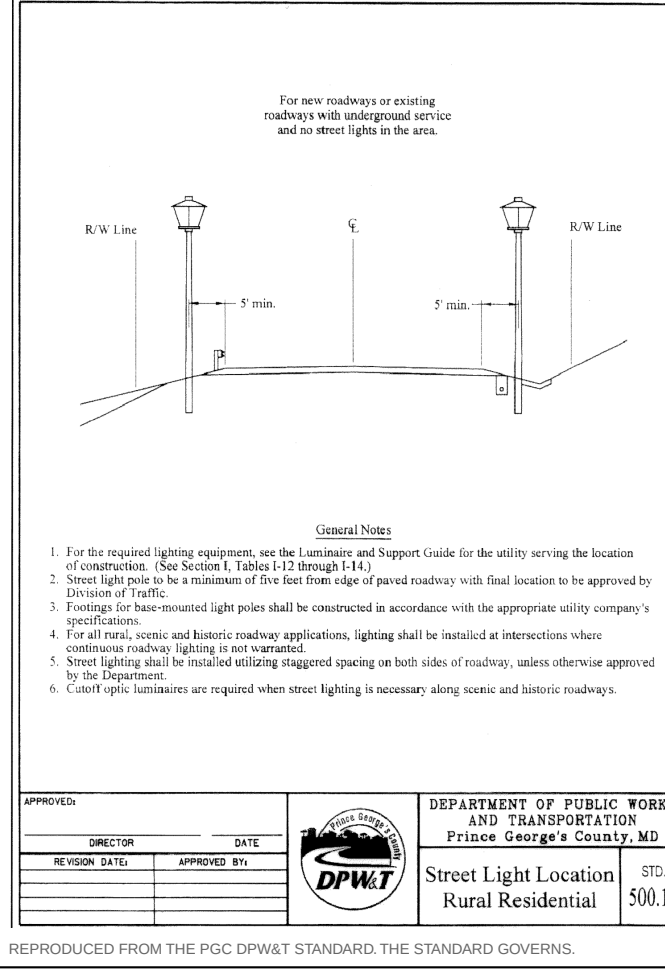

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

STREET TREE INSTALLATION IN RURAL RW — PGC DPW&T STD. 600.04

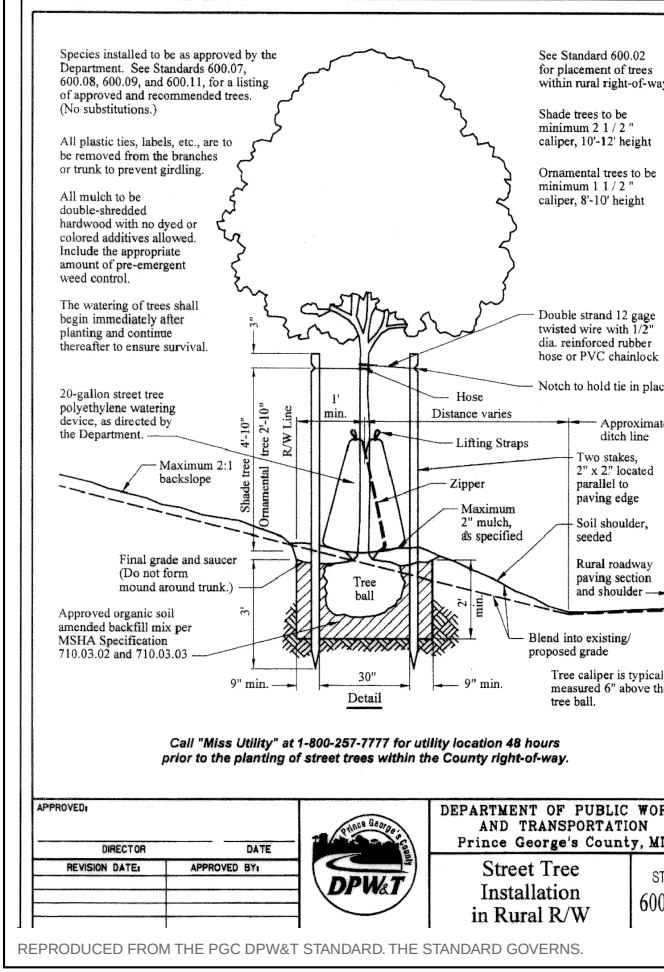

REPRODUCED FROM THE PGC DPW&T STANDARD. THE STANDARD GOVERNS.

GRAPHIC SCALE — 1" = 100'

0 100 200 300 400 FEET