

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave

ADDRESS
1009 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-100 — Existing Conditions and Boundary Plan

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
1 OF 5

COORDINATES
EPSG:2248

H: NAD83

V: NAVD83 (feet)

PROFESSIONAL RESPONSIBILITY

Maryland Licensed Surveyor

certifies boundary_determination, topographic_survey

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

SITE DATA

ZONE RSF-65

TAX / PARCEL ID 348855

GROSS LOT AREA 8,007 SF 0.184 AC

LOT FRONTAGE 45' MIN 134.64'

SETBACKS REQUIRED PROVIDED

FRONT YARD 25' 25'

SIDE YARD 8' 8'

REAR YARD 30' 30'

COVERAGE MAX PROPOSED

LOT COVERAGE 35% 12.8%

BUILDING FOOTPRINT — 1,025 SF

DATUM

HORIZONTAL EPSG:2248 NAD83

VERTICAL NAVD83 (feet)

SITE ANALYSIS

1. Gross tract area 8,007 SF

2. Area of dwelling 1,025 SF

3. Wooded area NOT ESTABLISHED

4. Floodplain area NOT ESTABLISHED

5. Net tract area 8,007 SF

6. TOTAL AREA DISTURBED NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting 1 DAY

2. Obtain necessary permits 2 DAYS

3. Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY

4. Construct stabilized construction entrance and perimeter sediment control 2 DAYS

5. Rough grade, construct dwelling, utilities and driveway 12 MONTHS

6. Fine grade and stabilize all disturbed areas 1 DAY

7. Remove sediment control devices when written permission has been granted 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.

2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 30-106.

3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.

4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.

5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

LEGEND

PROPERTY BOUNDARY

BRL — BUILDING RESTRICTION LINE

PROPOSED STRUCTURE

EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83

STREET CENTRELINE

PROPOSED PAVEMENT — DRIVEWAY / WALK

EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

REVISIONS

— NONE —

SOILS TABLE

USDA NRCS SSURGO — required by POC Code Sec. 30-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GROUP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia Aquascon complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ACB	Adelphia Aquascon complex, 0 to 2 percent slopes	37	No	C	Moderately well drained
ADA	Adelphia Hainsdel complex, 0 to 2 percent slopes	24	No	BD	Somewhat poorly drained
ADB	Adelphia Hainsdel complex, 0 to 2 percent slopes	37	No	C	Moderately well drained
AaB	Adelphia Hainsdel complex, 2 to 5 percent slopes	24	No	BD	Somewhat poorly drained
AaB	Adelphia Hainsdel complex, 2 to 5 percent slopes	37	No	C	Moderately well drained
AaC	Adelphia Hainsdel complex, 5 to 10 percent slopes	24	No	BD	Somewhat poorly drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Prince George's County / M-ACPPC — PGAtlas Property — level 1
Existing contours — Prince George's County / M-ACPPC — PGAtlas — level 1
Contours: PGAtlas Elevation/MapServer1 — Contour = 2 Ft (2023), 2 ft interval, NAVD83 (feet)

GRAPHIC SCALE — 1" = 10'

0 10 20 30 40 FEET



design, build, deliver

PROJECT
1009 Rollins Ave
ADDRESS
1009 Rollins Ave
JURISDICTION
prince georges m
ZONE
RSF-65
SHEET
C-200 — Overall
SCALE
1" = 10'
STATUS
PRELIMINARY
SHEET NO.
2 OF 5
COORDINATES
EPSG:2248
H: NAD83
V: NAVD88 (feet)

PROFESSIONAL RESPONSIBILITY
Maryland Professional Engineer
certification layout

SEAL AND SIGNATURE _____

Architect

SEAL AND SIGNATURE _____

This sheet carries content from more than one professional discipline. Each seal below applies only to the subjects listed beside it. No professional certifies content outside their stated scope, and the sheet is not divided into separate drawings for that purpose.

SITE DATA		
ZONE	RSF-65	
TAX / PARCEL ID	348955	
GROSS LOT AREA	8,007 SF	0.184 AC
LOT FRONTAGE	45 MIN	134.64
SETBACKS	REQUIRED	PROVIDED
FRONT YARD	25'	25'
SIDE YARD	5'	8'
REAR YARD	20'	
COVERAGE	MAX	PROPOSED
LOT COVERAGE	35%	12.8%
BUILDING FOOTPRINT	—	1,025 SF
DATUM		
HORIZONTAL	EPSG 2248	NAD83
VERTICAL	NAVD88 (feet)	

SITE ANALYSIS

1. Gross tract area	8,007 SF
2. Area of dwelling	1,025 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,007 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade; construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted by the inspector	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 32-106.
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

LEGEND

- PROPERTY BOUNDARY
 - - - - - BRL — BUILDING RESTRICTION LINE
 ——— PROPOSED STRUCTURE
 ——— EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
 - - - - - STREET CENTRELINE
 ——— PROPOSED PAVEMENT — DRIVEWAY / WALK
 - - - - - EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE


SIGNATURE _____ DATE _____

DPIE SITE/ROAD PLAN REVIEW DIVISION APPROVAL _____

SIGNATURE _____ DATE _____

USDA NRCS SURFNO – required by FDC Code Sec. 12 (30)(a)(15)						
SOILS TABLE	MAT. UNIT NAME	K-FACTOR	HYDRIC	HYD. GROUP ^a	DRAINAGE CLASS	
AuB	Adelphi silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained	
AuB	Adelphi Aquatic complex, 0 to 2 percent slopes	38	No	D	Moderately poorly drained	
AuB	Adelphi Aquatic complex, 0 to 2 percent slopes	38	No	C	Moderately well drained	
AsA	Adelphi Hydromel complex, 0 to 2 percent slopes	24	No	B/D	Somewhat poorly drained	
AsA	Adelphi Hydromel complex, 0 to 2 percent slopes	37	No	C	Moderately well drained	
AsA	Adelphi Hydromel complex, 2 to 5 percent slopes	24	No	B/D	Somewhat poorly drained	
AsA	Adelphi Hydromel complex, 2 to 5 percent slopes	37	No	C	Moderately well drained	
AuC	Adelphi Hydromel complex, 5 to 10 percent slopes	24	No	B/D	Somewhat poorly drained	

SOURCE AND ACCURACY
Parcel boundary — jurisdiction gis — Prince George's County / M-NCPPC — PGAtlas Property — level 1
Existing contours — Prince George's County / M-NCPPC — PGAtlas — level 1
Contours: PGAtlas Elevation/MapServer/1 — Contour - 2 Ft (2023), 2 ft interval, NAVD88 (feet)



KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave

ADDRESS
1009 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
C-400 — Grading and Drainage Plan

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
3 OF 5

COORDINATES
EPSG:2248

H: NAD83

V: NAVD83 (feet)

PROFESSIONAL RESPONSIBILITY

Maryland Professional Engineer

certificat: sherman_design

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

SITE DATA

ZONE RSF-65

TAX / PARCEL ID 348855

GROSS LOT AREA 8,007 SF

LOT FRONTAGE 45' MIN

SETBACKS REQUIRED PROVIDED

FRONT YARD 25' 25'

SIDE YARD 8' 8'

REAR YARD 30' 30'

COVERAGE MAX PROPOSED

LOT COVERAGE 35% 12.8%

BUILDING FOOTPRINT — 1,025 SF

DATUM

HORIZONTAL EPSG:2248 NAD83

VERTICAL NAVD83 (feet)

SITE ANALYSIS

1. Gross tract area 8,007 SF

2. Area of dwelling 1,025 SF

3. Wooded area NOT ESTABLISHED

4. Floodplain area NOT ESTABLISHED

5. Net tract area 8,007 SF

6. TOTAL AREA DISTURBED NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION

1. Pre-construction meeting 1 DAY

2. Obtain necessary permits 2 DAYS

3. Notify Miss Utility at 811 at least 48 hours prior to any excavation 1 DAY

4. Construct stabilized construction entrance and perimeter sediment control 2 DAYS

5. Rough grade, construct dwelling, utilities and driveway 12 MONTHS

6. Final grade and stabilize all disturbed areas 1 DAY

7. Remove sediment control devices when written permission has been granted 1 DAY

TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS

GENERAL NOTES

1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.

2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 30-106.

3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.

4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.

5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.

LEGEND

PROPERTY BOUNDARY

BRL — BUILDING RESTRICTION LINE

PROPOSED STRUCTURE

EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83

STREET CENTRELINE

PROPOSED PAVEMENT — DRIVEWAY / WALK

EASEMENT

PRINCE GEORGES COUNTY SOIL CONSERVATION DISTRICT APPROVAL

SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE DATE

DPE SITEROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE DATE

GRADING CERTIFICATE

I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE REQUIREMENTS OF SUBTITLE 32, DIVISION 2 OF THE CODE OF PRINCE GEORGES COUNTY WATER RESOURCES PROTECTION AND GRADING CODE AND THAT I OR MY STAFF HAVE INSPECTED THIS SITE AND THAT DRAINAGE FLOWS FROM UPRILL PROPERTIES ONTO THIS SITE AND FROM THIS SITE ONTO DOWNHILL PROPERTIES, HAVE BEEN ADDRESSED IN SUBSTANTIAL ACCORDANCE WITH APPLICABLE CODES, SIGNED, SCALED AND DATED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF MARYLAND.

Prince Georges County Code, Soil Erosion/Grading Design Checklist, Item A-10

STABILIZATION COMPLIANCE PREAMBLE

Stabilization practices on all projects must be in compliance with the requirements of COMAR 26.17.01 by January 9, 2013, regardless of when an erosion and sediment control plan was approved.

COMAR 26.17.01 (a) (4)(D), (5) (4)(D), (5) (4)(D), (5) (4)(D)

STANDARD STABILIZATION NOTE

Following initial soil disturbance or re-disturbance, permanent or temporary stabilization must be completed within a) Three (3) calendar days on the surface of all perimeter ditches, swales, ditches, perimeter slopes, and all slopes steeper than 3 horizontal to 1 vertical (3:1), and b) Seven (7) calendar days on all other disturbed or graded areas on the project site not under active grading.

2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control, "Standard Stabilization Note" (adopted by COMAR 26.17.01 (5)(4)(D))

REVISIONS

— NONE —

SOILS TABLE

USDA NRCS SSURGO — required by POC Code Sec. 30-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GROUP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia Aquascon complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ACB	Adelphia Aquascon complex, 0 to 2 percent slopes	37	No	C	Moderately well drained
ADA	Adelphia Hainsdel complex, 0 to 2 percent slopes	24	No	BD	Somewhat poorly drained
ADB	Adelphia Hainsdel complex, 0 to 2 percent slopes	37	No	C	Moderately well drained
AIB	Adelphia Hainsdel complex, 2 to 5 percent slopes	24	No	BD	Somewhat poorly drained
AIB	Adelphia Hainsdel complex, 2 to 5 percent slopes	37	No	C	Moderately well drained
AIC	Adelphia Hainsdel complex, 5 to 10 percent slopes	24	No	BD	Somewhat poorly drained

SOURCE AND ACCURACY


Parcel boundary — Jurisdiction gis — Prince George's County / M-ACPPC — PGAtlas Property — level 1

Existing contours — Prince George's County / M-ACPPC — PGAtlas — level 1

Contours: PGAtlas Elevation/MapServer1 — Contour - 2 Ft (2023), 2 ft interval, NAVD83 (feet)

GRAPHIC SCALE — 1" = 10'

0 10 20 30 40 FEET

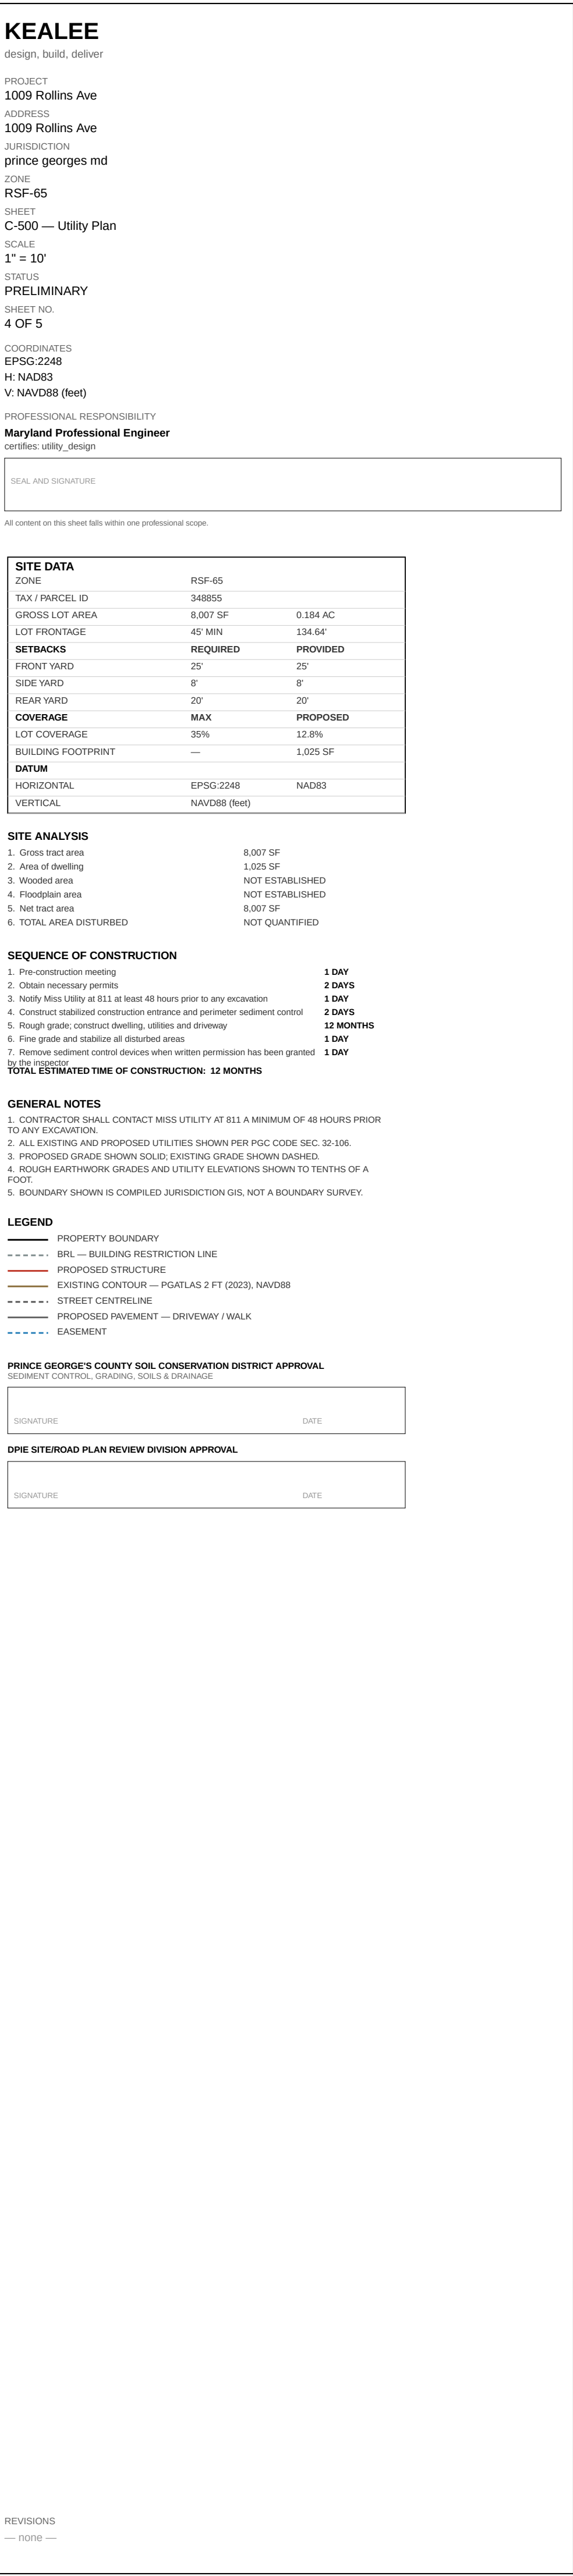

KEALEE

design, build, deliver

PROJECT
1009 Rollins Ave

ADDRESS
1009 Rollins Ave

JURISDICTION
prince georges md

ZONE
RSF-65

SHEET
L-100 — Landscape and Tree Canopy Plan

SCALE
1" = 10'

STATUS
PRELIMINARY

SHEET NO.
5 OF 5

COORDINATES
EPSG:2248

H: NAD83

V: NAVD83 (feet)

PROFESSIONAL RESPONSIBILITY

Qualified Environmental Professional

certified tree_conservation

SEAL AND SIGNATURE

All content on this sheet falls within one professional scope.

SITE DATA			
ZONE	RSF-65		
TAX / PARCEL ID	348855		
GROSS LOT AREA	8,007 SF	0.184 AC	
LOT FRONTAGE	45' MIN	134.64'	
SETBACKS	REQUIRED	PROVIDED	
FRONT YARD	25'	25'	
SIDE YARD	8'	8'	
REAR YARD	20'	20'	
COVERAGE	MAX	PROPOSED	
LOT COVERAGE	35%	12.8%	
BUILDING FOOTPRINT	—	1,025 SF	
DATUM			
HORIZONTAL	EPSG:2248	NAD83	
VERTICAL	NAVD83 (feet)		

SITE ANALYSIS	
1. Gross tract area	8,007 SF
2. Area of dwelling	1,025 SF
3. Wooded area	NOT ESTABLISHED
4. Floodplain area	NOT ESTABLISHED
5. Net tract area	8,007 SF
6. TOTAL AREA DISTURBED	NOT QUANTIFIED

SEQUENCE OF CONSTRUCTION	
1. Pre-construction meeting	1 DAY
2. Obtain necessary permits	2 DAYS
3. Notify Miss Utility at 811 at least 48 hours prior to any excavation	1 DAY
4. Construct stabilized construction entrance and perimeter sediment control	2 DAYS
5. Rough grade, construct dwelling, utilities and driveway	12 MONTHS
6. Fine grade and stabilize all disturbed areas	1 DAY
7. Remove sediment control devices when written permission has been granted	1 DAY
TOTAL ESTIMATED TIME OF CONSTRUCTION: 12 MONTHS	

GENERAL NOTES	
1. CONTRACTOR SHALL CONTACT MISS UTILITY AT 811 A MINIMUM OF 48 HOURS PRIOR TO ANY EXCAVATION.	
2. ALL EXISTING AND PROPOSED UTILITIES SHOWN PER PGC CODE SEC. 30-106.	
3. PROPOSED GRADE SHOWN SOLID; EXISTING GRADE SHOWN DASHED.	
4. ROUGH EARTHWORK GRADES AND UTILITY ELEVATIONS SHOWN TO TENTHS OF A FOOT.	
5. BOUNDARY SHOWN IS COMPILED JURISDICTION GIS, NOT A BOUNDARY SURVEY.	

LEGEND	
—	PROPERTY BOUNDARY
- - - - -	BRL — BUILDING RESTRICTION LINE
- - - - -	PROPOSED STRUCTURE
- - - - -	EXISTING CONTOUR — PGATLAS 2 FT (2023), NAVD83
- - - - -	STREET CENTRELINE
—	PROPOSED PAVEMENT — DRIVEWAY / WALK
- - - - -	EASEMENT

PRINCE GEORGE'S COUNTY SOIL CONSERVATION DISTRICT APPROVAL
SEDIMENT CONTROL, GRADING, SOILS & DRAINAGE

SIGNATURE _____ DATE _____

DPE SITE/ROAD PLAN REVIEW DIVISION APPROVAL

SIGNATURE _____ DATE _____

REVISIONS

— NONE —

SOILS TABLE

USDA NRCS SSURGO — required by POC Code Sec. 30-130(a)(13)

MAP UNIT	MAP UNIT NAME	K-FACTOR	HYDRIC	HYD. GROUP	DRAINAGE CLASS
AaB	Adelphia silt loam, 2 to 5 percent slopes complex	37	No	C	Moderately well drained
ACA	Adelphia-Aquasco complex, 0 to 2 percent slopes	43	No	D	Somewhat poorly drained
ACB	Adelphia-Aquasco complex, 0 to 2 percent slopes	37	No	C	Moderately well drained
ADA	Adelphia-Hamdel complex, 0 to 2 percent slopes	24	No	BD	Somewhat poorly drained
ADB	Adelphia-Hamdel complex, 0 to 2 percent slopes	37	No	C	Moderately well drained
AIB	Adelphia-Hamdel complex, 2 to 5 percent slopes	24	No	BD	Somewhat poorly drained
AIB	Adelphia-Hamdel complex, 2 to 5 percent slopes	37	No	C	Moderately well drained
AIC	Adelphia-Hamdel complex, 5 to 10 percent slopes	24	No	BD	Somewhat poorly drained

SOURCE AND ACCURACY
Parcel boundary — Jurisdiction gis — Prince George's County / M-ACPPC — PGAtlas Property — level 1
Existing contours — Prince George's County / M-NCPPC — PGAtlas — level 1
Contours: PGAtlas Elevation/MapServer1 — Contour = 2 Ft (2023), 2 ft interval, NAVD83 (feet)

GRAPHIC SCALE — 1" = 10'

0 10 20 30 40 FEET